

# 具有 90mW/通道功耗、 $1\text{-nV}/\sqrt{\text{Hz}}$ 噪声、14 位 65MSPS 或 12 位 80MSPS ADC 以及 CW 无源混频器的 AFE5816 16 通道超声波 AFE

## 1 特性

- 面向超声波应用的 16 通道 应用应用的 32 通道 AFE:
  - 输入衰减器、低噪声放大器 (LNA)、低通滤波器 (LPF)、模数转换器 (ADC) 和连续波 (CW) 混频器
  - 信号链针对时间增益补偿 (TGC) 和 CW 模式进行了优化
  - 数字时间增益补偿 (DTGC)
  - 总增益范围: 6dB 至 45dB
  - 线性输入范围: 1 V<sub>PP</sub>
- 具有 DTGC 功能的输入衰减器:
  - 衰减范围为 0dB 至 8dB (步长为 0.125dB)
  - 支持匹配的阻抗:
    - 50Ω 至 800Ω 的源阻抗
- 具有 DTGC 功能的低噪声放大器 (LNA):
  - 增益范围为 14dB 至 45dB (步长为 0.125dB)
  - 低输入电流噪声:  $1.2\text{pA}/\sqrt{\text{Hz}}$
- 三阶线性相位低通滤波器 (LPF):
  - 10MHz、15MHz、20MHz 和 25MHz
- 具有可编程分辨率的模数转换器 (ADC):
  - 14 位 ADC: 65MSPS 时的空闲通道信噪比 (SNR) 为 75dBFS
  - 12 位 ADC: 80MSPS 时的空闲通道 SNR 为 72dBFS
- LVDS 接口, 速率最高达 1GBPS
- 针对噪声和功耗进行了优化:
  - 90mW/通道,  $1\text{nV}/\sqrt{\text{Hz}}$  (65MSPS, TGC 模式)
  - 55mW/通道,  $1.45\text{nV}/\sqrt{\text{Hz}}$  (40MSPS, TGC 模式)
  - 59mW/通道 (CW 模式)

- 出色的器件间增益匹配:
  - $\pm 0.5\text{dB}$  (典型值)
- 低谐波失真等级:  $-60\text{dBc}$
- 快速且持续的过载恢复
- 连续波 (CW) 路径:
  - 无源混频器
  - 低近端相位噪声: 1KHz 时为  $-148\text{dBc}/\text{Hz}$
  - 相位分辨率:  $\lambda/16$
  - 支持 16X、8X、4X 和 1X CW 时钟
  - 三阶和五阶谐波 12dB 抑制
- 小型封装: 15mm x 15mm NFBGA-289

## 2 应用

- 医疗超声波成像
- 无损检测设备
- 声纳成像设备
- 多通道高速数据采集

## 3 说明

AFE5816 是一套高度集成的模拟前端 (AFE) 解决方案, 专用于需要高性能、低功耗和小尺寸的超声波系统。


器件信息<sup>(1)</sup>

器件型号	封装	封装尺寸 (标称值)
AFE5816	nFBGA (289)	15.00mm x 15.00mm

(1) 如需了解所有可用封装, 请参阅产品说明书末尾的封装选项附录。



简化框图

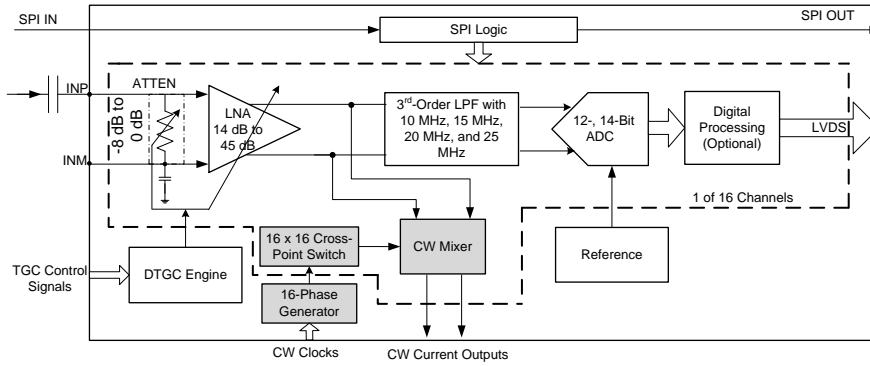

## 目录

1	特性 .....	1	9.3	Feature Description .....	31
2	应用 .....	1	9.4	Device Functional Modes .....	74
3	说明 .....	1	9.5	Programming .....	79
4	修订历史记录 .....	3	<b>10</b>	<b>Application and Implementation .....</b>	<b>81</b>
5	说明 (续) .....	4	10.1	Application Information .....	81
6	<b>Device Family Comparison Table .....</b>	<b>6</b>	10.2	Typical Application .....	81
7	<b>Pin Configuration and Functions .....</b>	<b>7</b>	10.3	Do's and Don'ts .....	85
8	<b>Specifications .....</b>	<b>11</b>	10.4	Initialization Set Up .....	85
8.1	Absolute Maximum Ratings .....	11	<b>11</b>	<b>Power Supply Recommendations .....</b>	<b>86</b>
8.2	ESD Ratings .....	11	11.1	Power Sequencing and Initialization .....	86
8.3	Recommended Operating Conditions .....	11	<b>12</b>	<b>Layout .....</b>	<b>87</b>
8.4	Thermal Information .....	13	12.1	Layout Guidelines .....	87
8.5	Electrical Characteristics: TGC Mode .....	13	12.2	Layout Example .....	88
8.6	Electrical Characteristics: CW Mode .....	16	<b>13</b>	<b>Register Maps .....</b>	<b>95</b>
8.7	Digital Characteristics .....	17	13.1	Serial Register Map .....	95
8.8	Output Interface Timing Requirements .....	18	<b>14</b>	<b>器件和文档支持 .....</b>	<b>159</b>
8.9	Serial Interface Timing Requirements .....	19	14.1	文档支持 .....	159
8.10	Typical Characteristics: TGC Mode .....	20	14.2	社区资源 .....	159
8.11	Typical Characteristics: CW Mode .....	28	14.3	商标 .....	159
<b>9</b>	<b>Detailed Description .....</b>	<b>29</b>	14.4	静电放电警告 .....	159
9.1	Overview .....	29	14.5	Glossary .....	159
9.2	Functional Block Diagram .....	30	<b>15</b>	<b>机械、封装和可订购信息 .....</b>	<b>159</b>

## 4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。

Changes from Revision D (November 2015) to Revision E	Page
Deleted <i>Output and Gain Code Step Response vs Time</i> figure .....	25
Deleted condition statement from <i>Output and Gain Code Step Response vs Time</i> figure .....	25
Changed <i>Device Power vs Gain Code</i> figure .....	26
Deleted <i>Device Power vs Gain Code (TGC_CONS register bit = 1)</i> figure .....	26
Changed <i>VCA Power vs Gain Code</i> figure .....	26
Changed <i>AVDD_1P9 Supply Current vs Gain Code</i> figure .....	27
Deleted contour curves from <i>Typical Characteristics: TGC Mode</i> section .....	27
Changed <i>Input Signal Support in TGC Mode</i> section .....	33
Added footnote 2 to <i>Profile Description for Up, Down Ramp Mode</i> table .....	40
Changed TGC_SLOPE and TGC_UP_DN clock traces in <i>External Non-Uniform Mode</i> figure .....	41
Added footnote 2 to <i>Profile Description for External Non-Uniform Mode</i> table .....	42
Changed <a href="#">Figure 72</a> .....	46
Added footnote 2 to <i>Internal Non-Uniform Mode Profile Definition</i> table .....	48
Added <i>Latency Between a Transition in TGC_SLOPE and the Resulting Change in Gain</i> table and associated paragraph to <i>Timing Specifications</i> section .....	48
Changed second sentence in sixth paragraph of <i>Continuous-Wave (CW) Beamformer</i> section .....	52
Changed <a href="#">Figure 77</a> .....	53
Changed last paragraph of <i>16 × f<sub>cw</sub> Mode</i> section .....	54
Changed <i>Clock Configurations</i> figure .....	57
Changed Number of samples from "2045" to "2047" in <a href="#">Table 15</a> .....	68
Changed <i>HPF_ROUND_ENABLE register bit (register 21, bit 5) to HPF_ROUND_EN_CH1-8 and HPF_ROUND_EN_CH9-16 bits</i> in last paragraph of <i>Digital HPF</i> section .....	70

## 修订历史记录 (接下页)

• 已添加 last paragraph to <i>Partial Power-Up and Power-Down Mode</i> section .....	77
• 已添加 PLL initialization method (step 4) to <i>Initialization Set Up</i> section .....	85
• 已添加 <i>PLL Initialization</i> section .....	87
• Changed <i>PIN_PAT_LVDS</i> to <i>PAT_LVDS15[2:0]</i> in register 59 of <i>ADC Register Map</i> table .....	98
• Added registers 65 and 66 to <i>ADC Register Map</i> table .....	98
• Changed 001 row description from <i>half frame 0, half frame 1</i> to <i>half frame 1, half frame 0</i> in <i>Pattern Mode Bit Description</i> table .....	100
• Changed <i>HPF_ROUND_EN</i> to <i>HPF_ROUND_EN_CH1-8</i> in register 21 .....	109
• Changed bit 5 from 0 to <i>HPF_ROUND_EN_CH9-16</i> in register 45 .....	123
• Changed bits 7-5 from <i>PIN_PAT_LVDS</i> to <i>PAT_LVDS15[2:0]</i> in register 59 .....	131
• Added register descriptions for registers 65 and 66 .....	133
• Deleted register 202 from <i>VCA Register Map</i> table .....	135
• 已删除 从相关文档 部分删除了 WEBENCH .....	159

### Changes from Revision C (August 2015) to Revision D

Page

• 将完整文档发布至 Web: 添加了器件比较表、引脚配置和功能 部分、规范 部分、详细 说明 部分、应用和实施 部 分、电源相关建议 部分、布局 部分以及寄存器映射 部分 .....	1
• 已更改特性部分: 已在第一个 特性 要点中添加第二个分项, 已更改 <i>ADC</i> 和针对噪声和功率进行了优化 特性 要点, 并已添加第一个分项和最后一个分项至 <i>CW</i> 特性 要点部分) .....	1
• 已更改器件信息表和简化框图 .....	1
• 已更改说明部分 .....	5
• 添加了社区资源部分 .....	159

### Changes from Revision B (June 2015) to Revision C

Page

• 从文档中删除了 AFE58JD16 .....	1
• Changed <i>Functional Block Diagram</i> : removed references to AFE58JD16 .....	30

### Changes from Revision A (April 2015) to Revision B

Page

• 从“产品预览”改为“量产数据” .....	1
-------------------------	---

## 5 说明 (续)

AFE5816 是一款集成模拟前端 (AFE), 针对医疗超声波应用进行了优化。AFE5816 是一款多芯片模块 (MCM) 器件, 包含两个芯片: VCA 和 ADC\_CONV。每个芯片均有 16 条通道。

VCA 芯片中的每条通道均可配置为两种模式: 时间增益补偿 (TGC) 模式和连续波 (CW) 模式。在 TGC 模式下, 每条通道包含一个输入衰减器 (ATTEN)、一个带有可变增益的低噪声放大器 (LNA) 以及一个三阶低通滤波器 (LPF)。衰减器支持的衰减范围为 0dB 至 8dB, LNA 支持的增益范围为 14dB 至 45dB。LPF 的截止频率可配置为 10MHz、15MHz、20MHz 或 25 MHz, 以便支持频率不同的超声波 应用。在 CW 模式下, 每条通道包含一个增益固定为 18dB 的 LNA 以及一个具有 16 种可选相位延迟的低功耗无源混频器。通过对每个模拟输入信号施加不同的相位延迟可执行片上波束赋形操作。CW 混频器中的谐波滤波器通过抑制三阶和五阶谐波来增强 CW 多普勒测量的灵敏度。CW 模式支持三种时钟模式: 16 倍频、8 倍频和 4 倍频。

ADC\_CONV 芯片的每条通道都具有一个高性能模数转换器 (ADC)，该转换器的分辨率可编程为 14 位或 12 位。ADC 在 14 位和 12 位模式下分别可实现 75dBFS 和 72dBFS 的信噪比 (SNR)。该 ADC 在低通道增益时仍具有出色的 SNR。该器件的最高运行速度为 65MSPS 和 80MSPS，分别提供 14 位和 12 位输出。ADC 设计为根据采样率调整其功耗。ADC 的输出接口为低压差分信令 (LVDS) 接口，可轻松与低成本现场可编程门阵列 (FPGA) 连接。

AFE5816 还允许选择多种功率和噪声组合，从而优化系统性能。因此，对于电池寿命要求严格的系统而言，这些器件是一套非常适合的超声波 AFE 解决方案。AFE5816 采用 15mm × 15mm NFBGA-289 封装 (ZAV 封装, S-PBGA-N289)，额定工作温度范围为 -40°C 至 +85°C。此器件还与 AFE5818 系列器件引脚兼容。的最后一段

## 6 Device Family Comparison Table

DEVICE	DESCRIPTION	PACKAGE	BODY SIZE (NOM)
<a href="#">AFE5818</a>	16-channel, ultrasound, analog front-end (AFE) with 124-mW/channel, 0.75-nV/ $\sqrt{\text{Hz}}$ noise, 14-bit, 65-MSPS or 12-bit, 80-MSPS ADC and passive CW mixer	NFBGA (289)	15.00 mm × 15.00 mm
<a href="#">AFE5812</a>	Fully integrated, 8-channel ultrasound AFE with passive CW mixer, and digital I/Q demodulator, 0.75 nV/ $\sqrt{\text{Hz}}$ , 14 and 12 bits, 65 MSPS, 180 mW/ch	NFBGA (135)	15.00 mm × 9.00 mm
<a href="#">AFE5809</a>	8-channel ultrasound AFE with passive CW mixer, and digital I/Q demodulator, 0.75 nV/ $\sqrt{\text{Hz}}$ , 14 and 12 bits, 65 MSPS, 158 mW/ch	NFBGA (135)	15.00 mm × 9.00 mm
<a href="#">AFE5808A</a>	8-channel ultrasound AFE with passive CW mixer, 0.75 nV/ $\sqrt{\text{Hz}}$ , 14 and 12 bits, 65 MSPS, 158 mW/ch	NFBGA (135)	15.00 mm × 9.00 mm
<a href="#">AFE5807</a>	8-channel ultrasound AFE with passive CW mixer, 1.05 nV/ $\sqrt{\text{Hz}}$ , 12 bits, 80 MSPS, 117 mW/ch	NFBGA (135)	15.00 mm × 9.00 mm
<a href="#">AFE5803</a>	8-channel ultrasound AFE, 0.75 nV/ $\sqrt{\text{Hz}}$ , 14 and 12 bits, 65 MSPS, 158 mW/ch	NFBGA (135)	15.00 mm × 9.00 mm
<a href="#">AFE5805</a>	8-channel ultrasound AFE, 0.85 nV/ $\sqrt{\text{Hz}}$ , 12 bits, 50 MSPS, 122 mW/ch	NFBGA (135)	15.00 mm × 9.00 mm
<a href="#">AFE5804</a>	8-channel ultrasound AFE, 1.23 nV/ $\sqrt{\text{Hz}}$ , 12 bits, 50 MSPS, 101 mW/ch	NFBGA (135)	15.00 mm × 9.00 mm
<a href="#">AFE5801</a>	8-channel variable-gain amplifier (VGA) with octal high-speed ADC, 5.5 nV/ $\sqrt{\text{Hz}}$ , 12 bits, 65 MSPS, 65 mW/ch	VQFN (64)	9.00 mm × 9.00 mm
<a href="#">AFE5851</a>	16-channel VGA with high-speed ADC, 5.5 nV/ $\sqrt{\text{Hz}}$ , 12 bits, 32.5 MSPS, 39 mW/ch	VQFN (64)	9.00 mm × 9.00 mm
<a href="#">VCA5807</a>	8-channel voltage-controlled amplifier for ultrasound with passive CW mixer, 0.75 nV/ $\sqrt{\text{Hz}}$ , 99 mW/ch	HTQFP (80)	14.00 mm × 14.00 mm
<a href="#">VCA8500</a>	8-channel, ultralow-power VGA with low-noise pre-amp, 0.8 nV/ $\sqrt{\text{Hz}}$ , 65 mW/ch	VQFN (64)	9.00 mm × 9.00 mm
<a href="#">ADS5294</a>	Octal-channel, 14-bit, 80-MSPS ADC, 75-dBFS SNR, 77 mW/ch	HTQFP (80)	14.00 mm × 14.00 mm
<a href="#">ADS5292</a>	Octal-channel, 12-bit, 80-MSPS ADC, 70-dBFS SNR, 66 mW/ch	HTQFP (80)	14.00 mm × 14.00 mm
<a href="#">ADS5295</a>	Octal-channel, 12-bit, 100-MSPS ADC, 70.6-dBFS SNR, 80 mW/ch	HTQFP (80)	14.00 mm × 14.00 mm
<a href="#">ADS5296A</a>	10-bit, 200-MSPS, 4-channel, 61-dBFS SNR, 150-mW/ch and 12-bit, 80-MSPS, 8-channel, 70-dBFS SNR, 65-mW/ch ADC	VQFN (64)	9.00 mm × 9.00 mm

## 7 Pin Configuration and Functions

**ZAV Package  
289-Bumps NFBGA  
Top View**

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
A	INP16	INP15	INP14	INP13	INP12	INP11	INP10	INP9	NC	INP8	INP7	INP6	INP5	INP4	INP3	INP2	INP1
B	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC
C	INM16	INM15	INM14	INM13	INM12	INM11	INM10	INM9	NC	INM8	INM7	INM6	INM5	INM4	INM3	INM2	INM1
D	NC	NC	CW_IP_OUTM	CW_IP_OUTP	BIAS_2P5	AVDD_3P15	AVDD_3P15	AVDD_3P15	AVDD_3P15	AVDD_3P15	AVDD_3P15	AVDD_3P15	NC	SRC_BIAS	AVSS	AVSS	AVSS
E	NC	NC	NC	NC	NC	AVDD_1P9	AVDD_1P9	AVSS	AVSS	AVSS	AVDD_1P9	AVDD_1P9	AVDD_1P9	AVDD_1P9	AVSS	CLKP_16X	CLKM_16X
F	NC	NC	NC	NC	LNA_INCM	AVDD_1P9	AVDD_1P9	AVSS	AVSS	AVSS	AVDD_1P9	AVDD_1P9	AVDD_1P9	AVDD_1P9	AVSS	AVSS	AVSS
G	NC	NC	CW_QP_OUTM	CW_QP_OUTP	BAND_GAP	AVDD_1P9	AVDD_1P9	AVSS	AVSS	AVSS	AVDD_1P9	AVDD_1P9	NC	NC	AVSS	CLKM_1X	CLKP_1X
H	AVSS	AVSS	AVSS	TGC_SLOPE	TGC_PROF<2>	AVDD_1P9	AVDD_1P9	AVSS	AVSS	AVSS	AVDD_1P9	AVDD_1P9	NC	NC	TR_EN<3>	SDOUT	NC
J	ADC_CLKP	ADC_CLKM	AVSS	TGC_UP_DN	TGC_PROF<1>	AVDD_1P9	AVDD_1P9	AVSS	AVSS	AVSS	AVDD_1P9	AVDD_1P9	NC	NC	TR_EN<4>	TR_EN<2>	SCLK
K	AVSS	AVSS	AVSS	NC	NC	AVDD_1P9	AVDD_1P9	AVSS	AVSS	AVSS	AVDD_1P9	AVDD_1P9	NC	NC	TR_EN<1>	NC	SEN
L	NC	NC	DVDD_1P2	NC	AVDD_1P8	AVDD_1P8	AVDD_1P8	AVSS	AVSS	AVSS	AVDD_1P8	AVDD_1P8	AVDD_1P8	NC	NC	SDIN	RESET
M	NC	NC	DVSS	DVDD_1P2	DVDD_1P2	DVDD_1P2	DVSS	DVSS	DVSS	DVSS	DVSS	DVDD_1P2	DVDD_1P2	DVDD_1P2	TX_TRIG	PDN_GBL	PDN_FAST
N	NC	DVDD_1P2	DVDD_1P2	DVDD_1P2	DVDD_1P2	DVDD_1P2	DVSS	DVSS	DVSS	DVSS	DVSS	DVDD_1P2	DVDD_1P2	DVDD_1P2	DVDD_1P2	DVDD_1P2	NC
P	NC	DVDD_1P2	DVDD_1P2	DVDD_1P8	DVDD_1P8	DVDD_1P8	DVDD_1P8	DVSS	DVSS	DVSS	DVDD_1P8	DVDD_1P8	DVDD_1P8	DVDD_1P8	DVDD_1P2	DVDD_1P2	NC
R	NC	DOUTP16	DOUTP15	DOUTP14	NC	DOUTM11	DOUTP11	FCLKM	NC	FCLKP	DOUTM6	DOUTP6	NC	DOUTP3	DOUTP2	DOUTP1	NC
T	NC	DOUTM16	DOUTM15	DOUTM14	DOUTP13	DOUTP12	DOUTP10	DOUTP9	DCLKP	DOUTP8	DOUTP7	DOUTP5	DOUTP4	DOUTM3	DOUTM2	DOUTM1	NC
U	NC	NC	NC	NC	DOUTM13	DOUTM12	DOUTM10	DOUTM9	DCLKM	DOUTM8	DOUTM7	DOUTM5	DOUTM4	NC	NC	NC	NC

### Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
ADC_CLKM	J2	I	Differential clock input pin used for ADC conversion, negative. A single-ended clock is also supported. Connect ADC_CLKM to dc ground when using a single-ended clock.
ADC_CLKP	J1	I	Differential clock input pin used for ADC conversion, positive. A single-ended clock is also supported. Connect the ADC clock to the ADC_CLKP pin when using a single-ended clock.
AVDD_1P8	L5-L7, L11-L13	P	Analog supply pins, 1.8 V (ADC_CONV die)
AVDD_1P9	E6, E7, E11-E14, F6, F7, F11-F14, G6, G7, G11, G12, H6, H7, H11, H12, J6, J7, J11, J12, K6, K7, K11, K12	P	Analog supply pins, 1.9 V (VCA die) <sup>(1)</sup>
AVDD_3P15	D6-D12	P	Analog supply pins, 3.15 V (VCA die)
AVSS	D15-D17, E8-E10, E15, F8-F10, F15-F17, G8-G10, G15, H1-H3, H8-H10, J3, J8-J10, K1-K3, K8-K10, L8-L10	G	Analog ground pins
BAND_GAP	G5	O	Bypass to analog ground with a 1- $\mu$ F capacitor.
BIAS_2P5	D5	O	Bypass to analog ground with a 1- $\mu$ F capacitor.
CLKM_1X	G16	I	Differential clock input for the 1X CW clock, negative. A single-ended clock is also supported. In single-ended clock mode, the CLKM_1X pin is internally pulled to ground. In 1X clock mode, this pin is the negative quadrature-phase clock input for the CW mixer. <sup>(2)</sup>
CLKP_1X	G17	I	Differential clock input for the 1X CW clock, positive. A single-ended clock is also supported. Connect the 1X CW clock to the CLKP_1X pin when using a single-ended clock. In 1X clock mode, this pin is the positive quadrature-phase clock input for the CW mixer. <sup>(2)</sup>
CLKM_16X	E17	I	Differential clock input for the 16X, 8X, and 4X CW clocks, negative. A single-ended clock is also supported. In single-ended clock mode, the CLKM_16X pin is internally pulled to ground. <sup>(2)</sup>
CLKP_16X	E16	I	Differential clock input for the 16X, 8X, and 4X CW clocks, positive. A single-ended clock is also supported. Connect the 16X CW clock to the CLKP_16X pin when using a single-ended clock. In 1X CW clock mode, this pin is the positive in-phase clock input for the CW mixer. <sup>(2)</sup>
CW_IP_OUTM	D3	O	In-phase CW differential summed current output, negative. <sup>(2)</sup>
CW_IP_OUTP	D4	O	In-phase CW differential summed current output, positive. <sup>(2)</sup>
CW_QP_OUTM	G3	O	Quadrature-phase CW differential summed current output, negative. <sup>(2)</sup>
CW_QP_OUTP	G4	O	Quadrature-phase CW differential summed current output, positive. <sup>(2)</sup>
DCLKM	U9	O	Low-voltage differential signaling (LVDS) serialized data clock outputs (receiver bit alignment)
DCLKP	T9		
DOUTM1	T16	O	LVDS serialized differential data outputs for channel 1
DOUTP1	R16		
DOUTM2	T15	O	LVDS serialized differential data outputs for channel 2
DOUTP2	R15		
DOUTM3	T14	O	LVDS serialized differential data outputs for channel 3
DOUTP3	R14		
DOUTM4	U13	O	LVDS serialized differential data outputs for channel 4
DOUTP4	T13		
DOUTM5	U12	O	LVDS serialized differential data outputs for channel 5
DOUTP5	T12		
DOUTM6	R11	O	LVDS serialized differential data outputs for channel 6
DOUTP6	R12		
DOUTM7	U11	O	LVDS serialized differential data outputs for channel 7
DOUTP7	T11		
DOUTM8	U10	O	LVDS serialized differential data outputs for channel 8
DOUTP8	T10		
DOUTM9	U8	O	LVDS serialized differential data outputs for channel 9
DOUTP9	T8		

(1) In low-power mode, the typical power supply for AVDD\_1P9 is 1.8 V.

(2) When CW mode is not used, this pin can be floated.



**Pin Functions (continued)**

PIN		I/O	DESCRIPTION
NAME	NO.		
DOUTM10	U7	O	LVDS serialized differential data outputs for channel 10
DOUTP10	T7		
DOUTM11	R6	O	LVDS serialized differential data outputs for channel 11
DOUTP11	R7		
DOUTM12	U6	O	LVDS serialized differential data outputs for channel 12
DOUTP12	T6		
DOUTM13	U5	O	LVDS serialized differential data outputs for channel 13
DOUTP13	T5		
DOUTM14	T4	O	LVDS serialized differential data outputs for channel 14
DOUTP14	R4		
DOUTM15	T3	O	LVDS serialized differential data outputs for channel 15
DOUTP15	R3		
DOUTM16	T2	O	LVDS serialized differential data outputs for channel 16
DOUTP16	R2		
DVDD_1P2	L3, M4-M6, M12-M14, N2-N6, N12-N16, P2, P3, P15, P16	P	1.2-V digital supply pins for the ADC digital block
DVDD_1P8	P4-P7, P11-P14	P	1.8-V digital supply pins for the ADC digital, digital I/Os, phase-locked loop (PLL), and LVDS interface blocks
DVSS	M3, M7-M11, N7-N11, P8-P10	G	Digital ground (ADC_CONV die).
FCLKM	R8	O	LVDS serialized differential frame clock outputs (receiver word alignment).
FCLKP	R10		
INM1	C17	I	Complementary analog input for channel 1. <sup>(3)</sup>
INM2	C16	I	Complementary analog input for channel 2. <sup>(3)</sup>
INM3	C15	I	Complementary analog input for channel 3. <sup>(3)</sup>
INM4	C14	I	Complementary analog input for channel 4. <sup>(3)</sup>
INM5	C13	I	Complementary analog input for channel 5. <sup>(3)</sup>
INM6	C12	I	Complementary analog input for channel 6. <sup>(3)</sup>
INM7	C11	I	Complementary analog input for channel 7. <sup>(3)</sup>
INM8	C10	I	Complementary analog input for channel 8. <sup>(3)</sup>
INM9	C8	I	Complementary analog input for channel 9. <sup>(3)</sup>
INM10	C7	I	Complementary analog input for channel 10. <sup>(3)</sup>
INM11	C6	I	Complementary analog input for channel 11. <sup>(3)</sup>
INM12	C5	I	Complementary analog input for channel 12. <sup>(3)</sup>
INM13	C4	I	Complementary analog input for channel 13. <sup>(3)</sup>
INM14	C3	I	Complementary analog input for channel 14. <sup>(3)</sup>
INM15	C2	I	Complementary analog input for channel 15. <sup>(3)</sup>
INM16	C1	I	Complementary analog input for channel 16. <sup>(3)</sup>
INP1	A17	I	Analog input for channel 1. AC-couple to device input with a 10-nF capacitor.
INP2	A16	I	Analog input for channel 2. AC-couple to device input with a 10-nF capacitor.
INP3	A15	I	Analog input for channel 3. AC-couple to device input with a 10-nF capacitor.
INP4	A14	I	Analog input for channel 4. AC-couple to device input with a 10-nF capacitor.
INP5	A13	I	Analog input for channel 5. AC-couple to device input with a 10-nF capacitor.
INP6	A12	I	Analog input for channel 6. AC-couple to device input with a 10-nF capacitor.
INP7	A11	I	Analog input for channel 7. AC-couple to device input with a 10-nF capacitor.
INP8	A10	I	Analog input for channel 8. AC-couple to device input with a 10-nF capacitor.
INP9	A8	I	Analog input for channel 9. AC-couple to device input with a 10-nF capacitor.
INP10	A7	I	Analog input for channel 10. AC-couple to device input with a 10-nF capacitor.
INP11	A6	I	Analog input for channel 11. AC-couple to device input with a 10-nF capacitor.

(3) The LNA high-pass filter (HPF) response of the channel depends on the capacitor connected at the INMx pin. By default, leave this pin floating. For very low-frequency applications, connect a capacitor > 1  $\mu$ F.

**Pin Functions (continued)**

PIN		I/O	DESCRIPTION
NAME	NO.		
INP12	A5	I	Analog input for channel 12. AC-couple to device input with a 10-nF capacitor.
INP13	A4	I	Analog input for channel 13. AC-couple to device input with a 10-nF capacitor.
INP14	A3	I	Analog input for channel 14. AC-couple to device input with a 10-nF capacitor.
INP15	A2	I	Analog input for channel 15. AC-couple to device input with a 10-nF capacitor.
INP16	A1	I	Analog input for channel 16. AC-couple to device input with a 10-nF capacitor.
LNA_INCM	F5	O	Bypass to ground with a 1- $\mu$ F capacitor.
NC	A9, B1-B17, C9, D1, D2, D13, E1-E5, F1-F4, G1, G2, G13, G14, H13, H14, H17, J13, J14, K4, K5, K13, K14, K16, L1, L2, L4, L14, L15, M1, M2, R5, R9, R13, N1, N17, P1, R1, R17, P17, T1, T17, U1-U4, U14-U17	—	Unused pins; do not connect
PDN_FAST	M17	I	Partial power-down control pin for the entire device with an internal 16-k $\Omega$ pull-down resistor; active high. <sup>(4)</sup>
PDN_GBL	M16	I	Global (complete) power-down control pin for the entire device with an internal 16-k $\Omega$ pull-down resistor; active high. <sup>(4)</sup>
RESET	L17	I	Hardware reset pin with an internal 16-k $\Omega$ pull-down resistor; active high. <sup>(4)</sup>
SCLK	J17	I	Serial programming interface clock pin with an internal 16-k $\Omega$ pull-down resistor. <sup>(4)</sup>
SDIN	L16	I	Serial programming interface data pin with an internal 16-k $\Omega$ pull-down resistor. <sup>(4)</sup>
SDOUT	H16	O	Serial programming interface readout pin. This pin is in tri-state by default. <sup>(4)</sup>
SEN	K17	I	Serial programming interface enable pin, active low. This pin has a 16-k $\Omega$ pullup resistor. <sup>(4)</sup>
SRC_BIAS	D14	O	Bypass to ground with a 1- $\mu$ F capacitor.
TGC_PROF<1>	J5	I	Digital TGC profile 1 select pin. This pin has an internal 150-k $\Omega$ pull-down resistor; active high. <sup>(4)</sup>
TGC_PROF<2>	H5	I	Digital TGC profile 2 select pin. This pin has an internal 150-k $\Omega$ pull-down resistor; active high. <sup>(4)</sup>
TGC_SLOPE	H4	I	Digital TGC control pin. This pin has an internal 150-k $\Omega$ pull-down resistor. <sup>(4)</sup>
TGC_UP_DN	J4	I	Digital TGC control pin. This pin has an internal 150-k $\Omega$ pull-down resistor. <sup>(4)</sup>
TR_EN<1>	K15	I	TR enable pin 1; disconnects the LNA HPF from the input pins of channels 1 to 4. <sup>(4)</sup> This pin has an internal 150-k $\Omega$ pullup resistor.
TR_EN<2>	J16	I	TR enable pin 2; disconnects the LNA HPF from the input pins of channels 5 to 8. <sup>(4)</sup> This pin has an internal 150-k $\Omega$ pullup resistor.
TR_EN<3>	H15	I	TR enable pin 3; disconnects the LNA HPF from the input pins of channels 9 to 12. <sup>(4)</sup> This pin has an internal 150-k $\Omega$ pullup resistor.
TR_EN<4>	J15	I	TR enable pin 4; disconnects the LNA HPF from the input pins of channels 13 to 16. <sup>(4)</sup> This pin has an internal 150-k $\Omega$ pullup resistor.
TX_TRIG	M15	I	This pin synchronizes test patterns across devices. This pin has a 20-k $\Omega$ pull-down resistor. <sup>(4)</sup>

(4) A 1.8-V logic level is required.

**Table 1. Pin Name to Signal Name Map**

SIGNAL NUMBER	PIN NAME	SIGNAL NAME
1	ADC_CLKP – ADC_CLKM	ADC_CLK
2	CLKP_1X – CLKM_1X	CW_CLK1X
3	CLKP_16X – CLKM_16X	CW_CLK_NX
4	CW_IP_OUTP – CW_IP_OUTM	CW_IP_OUT
5	CW_QP_OUTP – CW_QP_OUTM	CW_QP_OUT
6	DOU TPx – DOU TMx	DOU T
7	FCLKP – FCLKM	FCLK
8	DCLKP – DCLKM	DCLK
9	CMLx_OUTP – CMLx_OUTM	CMLx_OUT

## 8 Specifications

### 8.1 Absolute Maximum Ratings

over operating free-air temperature range, unless otherwise noted<sup>(1)</sup>

		MIN	MAX	UNIT
Supply voltage range	AVDD_1P8	-0.3	2.2	V
	AVDD_1P9	-0.3	2.2	
	AVDD_3P15	-0.3	3.9	
	DVDD_1P2	-0.3	1.35	
	DVDD_1P8	-0.3	2.2	
Voltage at analog inputs		-0.3	Minimum [2.2, (AVDD_1P9 + 0.3)]	V
Voltage at digital inputs		-0.3	Minimum [2.2, (AVDD_1P9 + 0.3), (DVDD_1P8 + 0.3)]	V
Temperature	Maximum junction temperature (T <sub>J</sub> ), any condition		105	°C
	Storage, T <sub>stg</sub>	-55	150	

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 8.2 ESD Ratings

			VALUE	UNIT
V <sub>(ESD)</sub>	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±1000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup>	±250	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 8.3 Recommended Operating Conditions

over operating free-air temperature range, unless otherwise noted

PARAMETER		MIN	TYP	MAX	UNIT
<b>SUPPLIES</b>					
V <sub>A_1P8</sub>	AVDD_1P8 voltage	1.7	1.8	1.9	V
V <sub>A_1P9</sub>	AVDD_1P9 voltage	Low-noise mode, medium-power mode		2.0	V
		Low-power mode		1.75	
V <sub>A_3P15</sub>	AVDD_3P15 voltage	3	3.15	3.3	V
V <sub>D_1P2</sub>	DVDD_1P2 voltage	1.15	1.2	1.25	V
V <sub>D_1P8</sub>	DVDD_1P8 voltage	1.7	1.8	1.9	V
<b>TEMPERATURE</b>					
T <sub>A</sub>	Ambient temperature	-40		85	°C
<b>BIAS VOLTAGES</b>					
Common-mode voltage <sup>(1)</sup>	ADC_CLKP, ADC_CLKM in differential mode			0.7	V
	CLKP_1X, CLKM_1X, CLKP_16X, CLKM_16X in differential mode			1.5	
	CW_IP_OUTP, CW_IP_OUTM, CW_QP_OUTP, CW_QP_OUTM			0.9	
	(INM1, INP1), (INM2, INP2)...(INM16, INP16)			1	
Bias voltage <sup>(1)</sup>	BAND_GAP			1.2	V
	BIAS_2P5			2.5	
	LNA_INCM			1	
	SRC_BIAS			0.5	

(1) Internally set by the device.

**Recommended Operating Conditions (continued)**

over operating free-air temperature range, unless otherwise noted

PARAMETER			MIN	TYP	MAX	UNIT
<b>ADC CLOCK INPUT: ADC_CLK</b>						
f <sub>CLKIN</sub>	ADC clock frequency	14-bit ADC resolution	5		65	MHz
		12-bit ADC resolution	5		80	
V <sub>DEADC</sub>	Differential clock amplitude	Sine-wave, ac-coupled	0.7			V <sub>PP</sub>
		LVPECL, ac-coupled		1.6		
		LVDS, ac-coupled		0.7		
V <sub>SEADC</sub>	Single-ended clock amplitude	LVC MOS on ADC_CLKP with ADC_CLKM grounded		1.8		V
D <sub>ADC</sub>	ADC_CLK duty cycle		40%	50%	60%	
<b>CW CLOCK INPUT: CW_CLK1X, CW_CLK_NX</b>						
CW <sub>CLK</sub>	CW clock frequency	CW_CLK1X across CW clock modes in relation to CW_CLK1X; see the CW_CLK_MODE register bits in <a href="#">register 192</a>			8	MHz
		CW_CLK_NX across CW clock modes; see the CW_CLK_MODE register bits in <a href="#">register 192</a>	16X mode		16X	
			8X mode		8X	
			4X mode		4X	
V <sub>DECW</sub>	Differential clock amplitude	CW_CLK1X, CW_CLK_NX. LVDS, ac-coupled		0.7		V <sub>PP</sub>
V <sub>SECW</sub>	Single-ended clock amplitude	LVC MOS on CLKP_1X, CLKP_16X with CLKM_1X, CLKM_16X grounded or floating		3.15		V
D <sub>CW</sub>	CLK duty cycle	CW_CLK1X, CW_CLK_NX	40%	50%	60%	
<b>DIGITAL OUTPUT (LVDS)</b>						
R <sub>L</sub>	Differential load resistance			100		Ω

## 8.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		AFE5816	
		ZAV (NFBGA)	UNIT
		289 PINS	
R <sub>θJA</sub>	Junction-to-ambient thermal resistance	26.1	°C/W
R <sub>θJC(top)</sub>	Junction-to-case (top) thermal resistance	5.6	°C/W
R <sub>θJB</sub>	Junction-to-board thermal resistance	11.7	°C/W
ψ <sub>JT</sub>	Junction-to-top characterization parameter	0.2	°C/W
ψ <sub>JB</sub>	Junction-to-board characterization parameter	11.0	°C/W
R <sub>θJC(bot)</sub>	Junction-to-case (bottom) thermal resistance	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

## 8.5 Electrical Characteristics: TGC Mode

At T<sub>A</sub> = 25°C, unless otherwise noted. **Supply:** AVDD\_1P8 = 1.8 V, AVDD\_1P9 = 1.9 V, AVDD\_3P15 = 3.15 V, and DVDD\_1P2 = 1.2 V, DVDD\_1P8 = 1.8 V. **Input to the device:** input signal is ac-coupled to INP with a 10-nF capacitor and is applied with source resistance R<sub>S</sub> = 50 Ω at frequency f<sub>IN</sub> = 5 MHz, and a 50-MHz differential clock is applied on ADC\_CLK. **Device settings:** gain code = 319 (total gain = 45 dB), 14-bit ADC resolution, LVDS interface to capture ADC data, and output amplitude V<sub>OUT</sub> = -1 dBFS. Minimum and maximum values are specified across the full temperature range.

PARAMETER		TEST CONDITION	MIN	TYP	MAX	UNIT
<b>GENERAL</b>						
V <sub>MAX</sub>	Maximum linear input voltage	At INP_SOURCE node; see the <a href="#">Functional Block Diagram</a> section	1			V <sub>PP</sub>
		At INPx node; see the <a href="#">Functional Block Diagram</a> section	0.4			
C <sub>INP</sub>	Input capacitance		35			pF
G <sub>CODE</sub>	Gain code <sup>(1)</sup>	Programs the total gain	0	319		
G <sub>TOT</sub>	Total gain	Low-noise mode and medium-power mode	(6 + 0.125 × G <sub>CODE</sub> )			dB
		Low-power mode	(12 + 0.125 × G <sub>CODE</sub> )			
G <sub>RANGE</sub>	Gain range		39			dB
G <sub>SLOPE</sub>	Gain slope		0.125			dB/G <sub>CODE</sub>
T <sub>TGC</sub>	TGC response time	G <sub>CODE</sub> changed from 64 to 319	10			μs
V <sub>N,IRN</sub>	Input voltage noise	R <sub>S</sub> = 0 Ω, calculated in band of 4-MHz to 6-MHz frequency	Low-noise mode	1		nV/√Hz
			Medium-power mode	1.3		
			Low-power mode	1.45		
I <sub>N,IRN</sub>	Input-referred current noise	Across low-noise, medium-power, and low-power mode	1.2			pA/√Hz
NF	Noise figure <sup>(2)</sup>	R <sub>S</sub> = 50 Ω	Low-noise mode	3.6		dB
			Medium-power mode	4.5		
			Low-power mode	5.0		
		R <sub>S</sub> = 400 Ω	Low-noise mode	1.2		dB
			Medium-power mode	1.5		
			Low-power mode	1.6		

(1) The gain code range from 0 to 63 controls the input attenuation and the gain code range from 64 to 319 controls the LNA gain.

(2) NF is measured as the SNR at the output of the device relative to the SNR at the input resulting from the noise of source resistance R<sub>S</sub>.

**Electrical Characteristics: TGC Mode (continued)**

At T<sub>A</sub> = 25°C, unless otherwise noted. **Supply:** AVDD\_1P8 = 1.8 V, AVDD\_1P9 = 1.9 V, AVDD\_3P15 = 3.15 V, and DVDD\_1P2 = 1.2 V, DVDD\_1P8 = 1.8 V. **Input to the device:** input signal is ac-coupled to INP with a 10-nF capacitor and is applied with source resistance R<sub>S</sub> = 50 Ω at frequency f<sub>IN</sub> = 5 MHz, and a 50-MHz differential clock is applied on ADC\_CLK. **Device settings:** gain code = 319 (total gain = 45 dB), 14-bit ADC resolution, LVDS interface to capture ADC data, and output amplitude V<sub>OUT</sub> = -1 dBFS. Minimum and maximum values are specified across the full temperature range.

PARAMETER		TEST CONDITION		MIN	TYP	MAX	UNIT
<b>GENERAL (continued)</b>							
K <sub>CORR</sub>	Channel-to-channel noise correlation factor <sup>(3)</sup>	Without a signal, calculated in a 1-MHz to 10-MHz bandwidth	R <sub>S</sub> = 330 Ω		-20		dB
			R <sub>S</sub> = 100 Ω		-26		
		With a signal, calculated in a 1-MHz to 10-MHz bandwidth	Total gain = 45 dB		-17		
			Total gain = 26 dB		-14		
With a signal, calculated in a 1-MHz bandwidth around a 5-MHz input signal frequency	Total gain = 45 dB		-13				
	Total gain = 26 dB		-10				
SNR	Signal-to-noise ratio	SNR calculated in 750 kHz to Nyquist bandwidth	Total gain = 14 dB	65	68		dBFS
			Total gain = 45 dB	55	58		
SNR <sub>NB</sub>	Narrow-band SNR	SNR calculated in 2-MHz bandwidth around input signal frequency	Total gain = 30 dB	72.5	76		dBFS
LPF	3rd-order, low-pass filter	-3-dB cutoff frequency across LPF_PROG register settings; see register 199	Low-noise and medium-power mode		10		MHz
					15		
					20		
					25		
			Low-power mode		5		
					7.5		
					10		
					12.5		
Δ <sub>LPF</sub>	LPF bandwidth variation				±5%		
Δ <sub>Gr</sub>	Channel-to-channel group delay matching	2-MHz to 15-MHz input signal frequency			2		ns
Δ <sub>φ</sub>	Channel-to-channel phase matching	15-MHz signal			11		Degrees
G <sub>MATCH</sub>	Gain matching	Device-to-device, average across channels	G <sub>CODE</sub> < 64		±0.5		dB
			G <sub>CODE</sub> > 64	-1	±0.5	1	
		Channel-to-channel, same device	G <sub>CODE</sub> < 64		±0.5		
			G <sub>CODE</sub> > 64	-1	±0.5	1	
HD2	Second-order harmonic distortion	Output amplitude = -1 dBFS, gain = 45 dB			-65		dBc
		Output amplitude = -1 dBFS, gain = 6 dB			-55		
HD3	Third-order harmonic distortion	Output amplitude = -1 dBFS, gain = 45 dB			-60		dBc
		Output amplitude = -1 dBFS, gain = 6 dB			-60		
THD	Total harmonic distortion	Output amplitude = -1 dBFS, gain = 45 dB			-58		dBc
		Output amplitude = -1 dBFS, gain = 6 dB			-54		
IMD3	Third-order intermodulation distortion	Input frequency 1 = 5 MHz at -1 dBFS, input frequency 2 = 5.01 MHz at -21 dBFS			-75		dBc
XTALK	Fundamental crosstalk	Signal applied to a single channel. Crosstalk measured on neighboring channel.			-55		dBc
PN <sub>1kHz</sub>	Phase noise	Calculated at 1-kHz offset from 5-MHz input signal frequency			-129		dBc/Hz
V <sub>ORO</sub>	Output offset				±600		LSB
G <sub>LNA</sub>	LNA gain range in TGC mode				14 to 45		dB

(3) The noise-correlation factor is defined as 10 × log<sub>10</sub>[Nc / (Nc + Nu)], where Nc is the correlated noise power in a single channel and Nu is the uncorrelated noise power in a single channel. The noise-correlation factor measurement is described by the equation:

$$\frac{Nc}{(Nu + Nc)} = \frac{N_{16Ch}}{(N_{1Ch} \times 240)} - \frac{1}{15}$$

where N<sub>16CH</sub> is the noise power of the summed 16 channels and N<sub>1CH</sub> is the noise power of one channel.

**Electrical Characteristics: TGC Mode (continued)**

At  $T_A = 25^\circ\text{C}$ , unless otherwise noted. **Supply:** AVDD\_1P8 = 1.8 V, AVDD\_1P9 = 1.9 V, AVDD\_3P15 = 3.15 V, and DVDD\_1P2 = 1.2 V, DVDD\_1P8 = 1.8 V. **Input to the device:** input signal is ac-coupled to INP with a 10-nF capacitor and is applied with source resistance  $R_S = 50\ \Omega$  at frequency  $f_{IN} = 5\ \text{MHz}$ , and a 50-MHz differential clock is applied on ADC\_CLK. **Device settings:** gain code = 319 (total gain = 45 dB), 14-bit ADC resolution, LVDS interface to capture ADC data, and output amplitude  $V_{OUT} = -1\ \text{dBFS}$ . Minimum and maximum values are specified across the full temperature range.

PARAMETER		TEST CONDITION		MIN	TYP	MAX	UNIT	
<b>GENERAL (continued)</b>								
HPF <sub>TGC</sub>	LNA High-pass filter	-1-dB cutoff frequency across LNA_HP_FPROG register settings; see <a href="#">register 199</a>				75	kHz	
						150		
						300		
						600		
<b>ADC SPECIFICATIONS</b>								
$f_S$	Sample rate	14-bit resolution		5		65	MSPS	
		12-bit resolution		5		80		
SNR	Signal-to-noise ratio	14-bit resolution	Without a signal			75	dBFS	
			With a -1-dBFS signal amplitude			72.5		
		12-bit resolution	Without a signal			72		
			With a -1-dBFS signal amplitude			69.5		
$V_{MAX,ADC}$	ADC input full-scale range					2	$V_{PP}$	
<b>POWER DISSIPATION</b>								
$P_{TGC/Ch}$	Power dissipation per channel: 12-bit ADC resolution and 80-MSPS ADC clock	TGC low-noise mode, 500-mV <sub>PP</sub> input signal up to 1% duty cycle applied to 16 channels				94	mW/Ch	
		TGC medium-power mode, 500-mV <sub>PP</sub> input signal up to 1% duty cycle applied to 16 channels				72		
		TGC low-power mode, 500-mV <sub>PP</sub> input signal up to 1% duty cycle applied to 16 channels				62		
$I_{A\_1P9}$	AVDD_1P9 current (1.9 V) <sup>(4)</sup>	TGC low-noise mode, 500-mV <sub>PP</sub> input signal up to 1% duty cycle applied to 16 channels				430	mA	
		TGC medium-power mode, 500-mV <sub>PP</sub> input signal up to 1% duty cycle applied to 16 channels				240		
		TGC low-power mode, 500-mV <sub>PP</sub> input signal up to 1% duty cycle applied to 16 channels				160		
$I_{A\_3P15}$	AVDD_3P15 current <sup>(4)</sup>	TGC low-noise, medium-power, and low-power modes, 500-mV <sub>PP</sub> input signal up to 1% duty cycle applied to 16 channels				20	mA	
$I_{A\_1P8}$	AVDD_1P8 current <sup>(4)</sup>	For a 12-bit ADC resolution and an 80-MSPS system clock				170	mA	
$I_{D\_1P2}$	DVDD_1P2 current <sup>(4)</sup>	For a 12-bit ADC resolution and an 80-MSPS system clock				110	mA	
$I_{A\_1P8}$	DVDD_1P8 current <sup>(4)</sup>	For a 12-bit ADC resolution and an 80-MSPS system clock				100	mA	
<b>AC PERFORMANCE (Power)</b>								
PSRR <sub>1 kHz</sub>	AC power-supply rejection ratio: tone at output relative to tone on supply	100 mV <sub>PP</sub> , 1-kHz tone on supply		AVDD_1P9			-65	dBc
				AVDD_3P15			-90	
				AVDD_1P8, DVDD_1P8, and DVDD_1P2			-70	
PSMR <sub>1 kHz</sub>	AC power-supply modulation ratio: intermodulation tone at output resulting from tones at supply and input measured relative to input tone	100 mV <sub>PP</sub> , 1-kHz tone on supply and -1-dBFS, 5-MHz tone at input		AVDD_1P9			-45	dBc
				AVDD_3P15			-45	
				AVDD_1P8, DVDD_1P8, and DVDD_1P2			-80	
<b>POWER DOWN</b>								
$P_{DOWN}$	Power dissipation in power-down mode	Partial power-down when PDN_FAST = high				17	mW/Ch	
		Complete power-down when PDN_GBL = high				3		
$t_{UP}$	Power-up time	Partial power-down when PDN_FAST = high and the device is in partial power-down time for < 500 $\mu\text{s}$				3	$\mu\text{s}$	
		Complete power-down when PDN_GBL = high				1	ms	

(4) Designing the power supply with 2X of the typical current capacity is recommended to take care of current variation across devices, switching current, signal current, and so forth.

## 8.6 Electrical Characteristics: CW Mode

At  $T_A = 25^\circ\text{C}$ , unless otherwise noted. **Supply:** AVDD\_1P8 = 1.8 V, AVDD\_1P9 = 1.9 V, AVDD\_3P15 = 3.15 V, DVDD\_1P2 = 1.2 V, and DVDD\_1P8 = 1.8 V. **Input to the device:** input signal is ac-coupled to INP with a 10-nF capacitor and is applied with source resistance  $R_S = 50\ \Omega$  at frequency  $f_{IN} = 2\ \text{MHz}$ , CW\_CLK1X = 2-MHz differential clock, and CW\_CLK\_NX = 32-MHz differential clock. **Device settings:** CW clock mode = 16X, and 1X and 16X clock buffer in differential mode and ADC in power-down mode. Minimum and maximum values are specified across the full temperature range.

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
<b>GENERAL</b>							
$V_{MAX, CW}$	Maximum input swing				300		mV <sub>PP</sub>
$R_{V2I}$	Voltage-to-current resistor at LNA output				500		$\Omega$
$I_{OPP}$	Peak-to-peak output current per channel				4.8		mA/Ch
$V_{N, IRCW}$	Input voltage noise	1 channel			1.55		nV/ $\sqrt{\text{Hz}}$
		16 channels			0.45		
$I_{N, ORCW}$	Output current noise	1 channel			19		pA/ $\sqrt{\text{Hz}}$
		16 channels			80		
$NF_{CW}$	Noise figure <sup>(1)</sup>	$R_S = 100\ \Omega$ , 1 channel			4		dB
		$R_S = 100\ \Omega$ , 16 channels			4.8		
$L_{CWM}$	CW mixer conversion loss				4		dB
$PN_{1\ \text{kHz}, CW}$	Phase noise	16X CW clock mode, calculated at 1-kHz frequency	Signal to 1 channel		-151		dBc/Hz
			Signal to 16 channels		-161		
$IMD3$	Two-tone, third-order intermodulation distortion	$f_{IN1} = 5\ \text{MHz}$ , $f_{IN2} = 5.01\ \text{MHz}$ , both tones at -6-dBFS amplitude, input to all the 16 channels.			-60		dBc
		$f_{IN1} = 5\ \text{MHz}$ , $f_{IN2} = 5.01\ \text{MHz}$ , both tones at -6-dBFS amplitude, input to single channel			-70		
$\Delta_{IQG}$	I/Q channel gain matching	16X and 8X CW clock mode			$\pm 0.06$		dB
		4X CW clock mode			$\pm 0.08$		
$\Delta_{IQP}$	I/Q channel phase matching	16X and 8X CW clock mode			$\pm 0.05$		Degrees
		4X CW clock mode			$\pm 0.15$		
$IM_{REJ}$	Image rejection ratio	16X and 8X CW clock mode			-49		dBc
		4X CW clock mode			-46		
$G_{LNACW}$	LNA gain in CW mode				18		dB
$HPF_{CW}$	High-pass filter	-1-dB cutoff frequency across LNA_HPF_PROG register settings; see <a href="#">register 199</a>			75		kHz
					150		
					300		
					600		
<b>POWER DISSIPATION</b>							
$P_{CW/Ch}$	Power dissipation per channel (CW mode)	CW mode, CW_CLK1X = 5 MHz, CW_CLK_NX = 80 MHz		No signal		60	mW/Ch
				300-mV <sub>PP</sub> input signal to all 16 channels		68	
$I_{A\_1P9}$	AVDD_1P9 current (1.9 V) <sup>(2)</sup>	CW mode, CW_CLK1X = 5 MHz, CW_CLK_NX = 80 MHz		No signal		385	mA
				300-mV <sub>PP</sub> input signal to all 16 channels		450	
$I_{A\_3P15}$	AVDD_3P15 current <sup>(2)</sup>	CW mode, CW_CLK1X = 5 MHz, CW_CLK_NX = 80 MHz		No signal		70	mA
				300-mV <sub>PP</sub> input signal to all 16 channels		70	

(1) NF is measured as the SNR at the output of the device relative to the SNR at the input resulting from the noise of source resistance  $R_S$ .

(2) Designing the power supply with 2X of the typical current capacity is recommended to take care of current variation across devices, switching current, signal current, and so forth.



## Electrical Characteristics: CW Mode (continued)

At  $T_A = 25^\circ\text{C}$ , unless otherwise noted. **Supply:** AVDD\_1P8 = 1.8 V, AVDD\_1P9 = 1.9 V, AVDD\_3P15 = 3.15 V, DVDD\_1P2 = 1.2 V, and DVDD\_1P8 = 1.8 V. **Input to the device:** input signal is ac-coupled to INP with a 10-nF capacitor and is applied with source resistance  $R_S = 50\ \Omega$  at frequency  $f_{IN} = 2\ \text{MHz}$ , CW\_CLK1X = 2-MHz differential clock, and CW\_CLK\_NX = 32-MHz differential clock. **Device settings:** CW clock mode = 16X, and 1X and 16X clock buffer in differential mode and ADC in power-down mode. Minimum and maximum values are specified across the full temperature range.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>AC PERFORMANCE (Power)</b>						
PSRR <sub>1 kHz</sub>	AC power-supply rejection ratio: tone at output relative to tone on supply	100 mV <sub>PP</sub> , 1-kHz tone on supply	AVDD_1P9	-60		dBc
			AVDD_3P15	-75		
PSMR <sub>1 kHz</sub>	AC power-supply modulation ratio: intermodulation tone at output resulting from tones at supply and input measured relative to input tone	100 mV <sub>PP</sub> , 1-kHz tone on supply and -1-dBFS, 5-MHz tone at input	AVDD_1P9	-50		dBc
			AVDD_3P15	-50		

## 8.7 Digital Characteristics

The dc specifications refer to the condition where the digital outputs are not switching, but are permanently at a valid logic level 0 or 1. Typical values are at  $T_A = 25^\circ\text{C}$ , minimum and maximum values are across the full temperature range of  $T_{MIN} = -40^\circ\text{C}$  to  $T_{MAX} = 85^\circ\text{C}$ , AVDD\_1P8 = 1.8 V, AVDD\_1P9 = 1.9 V, AVDD\_3P15 = 3.15 V, DVDD\_1P2 = 1.2 V, DVDD\_1P8 = 1.8 V, external differential load resistance between the LVDS output pair, and  $R_{LOAD} = 100\ \Omega$ , unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>DIGITAL INPUTS</b> (PDN_FAST, PDN_GBL, RESET, SCLK, SDIN, SEN, TGC_PROF<1>, TGC_PROF<2>, TGC_SLOPE, TGC_UP_DN, TR_EN<1>, TR_EN<2>, TR_EN<3>, TR_EN<4>, TX_TRIG) <sup>(1)</sup>						
V <sub>IH</sub>	High-level input voltage		0.75 × max [AVDD_1P9, DVDD_1P8]			V
V <sub>IL</sub>	Low-level input voltage		0.25 × min [AVDD_1P9, DVDD_1P8]			V
I <sub>IH</sub>	High-level input current			150		μA
I <sub>IL</sub>	Low-level input current			150		μA
C <sub>i</sub>	Input capacitance			8		pF
<b>DIGITAL OUTPUTS (SDOUT)<sup>(1)</sup></b>						
V <sub>OH</sub>	High-level output voltage		1.6	1.8 <sup>(2)</sup>		V
V <sub>OL</sub>	Low-level output voltage			0	0.2	V
z <sub>o</sub>	Output impedance			50		Ω
<b>LVDS DIGITAL OUTPUTS (DOUT)<sup>(1)</sup></b>						
V <sub>OD</sub>	Output differential voltage	100-Ω external load connected differentially across DOUT	320	400	480	mV
V <sub>OS</sub>	Output offset voltage (common-mode voltage of DOUT <sub>P</sub> and DOUT <sub>M</sub> )	100-Ω external load connected differentially across DOUT	0.9	1.03	1.15	V

(1) All digital specifications are characterized across operating temperature range but are not tested at production.

(2) When SDOUT operation is performed in VCA die, typical output voltage of SDOUT is 1.9 V.

## 8.8 Output Interface Timing Requirements

Typical values are at  $T_A = 25^\circ\text{C}$ ,  $AVDD\_1P8 = 1.8\text{ V}$ ,  $AVDD\_1P9 = 1.9\text{ V}$ ,  $AVDD\_3P15 = 3.15\text{ V}$ ,  $DVDD\_1P2 = 1.2\text{ V}$ ,  $DVDD\_1P8 = 1.8\text{ V}$ , differential ADC clock, LVDS load  $C_{LOAD} = 5\text{ pF}$ ,  $R_{LOAD} = 100\ \Omega$ , 14-bit ADC resolution, and sample rate = 65 MSPS, unless otherwise noted. Minimum and maximum values are across the full temperature range of  $T_{MIN} = -40^\circ\text{C}$  to  $T_{MAX} = 85^\circ\text{C}$ .

		MIN	TYP	MAX	UNIT
<b>GENERAL</b>					
$t_{AP}$	Aperture delay <sup>(1)</sup>		1.6		ns
$\delta t_{AP}$	Aperture delay variation from device to device (at same temperature and supply)		$\pm 0.5$		ns
$t_{APJ}$	Aperture jitter with LVPECL clock as input clock		0.5		ps
<b>ADC TIMING</b>					
$C_d$	ADC latency	Default after reset <sup>(1)</sup>	8.5		ADC clocks
		Low-latency mode	4.5		
<b>LVDS TIMING<sup>(2)</sup></b>					
$f_F$	Frame clock frequency <sup>(1)</sup>		$f_{CLKIN}$		MHz
$D_{FRAME}$	Frame clock duty cycle		50%		
$N_{SER}$	Number of bits serialization of each ADC word	12		16	Bits
$f_D$	Output rate of serialized data	1X output data rate mode	$N_{SER} \times f_{CLKIN}$	1000	Mbps
		2X output data rate mode	$2 \times N_{SER} \times f_{CLKIN}$	1000	
$f_B$	Bit clock frequency		$f_D / 2$	500	MHz
$D_{BIT}$	Bit clock duty cycle		50%		
$t_D$	Data bit duration <sup>(1)</sup>	1	$1000 / f_D$		ns
$t_{PDI}$	Clock propagation delay <sup>(1)</sup>		$6 \times t_D + 5$		ns
$\delta t_{PROP}$	Clock propagation delay variation from device to device (at same temperature and supply)		$\pm 2$		ns
$t_{ORF}$	DOUT, DCLK, FCLK rise and fall time, transition time between $-100\text{ mV}$ and $+100\text{ mV}$		0.2		ns
$t_{OSU}$	Minimum serial data, serial clock setup time <sup>(1)</sup>		$t_D / 2 - 0.4$		ns
$t_{OH}$	Minimum serial data, serial clock hold time <sup>(1)</sup>		$t_D / 2 - 0.4$		ns
$t_{DV}$	Minimum data valid window <sup>(3)(1)</sup>		$t_D - 0.65$		ns
<b>TX_TRIG TIMING</b>					
$t_{TX\_TRIG\_DEL}$	Delay between TX_TRIG and TX_TRIGD <sup>(4)</sup>	0.5		$0.4 \times t_S$ <sup>(5)</sup>	ns
$t_{SU\_TX\_TRIGD}$	Setup time related to latching TX_TRIG relative to the rising edge of the system clock		0.6		ns
$t_{H\_TX\_TRIGD}$	Hold time related to latching TX_TRIG relative to the rising edge of the system clock		0.4		ns

(1) See Figure 1.

(2) All LVDS specifications are characterized but are not tested at production.

(3) The specification for the minimum data valid window is larger than the sum of the minimum setup and hold times because there can be a skew between the ideal transitions of the serial output data with respect to the transition of the bit clock. This skew can vary across channels and across devices. A mechanism to correct this skew can therefore improve the setup and hold timing margins. For example, the LVDS\_DCLK\_DELAY\_PROG control can be used to shift the relative timing of the bit clock with respect to the data.

(4) TX\_TRIGD is the internally delayed version of TX\_TRIG that gets latched on the rising edge of the ADC clock.


(5)  $t_S$  is the ADC clock period in nanoseconds (ns).

### 8.9 Serial Interface Timing Requirements<sup>(1)</sup>

Typical values are at  $T_A = 25^\circ\text{C}$ ,  $AVDD_{1P8} = 1.8\text{ V}$ ,  $AVDD_{1P9} = 1.9\text{ V}$ ,  $AVDD_{3P15} = 3.15\text{ V}$ ,  $DVDD_{1P2} = 1.2\text{ V}$ , and  $DVDD_{1P8} = 1.8\text{ V}$ , unless otherwise noted. Minimum and maximum values are across the full temperature range of  $T_{MIN} = -40^\circ\text{C}$  to  $T_{MAX} = 85^\circ\text{C}$ .

		MIN	TYP	MAX	UNIT
$t_{SCLK}^{(2)}$	SCLK period	50			ns
$t_{SCLK\_H}^{(2)}$	SCLK high time	20			ns
$t_{SCLK\_L}^{(2)}$	SCLK low time	20			ns
$t_{DSU}^{(2)}$	Data setup time	5			ns
$t_{DH}^{(2)}$	Data hold time	5			ns
$t_{SEN\_SU}^{(2)}$	SEN falling edge to SCLK rising edge	8			ns
$t_{SEN\_HO}^{(2)}$	Time between last SCLK rising edge to SEN rising edge	8			ns
$t_{OUT\_DV}^{(3)}$	SDOOUT delay	12	20	28	ns







- (1) All serial interface timing specifications are characterized but are not tested at production.
- (2) See [Figure 100](#) for more details.
- (3) See [Figure 101](#) for more details.

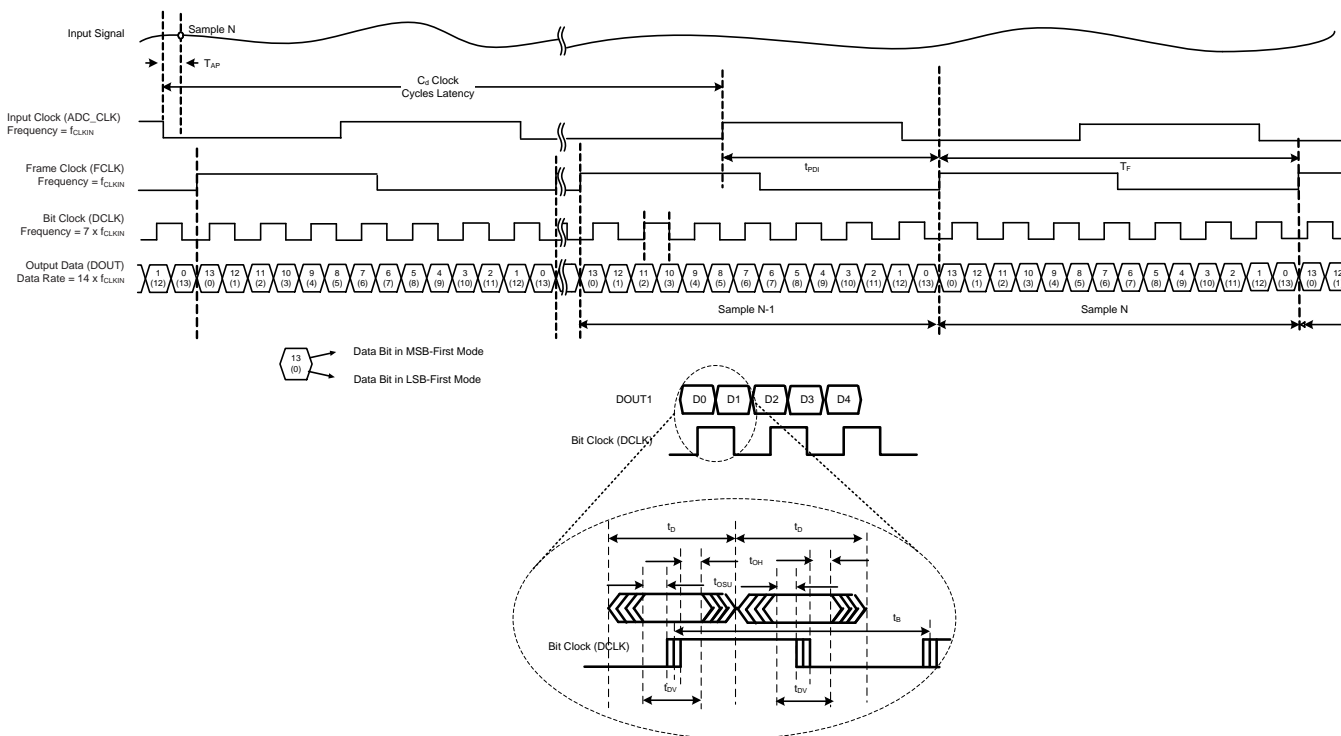

**Figure 1. LVDS Output Timing Specification**







### 8.10 Typical Characteristics: TGC Mode

At  $T_A = 25^\circ\text{C}$ , unless otherwise noted. **Supply:** AVDD\_1P8 = 1.8 V, AVDD\_1P9 = 1.9 V, AVDD\_3P15 = 3.15 V, DVDD\_1P2 = 1.2 V, and DVDD\_1P8 = 1.8 V. **Input to the device:** input signal is ac-coupled to INP with a 10-nF capacitor and is applied with source resistance  $R_S = 50 \Omega$  at frequency  $f_{IN} = 5 \text{ MHz}$ , and a 50-MHz differential clock is applied on ADC\_CLK. **Device settings:** gain code = 319 (total gain = 45 dB), LPF filter cutoff frequency = 15 MHz, low-noise mode, 14-bit ADC resolution, LVDS interface to capture ADC data, output amplitude  $V_{OUT} = -1 \text{ dBFS}$ , and SNR is measured from 750 kHz to Nyquist bandwidth. Minimum and maximum values are specified across the full temperature range.

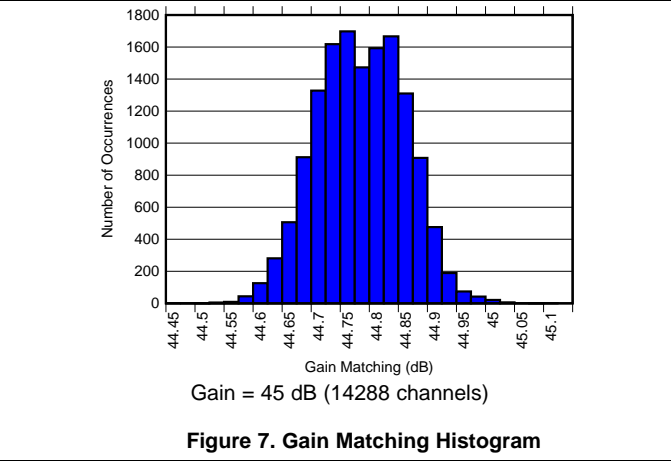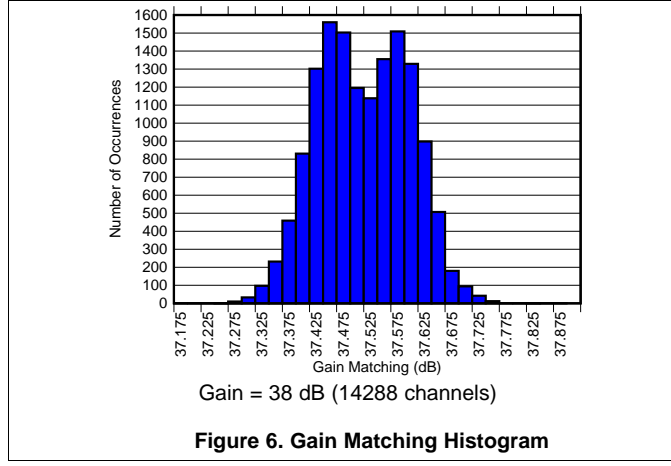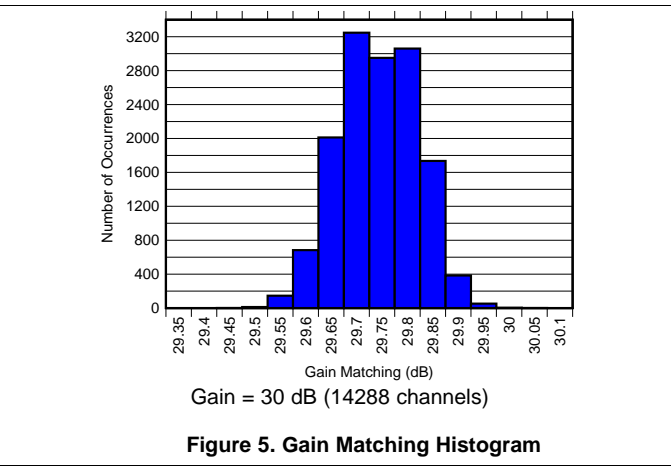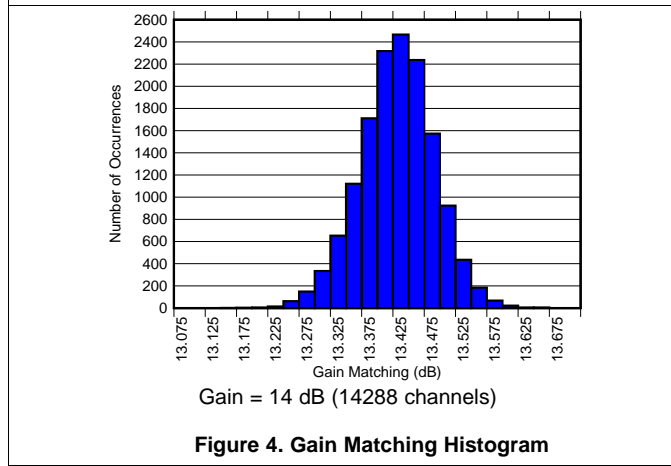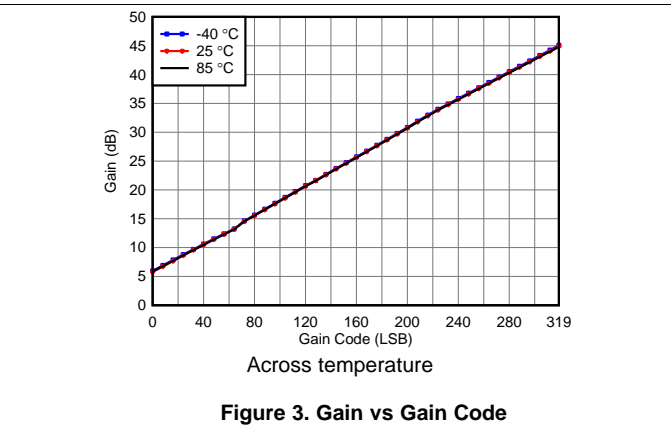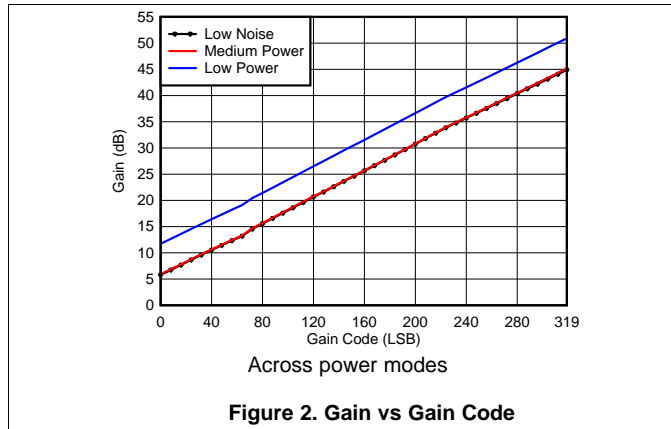

**Typical Characteristics: TGC Mode (continued)**

At  $T_A = 25^\circ\text{C}$ , unless otherwise noted. **Supply:** AVDD\_1P8 = 1.8 V, AVDD\_1P9 = 1.9 V, AVDD\_3P15 = 3.15 V, DVDD\_1P2 = 1.2 V, and DVDD\_1P8 = 1.8 V. **Input to the device:** input signal is ac-coupled to INP with a 10-nF capacitor and is applied with source resistance  $R_S = 50 \Omega$  at frequency  $f_{IN} = 5 \text{ MHz}$ , and a 50-MHz differential clock is applied on ADC\_CLK. **Device settings:** gain code = 319 (total gain = 45 dB), LPF filter cutoff frequency = 15 MHz, low-noise mode, 14-bit ADC resolution, LVDS interface to capture ADC data, output amplitude  $V_{OUT} = -1 \text{ dBFS}$ , and SNR is measured from 750 kHz to Nyquist bandwidth. Minimum and maximum values are specified across the full temperature range.

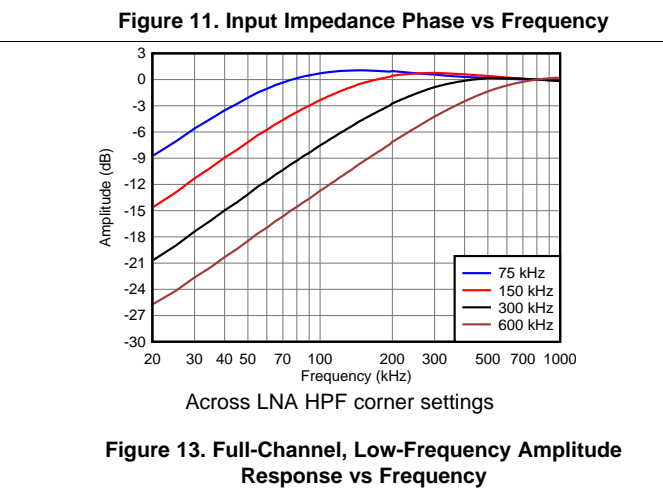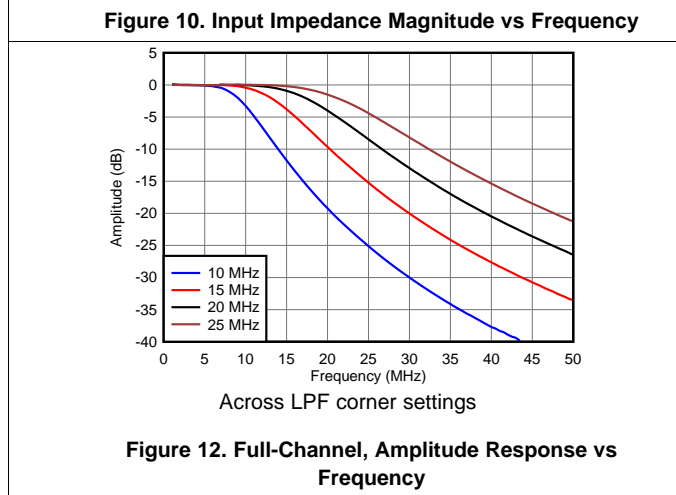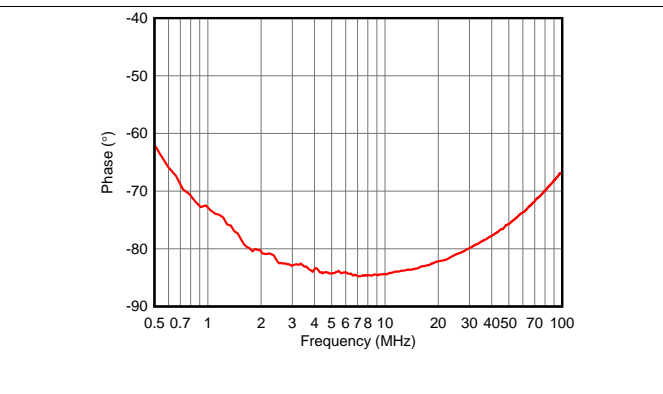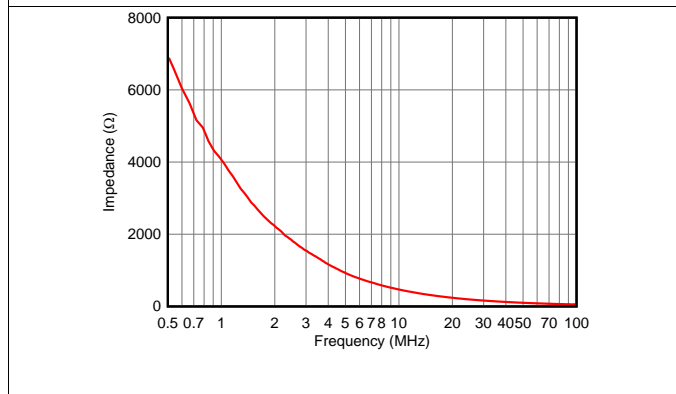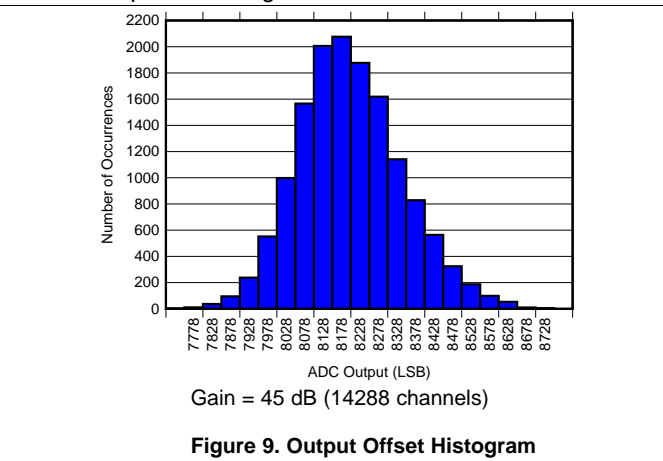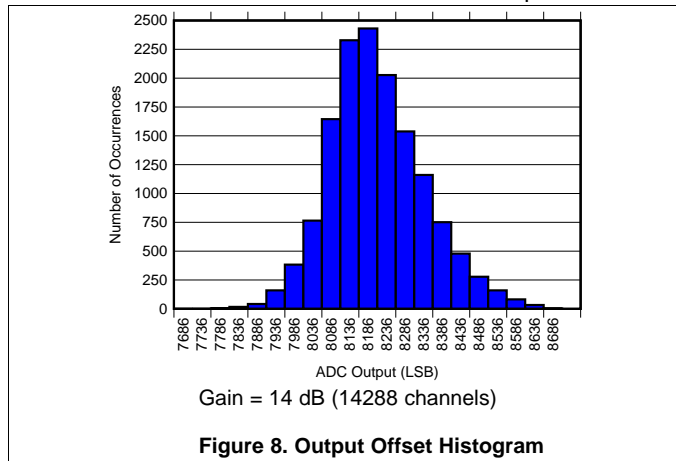

### Typical Characteristics: TGC Mode (continued)

At  $T_A = 25^\circ\text{C}$ , unless otherwise noted. **Supply:** AVDD\_1P8 = 1.8 V, AVDD\_1P9 = 1.9 V, AVDD\_3P15 = 3.15 V, DVDD\_1P2 = 1.2 V, and DVDD\_1P8 = 1.8 V. **Input to the device:** input signal is ac-coupled to INP with a 10-nF capacitor and is applied with source resistance  $R_S = 50 \Omega$  at frequency  $f_{IN} = 5 \text{ MHz}$ , and a 50-MHz differential clock is applied on ADC\_CLK. **Device settings:** gain code = 319 (total gain = 45 dB), LPF filter cutoff frequency = 15 MHz, low-noise mode, 14-bit ADC resolution, LVDS interface to capture ADC data, output amplitude  $V_{OUT} = -1 \text{ dBFS}$ , and SNR is measured from 750 kHz to Nyquist bandwidth. Minimum and maximum values are specified across the full temperature range.

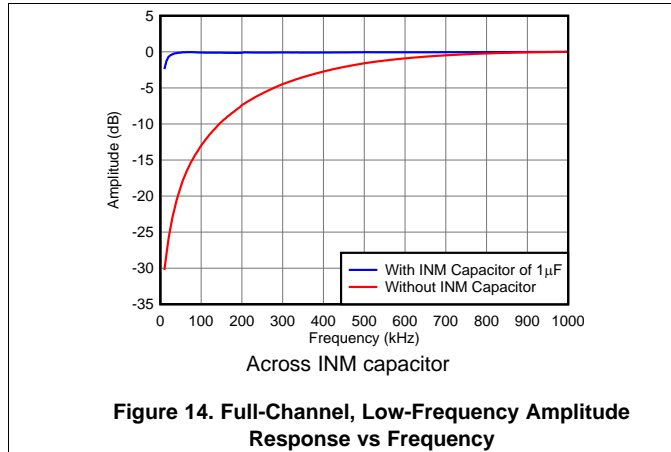


Figure 14. Full-Channel, Low-Frequency Amplitude Response vs Frequency

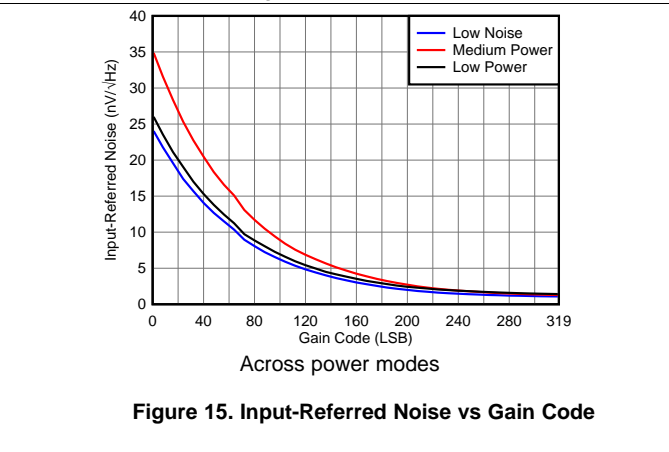


Figure 15. Input-Referred Noise vs Gain Code

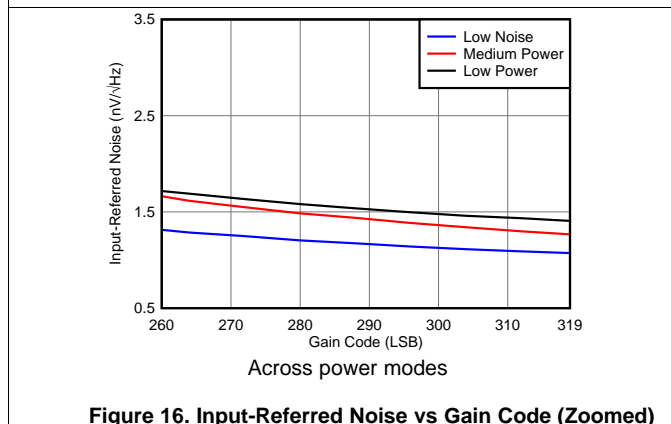


Figure 16. Input-Referred Noise vs Gain Code (Zoomed)

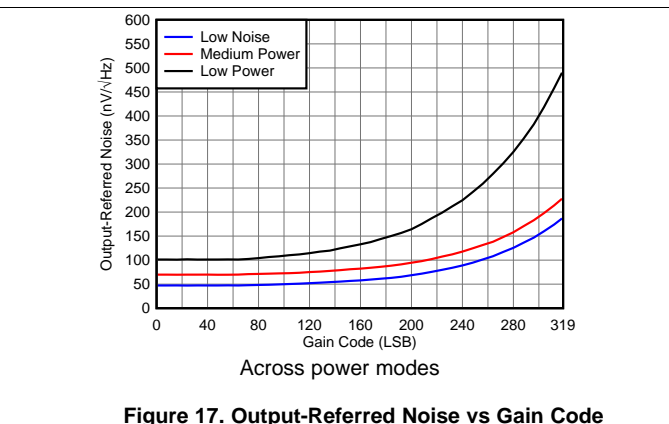


Figure 17. Output-Referred Noise vs Gain Code

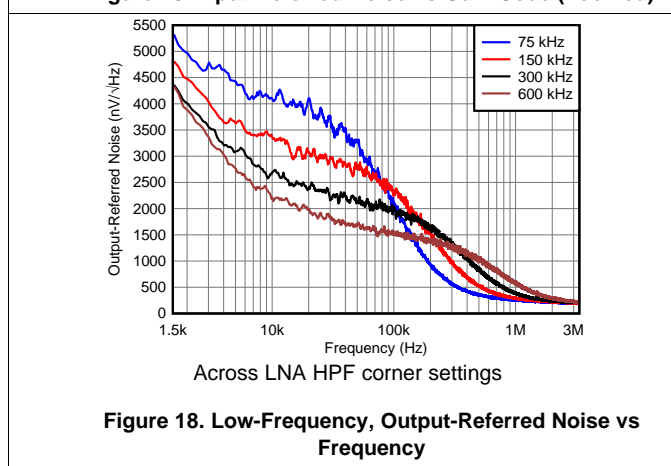


Figure 18. Low-Frequency, Output-Referred Noise vs Frequency

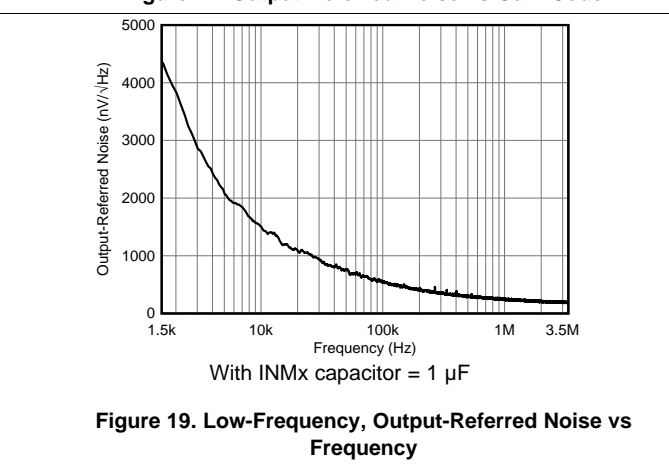


Figure 19. Low-Frequency, Output-Referred Noise vs Frequency

Typical Characteristics: TGC Mode (continued)

At  $T_A = 25^\circ\text{C}$ , unless otherwise noted. **Supply:** AVDD\_1P8 = 1.8 V, AVDD\_1P9 = 1.9 V, AVDD\_3P15 = 3.15 V, DVDD\_1P2 = 1.2 V, and DVDD\_1P8 = 1.8 V. **Input to the device:** input signal is ac-coupled to INP with a 10-nF capacitor and is applied with source resistance  $R_S = 50 \Omega$  at frequency  $f_{IN} = 5 \text{ MHz}$ , and a 50-MHz differential clock is applied on ADC\_CLK. **Device settings:** gain code = 319 (total gain = 45 dB), LPF filter cutoff frequency = 15 MHz, low-noise mode, 14-bit ADC resolution, LVDS interface to capture ADC data, output amplitude  $V_{OUT} = -1 \text{ dBFS}$ , and SNR is measured from 750 kHz to Nyquist bandwidth. Minimum and maximum values are specified across the full temperature range.

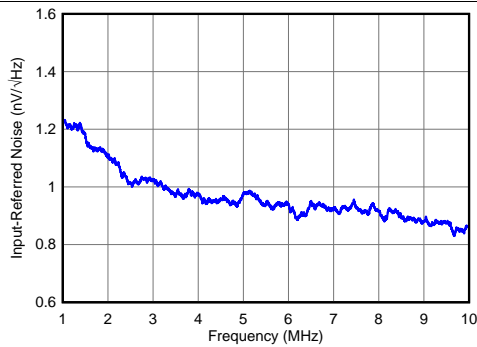


Figure 20. Input-Referred Noise vs Frequency

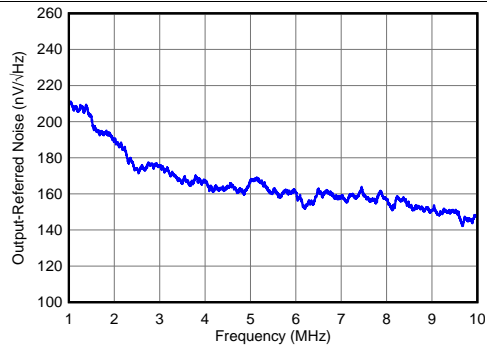


Figure 21. Output-Referred Noise vs Frequency

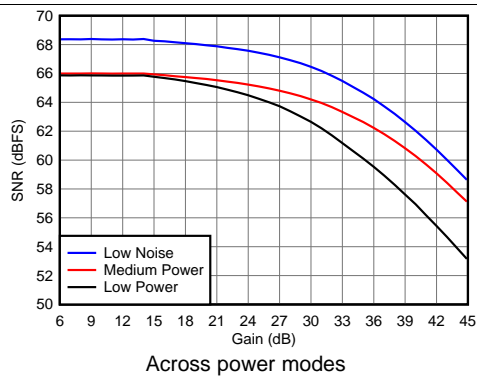


Figure 22. Signal-to-Noise Ratio vs Gain

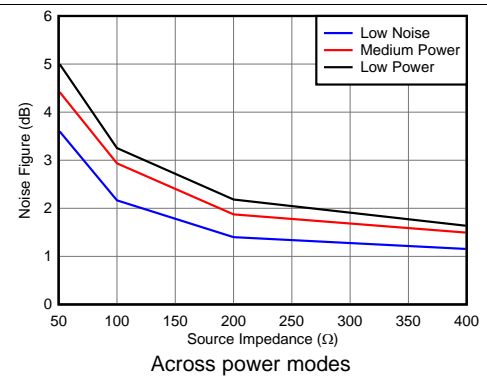


Figure 23. Noise Figure vs Source Impedance

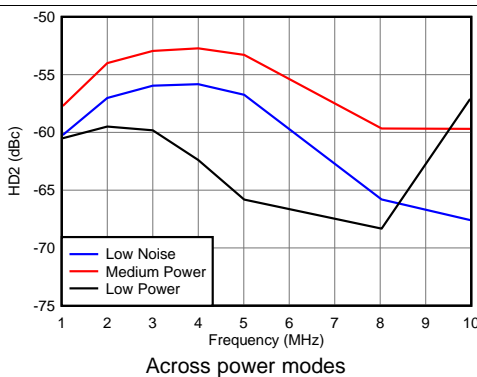


Figure 24. Second-Order Harmonic Distortion vs Frequency


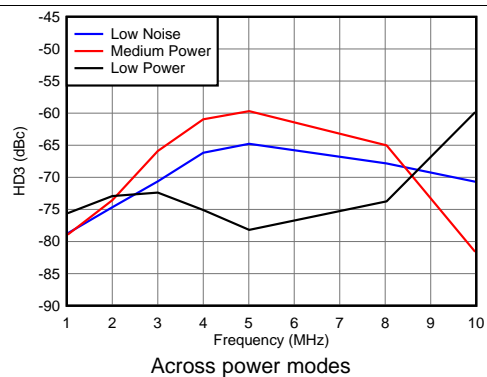



Figure 25. Third-Order Harmonic Distortion vs Frequency

**Typical Characteristics: TGC Mode (continued)**


At  $T_A = 25^\circ\text{C}$ , unless otherwise noted. **Supply:** AVDD\_1P8 = 1.8 V, AVDD\_1P9 = 1.9 V, AVDD\_3P15 = 3.15 V, DVDD\_1P2 = 1.2 V, and DVDD\_1P8 = 1.8 V. **Input to the device:** input signal is ac-coupled to INP with a 10-nF capacitor and is applied with source resistance  $R_S = 50 \Omega$  at frequency  $f_{IN} = 5 \text{ MHz}$ , and a 50-MHz differential clock is applied on ADC\_CLK. **Device settings:** gain code = 319 (total gain = 45 dB), LPF filter cutoff frequency = 15 MHz, low-noise mode, 14-bit ADC resolution, LVDS interface to capture ADC data, output amplitude  $V_{OUT} = -1 \text{ dBFS}$ , and SNR is measured from 750 kHz to Nyquist bandwidth. Minimum and maximum values are specified across the full temperature range.

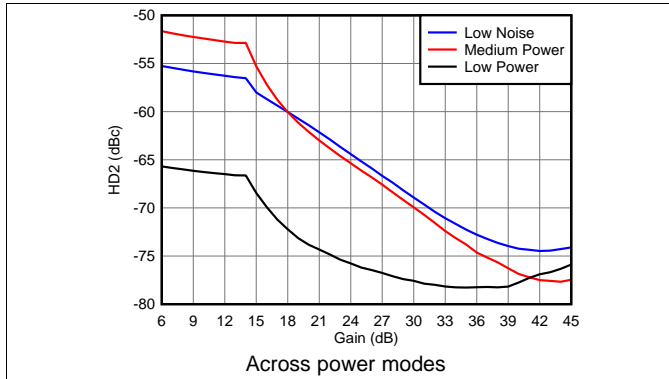


**Figure 26. Second-Order Harmonic Distortion vs Gain**

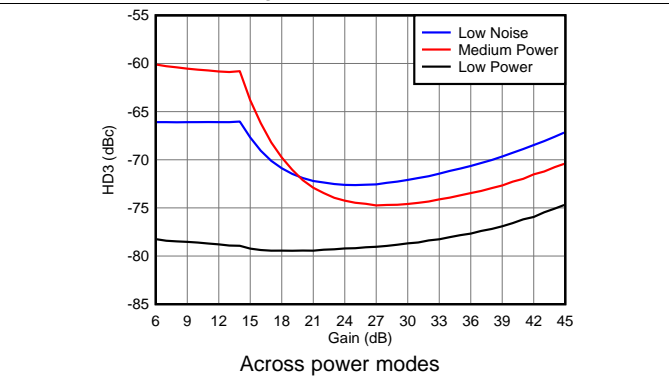


**Figure 27. Third-Order Harmonic Distortion vs Gain**

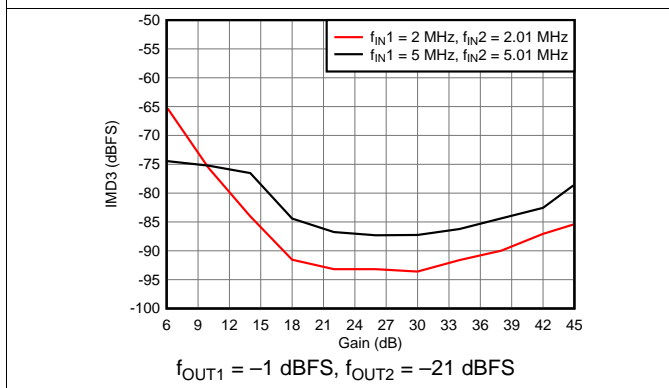


**Figure 28. IMD3 vs Gain**

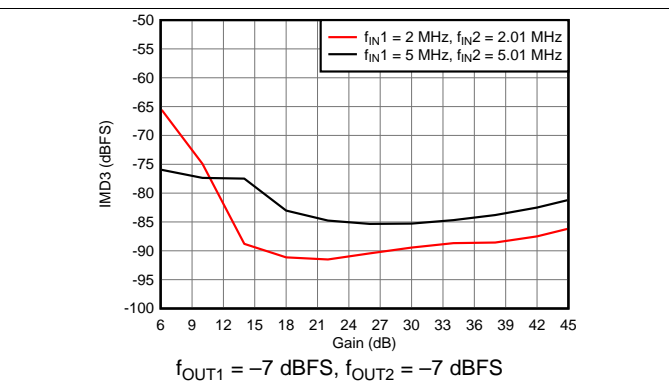

**Figure 29. IMD3 vs Gain**

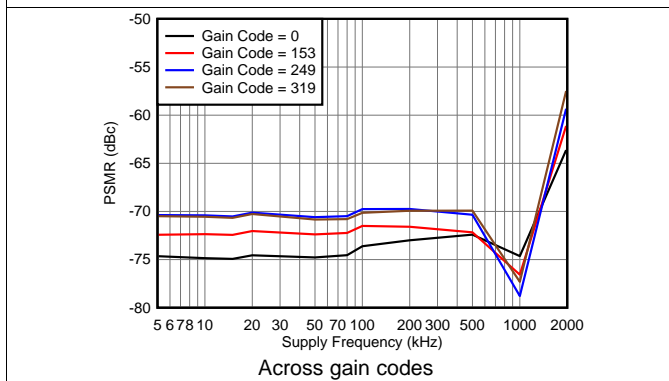

**Figure 30. AVDD\_1P9 Power-Supply Modulation Ratio vs 100-mV<sub>PP</sub> Supply Noise Frequencies**

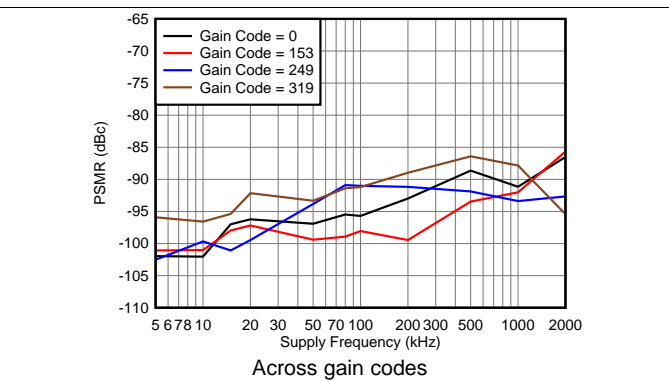

**Figure 31. AVDD\_3P15 Power-Supply Modulation Ratio vs 100-mV<sub>PP</sub> Supply Noise Frequencies**



Typical Characteristics: TGC Mode (continued)

At  $T_A = 25^\circ\text{C}$ , unless otherwise noted. **Supply:** AVDD\_1P8 = 1.8 V, AVDD\_1P9 = 1.9 V, AVDD\_3P15 = 3.15 V, DVDD\_1P2 = 1.2 V, and DVDD\_1P8 = 1.8 V. **Input to the device:** input signal is ac-coupled to INP with a 10-nF capacitor and is applied with source resistance  $R_S = 50 \Omega$  at frequency  $f_{IN} = 5 \text{ MHz}$ , and a 50-MHz differential clock is applied on ADC\_CLK. **Device settings:** gain code = 319 (total gain = 45 dB), LPF filter cutoff frequency = 15 MHz, low-noise mode, 14-bit ADC resolution, LVDS interface to capture ADC data, output amplitude  $V_{OUT} = -1 \text{ dBFS}$ , and SNR is measured from 750 kHz to Nyquist bandwidth. Minimum and maximum values are specified across the full temperature range.

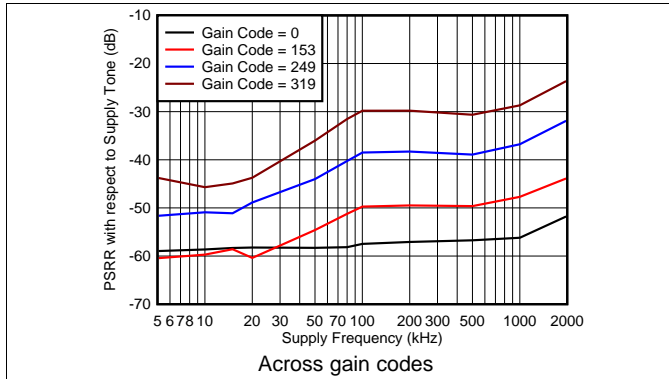


Figure 32. AVDD\_1P9 Power-Supply Rejection Ratio vs 100-mV<sub>pp</sub> Supply Noise Frequencies

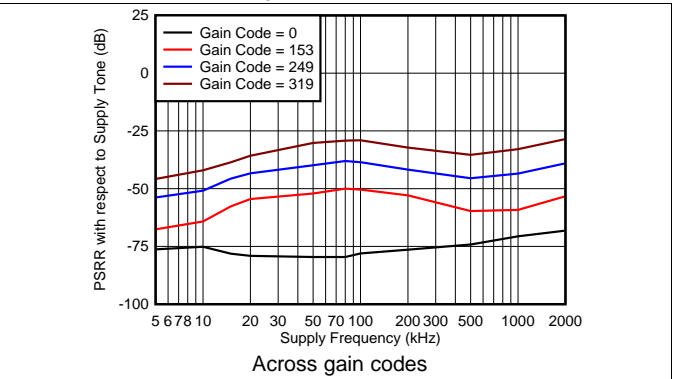


Figure 33. AVDD\_3P15 Power-Supply Rejection Ratio vs 100-mV<sub>pp</sub> Supply Noise Frequencies

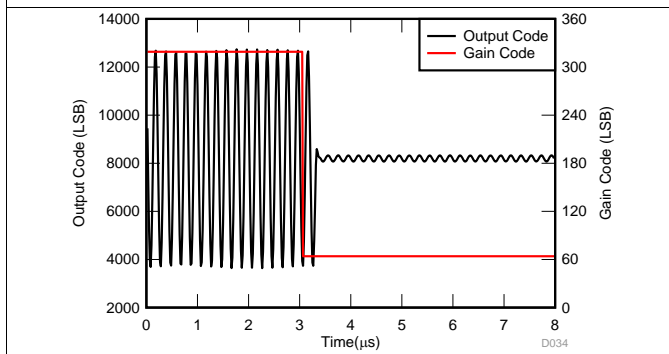


Figure 34. Output and Gain Code Step Response vs Time

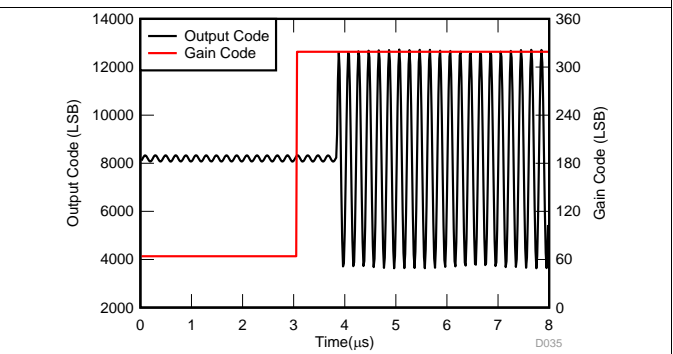


Figure 35. Output and Gain Code Step Response vs Time


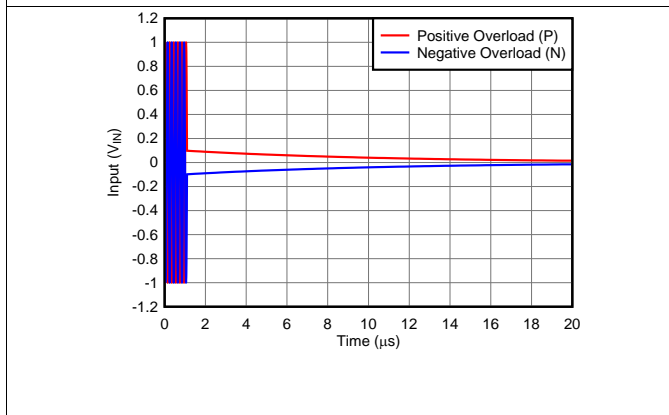


Figure 36. Pulse Inversion Asymmetrical Input vs Time






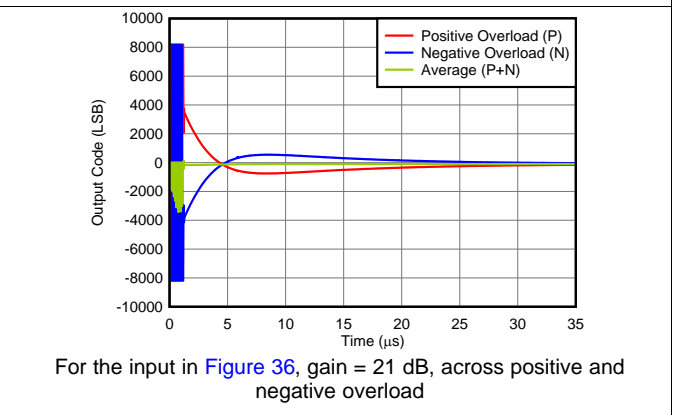


For the input in Figure 36, gain = 21 dB, across positive and negative overload

Figure 37. Device Pulse Inversion Output vs Time

**Typical Characteristics: TGC Mode (continued)**

At  $T_A = 25^\circ\text{C}$ , unless otherwise noted. **Supply:** AVDD\_1P8 = 1.8 V, AVDD\_1P9 = 1.9 V, AVDD\_3P15 = 3.15 V, DVDD\_1P2 = 1.2 V, and DVDD\_1P8 = 1.8 V. **Input to the device:** input signal is ac-coupled to INP with a 10-nF capacitor and is applied with source resistance  $R_S = 50 \Omega$  at frequency  $f_{IN} = 5 \text{ MHz}$ , and a 50-MHz differential clock is applied on ADC\_CLK. **Device settings:** gain code = 319 (total gain = 45 dB), LPF filter cutoff frequency = 15 MHz, low-noise mode, 14-bit ADC resolution, LVDS interface to capture ADC data, output amplitude  $V_{OUT} = -1 \text{ dBFS}$ , and SNR is measured from 750 kHz to Nyquist bandwidth. Minimum and maximum values are specified across the full temperature range.

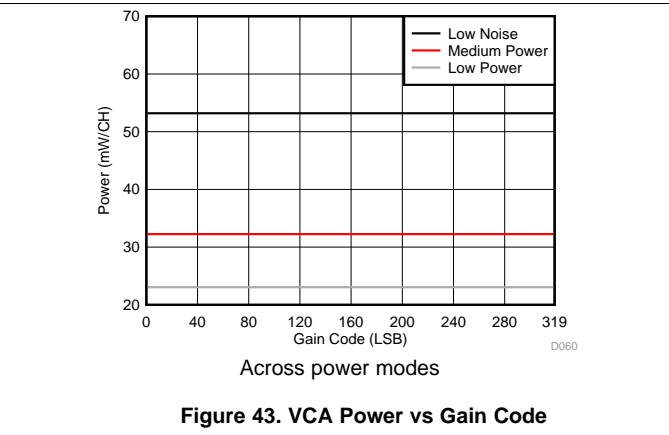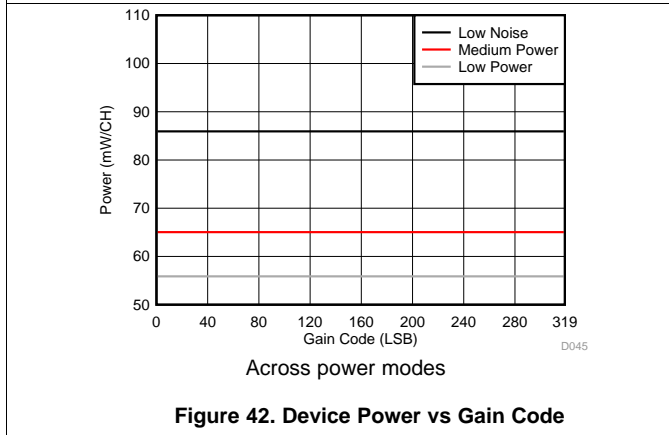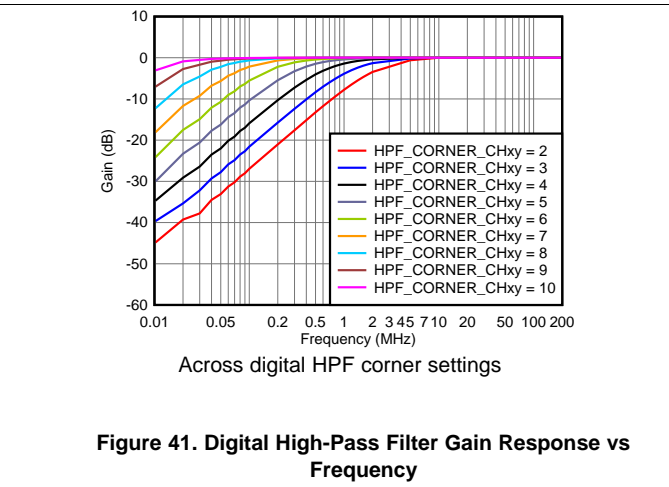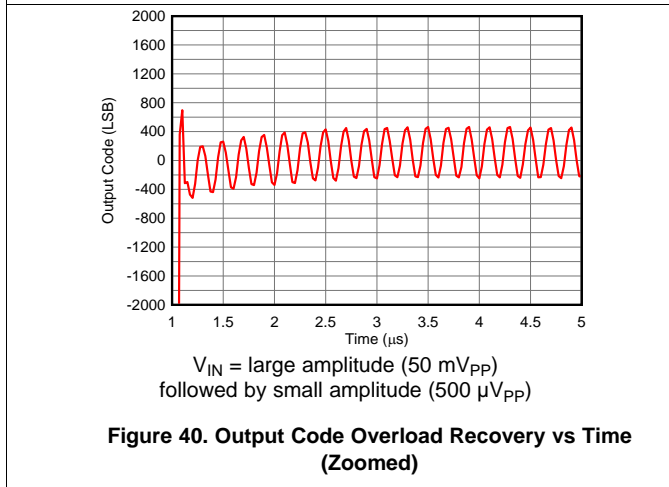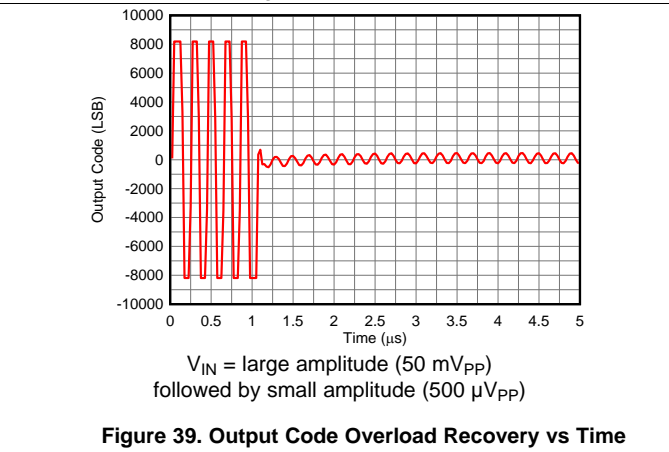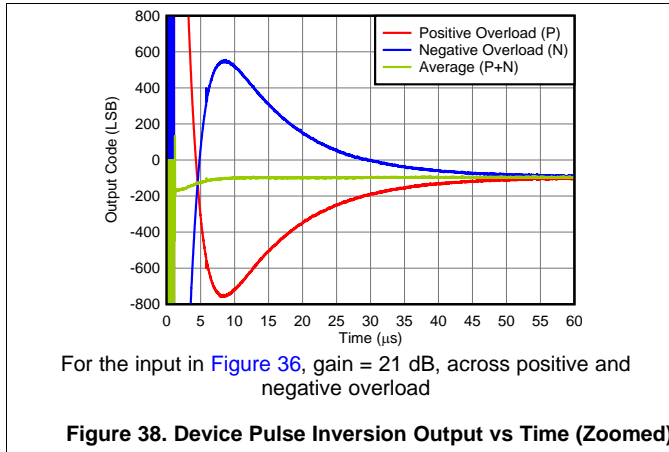

Typical Characteristics: TGC Mode (continued)

At  $T_A = 25^\circ\text{C}$ , unless otherwise noted. **Supply:** AVDD\_1P8 = 1.8 V, AVDD\_1P9 = 1.9 V, AVDD\_3P15 = 3.15 V, DVDD\_1P2 = 1.2 V, and DVDD\_1P8 = 1.8 V. **Input to the device:** input signal is ac-coupled to INP with a 10-nF capacitor and is applied with source resistance  $R_S = 50 \Omega$  at frequency  $f_{IN} = 5 \text{ MHz}$ , and a 50-MHz differential clock is applied on ADC\_CLK. **Device settings:** gain code = 319 (total gain = 45 dB), LPF filter cutoff frequency = 15 MHz, low-noise mode, 14-bit ADC resolution, LVDS interface to capture ADC data, output amplitude  $V_{OUT} = -1 \text{ dBFS}$ , and SNR is measured from 750 kHz to Nyquist bandwidth. Minimum and maximum values are specified across the full temperature range.

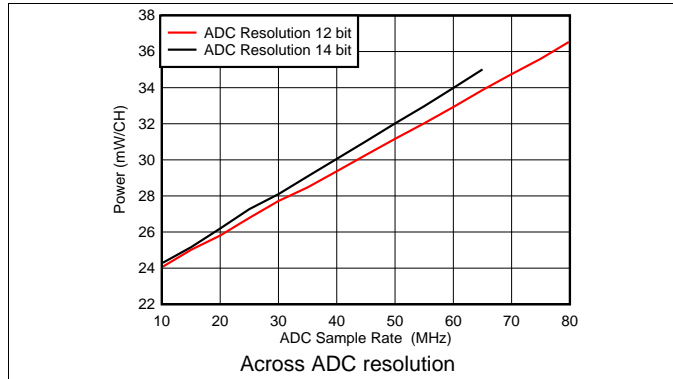


Figure 44. ADC Power vs ADC Sample Rate

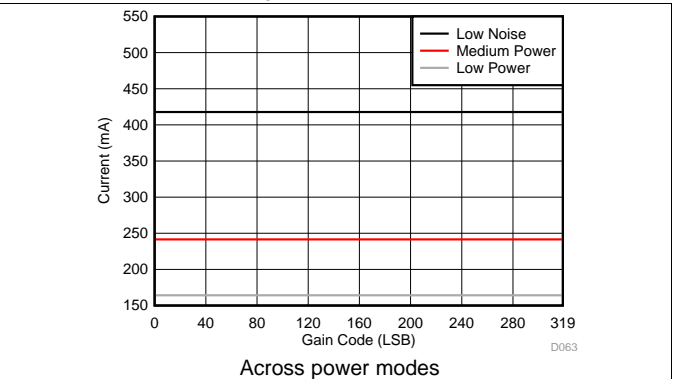


Figure 45. AVDD\_1P9 Supply Current vs Gain Code

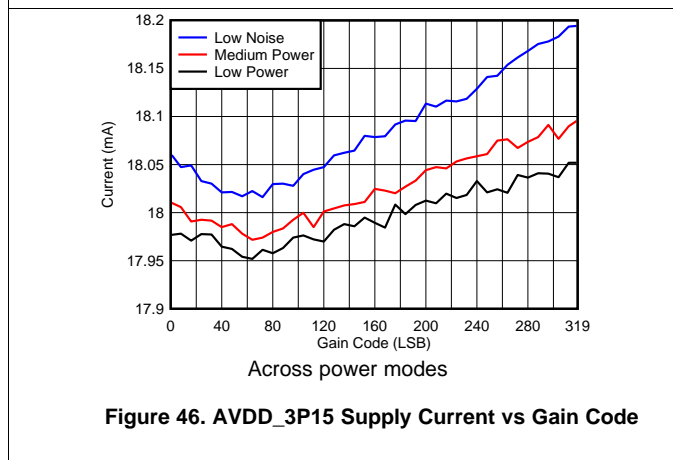


Figure 46. AVDD\_3P15 Supply Current vs Gain Code

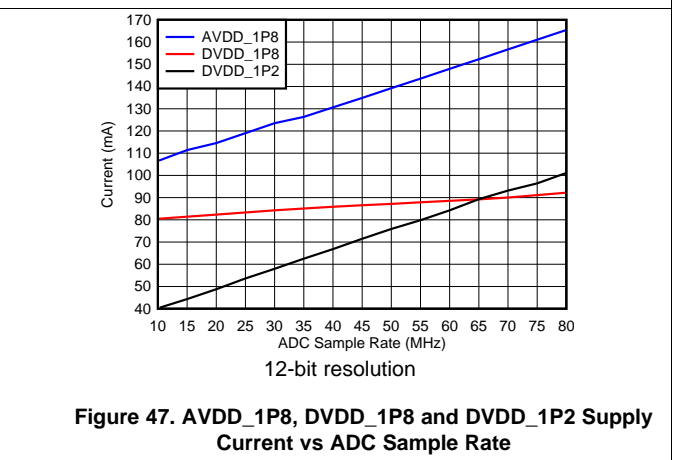


Figure 47. AVDD\_1P8, DVDD\_1P8 and DVDD\_1P2 Supply Current vs ADC Sample Rate

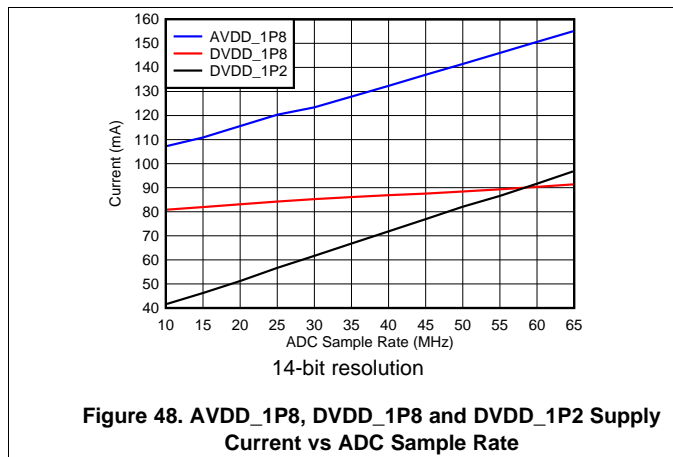


Figure 48. AVDD\_1P8, DVDD\_1P8 and DVDD\_1P2 Supply Current vs ADC Sample Rate


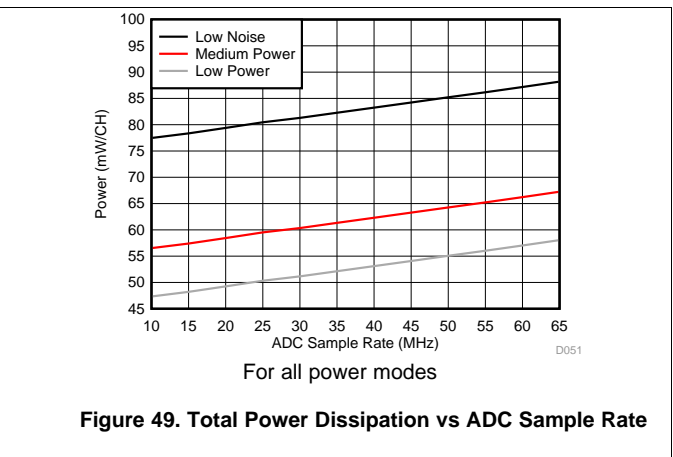



Figure 49. Total Power Dissipation vs ADC Sample Rate

### 8.11 Typical Characteristics: CW Mode


At  $T_A = 25^\circ\text{C}$ , unless otherwise noted. **Supply:** AVDD\_1P8 = 1.8 V, AVDD\_1P9 = 1.9 V, AVDD\_3P15 = 3.15 V, DVDD\_1P2 = 1.2 V, and DVDD\_1P8 = 1.8 V. **Input to the device:** input signal = 2 MHz, CW\_CLK1X = 2-MHz differential, and CW\_CLK\_NX = 32-MHz differential. **Device settings:** CW clock mode = 16X, and 1X and 16X clock buffer in differential mode, and ADC in power-down mode. Minimum and maximum values are specified across the full temperature range.

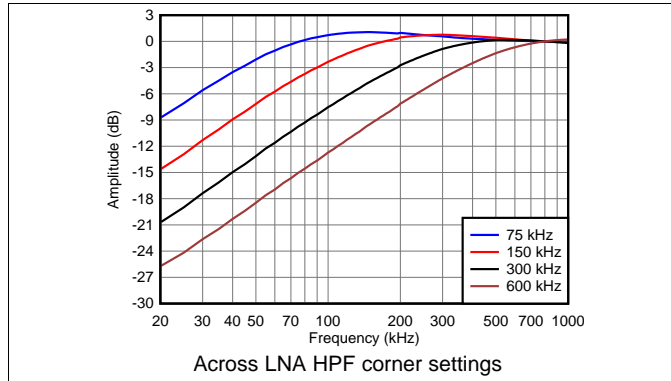


**Figure 50. Full-Channel, Low-Frequency Amplitude Response vs Frequency**

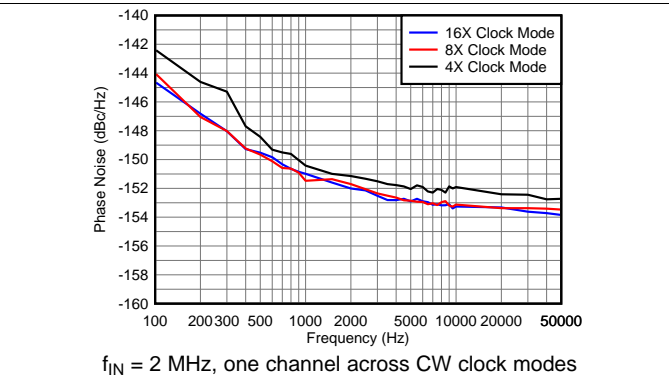


**Figure 51. CW Phase Noise vs Frequency**

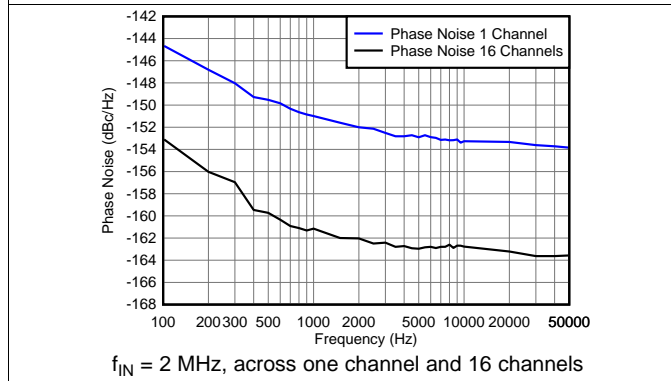


**Figure 52. CW Phase Noise vs Frequency**

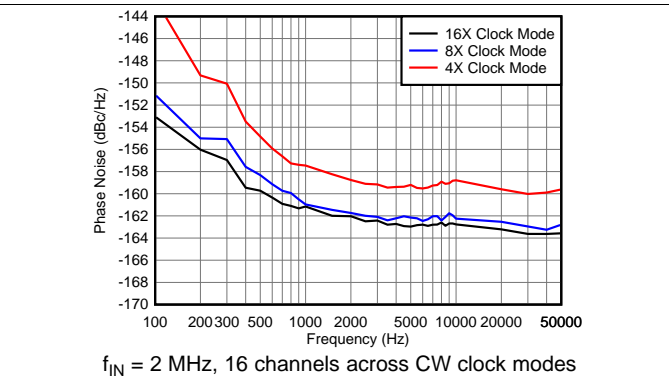

**Figure 53. CW Phase Noise vs Frequency**

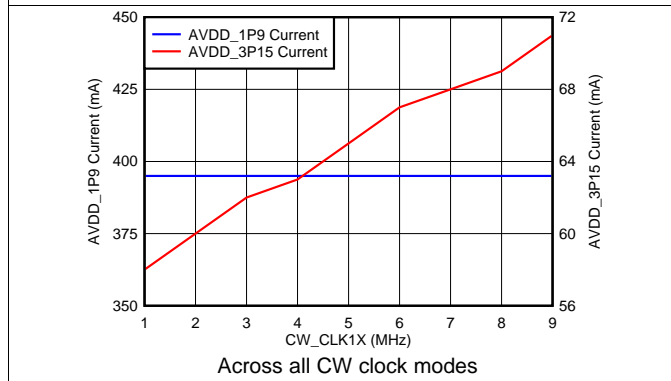

**Figure 54. AVDD\_1P9 and AVDD\_3P15 Supply Current vs CW Clock Frequency**

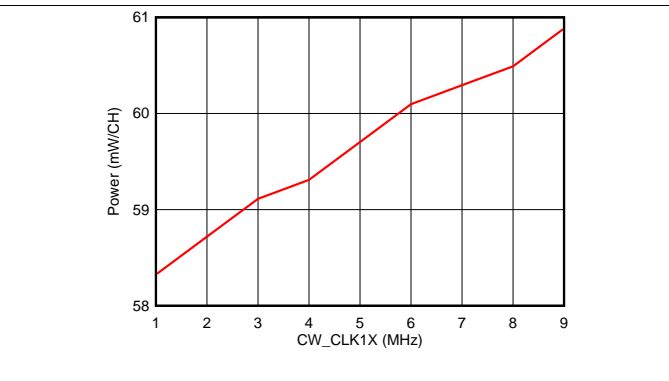


**Figure 55. Power vs CW 1X Clock Frequency**

## 9 Detailed Description

### 9.1 Overview

The AFE5816 is a highly-integrated, analog front-end (AFE) solution specifically designed for ultrasound systems where high performance and higher integration are required. The device integrates a complete time-gain compensation (TGC) imaging path and a continuous-wave Doppler (CWD) path. The device also enables users to select from a variety of power and noise combinations to optimize system performance. The device contains 16 dedicated channels, each comprising an attenuator, low-noise amplifier (LNA), low-pass filter (LPF), and either a 14-bit or 12-bit analog-to-digital converter (ADC). At the output of the 16 ADCs is a low-voltage differential signaling (LVDS) serializer to transfer digital data. In addition, the device also contains a continuous wave (CW) mixer. Multiple features in the device are suitable for ultrasound applications (such as programmable termination, individual channel control, fast power-up and power-down response, fast and consistent overload recovery, and integrated digital processing). Therefore, this device brings premium image quality to ultra-portable, handheld systems all the way up to high-end ultrasound systems. In addition, the signal chain of the device can handle signal frequencies as low as 10 kHz and as high as 25 MHz. This broad analog frequency range enables the device to be used in both sonar and medical applications; see the [Functional Block Diagram](#) section for a simplified function block diagram.

## 9.2 Functional Block Diagram

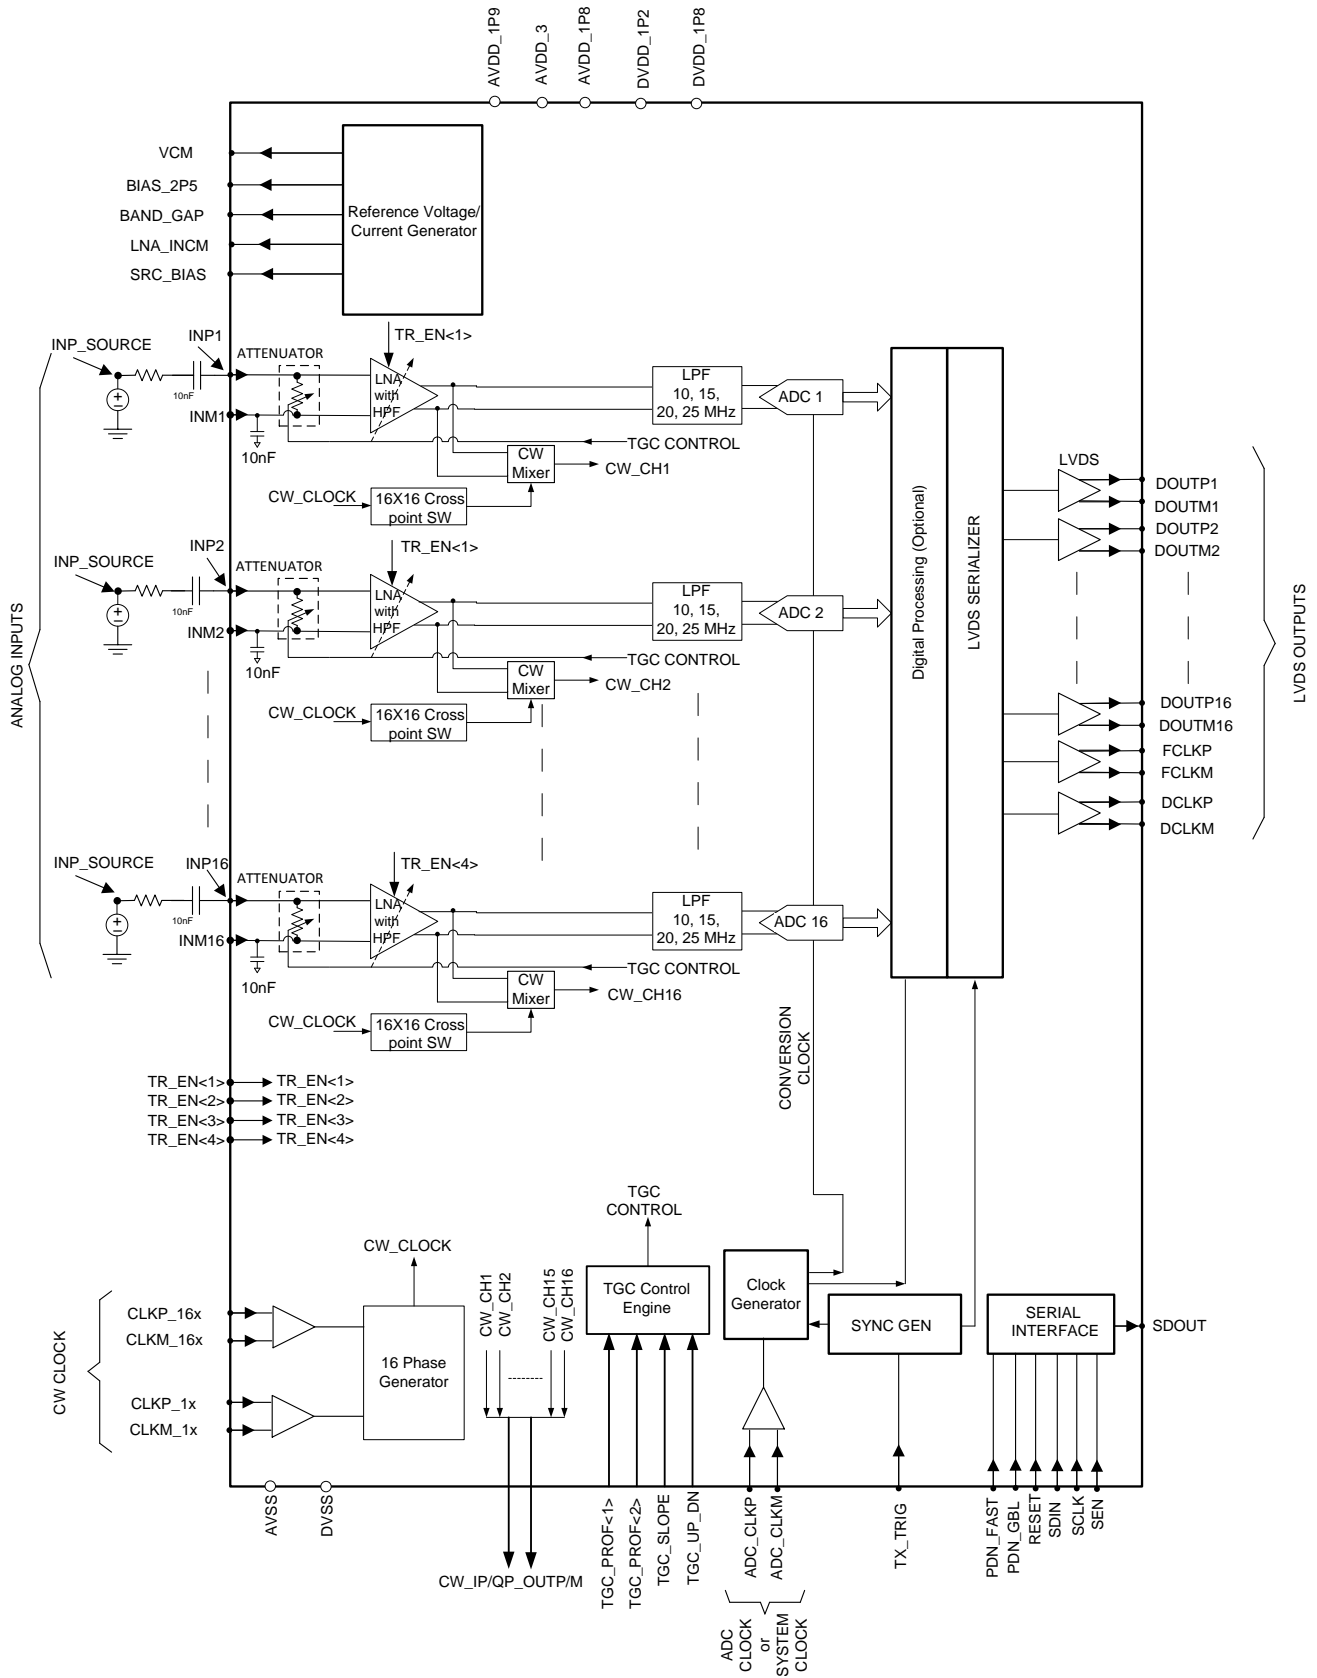

### 9.3 Feature Description

The device supports two signal chains: TGC mode and CW mode. [Table 2](#) describes the functionality of various blocks in CW and TGC mode.

**Table 2. Various Block Functionality in TGC and CW Mode**

BLOCK	TGC MODE		CW MODE	
	ENABLED, DISABLED	COMMENT	ENABLED, DISABLED	COMMENT
Attenuator	Enabled	Attenuator supports attenuation range of 8 dB to 0 dB	Disabled	In CW mode, the attenuator is disabled automatically
Attenuator high-pass filter	Enabled	—	Disabled	—
Low-noise amplifier (LNA)	Enabled	LNA supports gain range of 14 dB to 45 dB	Enabled	LNA supports a fixed gain of 18 dB
LNA high-pass filter	Enabled	—	Enabled	—
Low pass filter (LPF)	Enabled	—	Disabled	In CW mode, the LPF is disabled automatically
Digital TGC (DTGC)	Enabled	—	Disabled	In CW mode, the DTGC is disabled automatically
Analog-to-digital converter (ADC)	Enabled	—	Enabled	In CW mode, the ADC remains active. The ADC can be powered down in CW mode using a power-down pin or power-down register bit.


#### 9.3.1 Attenuator

The first stage of the signal chain is an attenuator followed by a low-noise amplifier (LNA). Fundamentally, an attenuator functions as a time-varying passive termination. In ultrasound imaging systems, near-field reflected signals are of very high amplitude. This high-amplitude signal can be attenuated using an attenuator in order to bring the signal amplitude down to within the LNA input amplitude range. The attenuator supports time-gain compensation [that is, the attenuation level is from –8 dB to 0 dB with time in steps of 0.125 dB (64 steps)]. The attenuation level is controlled by the TGC control engine in the device.

##### 9.3.1.1 Implementation

The attenuator is implemented as a resistor divider network that uses the principle of voltage division between a source resistance ( $R_S$ ) and attenuator resistance ( $R_{ATTEN}$ ); see [Figure 56](#). At the signal frequency, attenuation provided by this resistor network is given by [Equation 1](#):

$$\text{Attenuation} = \frac{V_{INP}}{V_{INP\_SOURCE}} = \frac{R_{ATTEN}}{R_S + R_{ATTEN}} \quad (1)$$

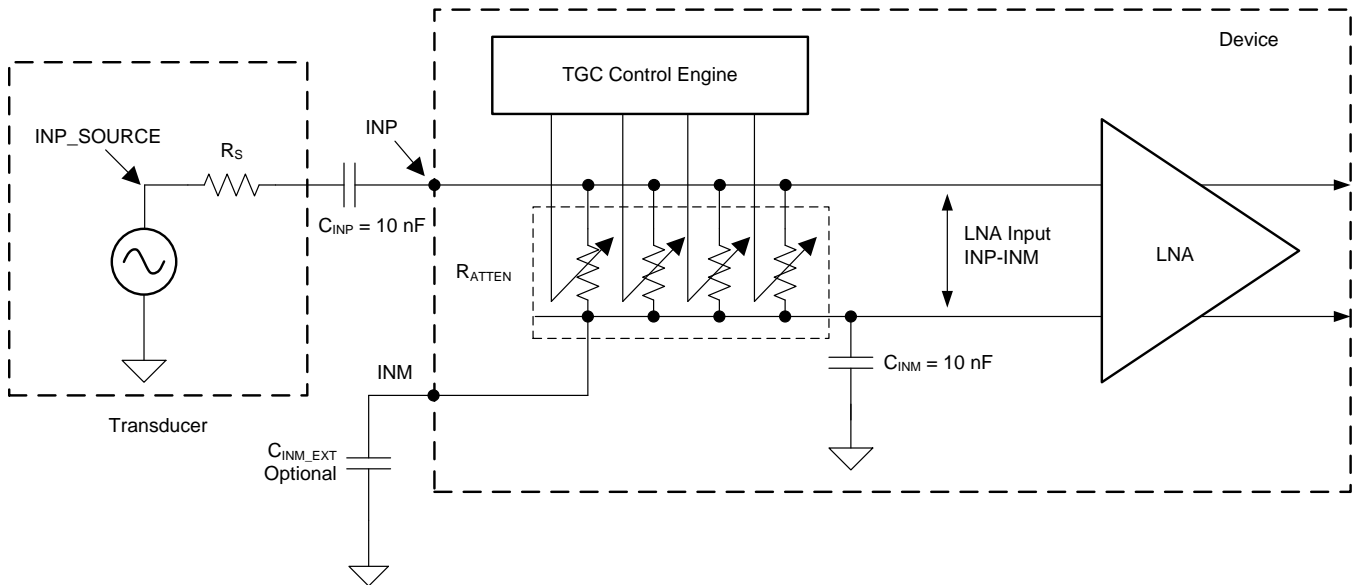
**Figure 56. Attenuator Block Diagram**

In Equation 1, the value of the  $R_{ATTEN}$  resistor is controlled by the TGC control engine. Further details of the TGC control engine are provided in the [Digital TGC \(DTGC\)](#) section. The correct  $R_{ATTEN}$  network must be selected for a given  $R_S$  using the `INP_RES_SEL` register because attenuation is a function of both source resistance ( $R_S$ ) and attenuator resistance ( $R_{ATTEN}$ ). The range of input resistance  $R_S$  supported is listed in [Table 122](#).

#### NOTE

The attenuator block remains active only in TGC mode. The attenuator block is disabled in CW mode.

#### 9.3.1.2 Maximum Signal Amplitude Support

In TGC mode, the maximum input signal amplitude of the low-noise amplifier is approximately 400 mV<sub>PP</sub>. In [Figure 56](#), the source is modeled as a voltage source at the `INP_SOURCE` node in series with its (source) impedance  $R_S$ . The attenuation is achieved by the voltage division between the series combination of the source impedance  $R_S$  and the attenuator resistance a  $R_{ATTEN}$ . Therefore, the maximum signal amplitude supported at the `INP_SOURCE` node is given by 400 mV<sub>PP</sub> divided by the attenuation. For a given value of source resistance  $R_S$ , the attenuator provides the maximum attenuation of 8 dB. Thus, the maximum signal supported at the `INP_SOURCE` node is 1 V<sub>PP</sub>.

#### 9.3.1.3 Attenuator High-Pass Filter (ATTEN HPF)

A high-pass filter can be realized through the attenuator. The frequency response of the high-pass filter is governed by the  $C_{INM}$  (internal to the device),  $C_{INM\_EXT}$  (optional and external to the device), and  $C_{INP}$  (external ac-coupling capacitor) capacitors, and the source resistance  $R_S$  and attenuator resistance  $R_{ATTEN}$ .

For the input circuit shown in [Figure 56](#), the LNA input is given by Equation 2:

$$\frac{V_{INP} - V_{INM}}{V_{INP\_SOURCE}} = \frac{R_{ATTEN}}{R_S + R_{ATTEN}} \times \frac{s \times (R_S + R_{ATTEN}) \times \left( \frac{C_{INP} \times C_{INM\_T}}{C_{INP} + C_{INM\_T}} \right)}{1 + s \times (R_S + R_{ATTEN}) \times \left( \frac{C_{INP} \times C_{INM\_T}}{C_{INP} + C_{INM\_T}} \right)}$$

where

- $C_{INM\_T}$  represents the total capacitor ( $= C_{INM} + C_{INM\_EXT}$ ) at the `INM` node. (2)




Equation 2 describes a high-pass response with a corner frequency given by Equation 3:

$$\left[ \frac{1}{(R_S + R_{ATTEN})} \right] \times \left[ \frac{(C_{INP} + C_{INM\_T})}{(C_{INP} \times C_{INM\_T})} \right] \quad (3)$$

Therefore, when  $R_{ATTEN}$  changes with the TGC, the HPF cutoff frequency also changes.

Figure 57 shows typical values of  $R_{ATTEN}$  across attenuation and INP\_RES\_SEL settings. Figure 58 and Figure 59 show the HPF corner frequency across attenuation and INP\_RES\_SEL settings for  $C_{INP} = C_{INM\_T} = 10 \text{ nF}$  and  $C_{INP} = C_{INM\_T} = 1 \mu\text{F}$ , respectively. For low-frequency application systems (for example, sonar systems that require a very-low, high-pass filter corner), larger value capacitors of  $C_{INP}$  and  $C_{INM\_EXT}$  can be used in order to reduce the HPF corner frequency.

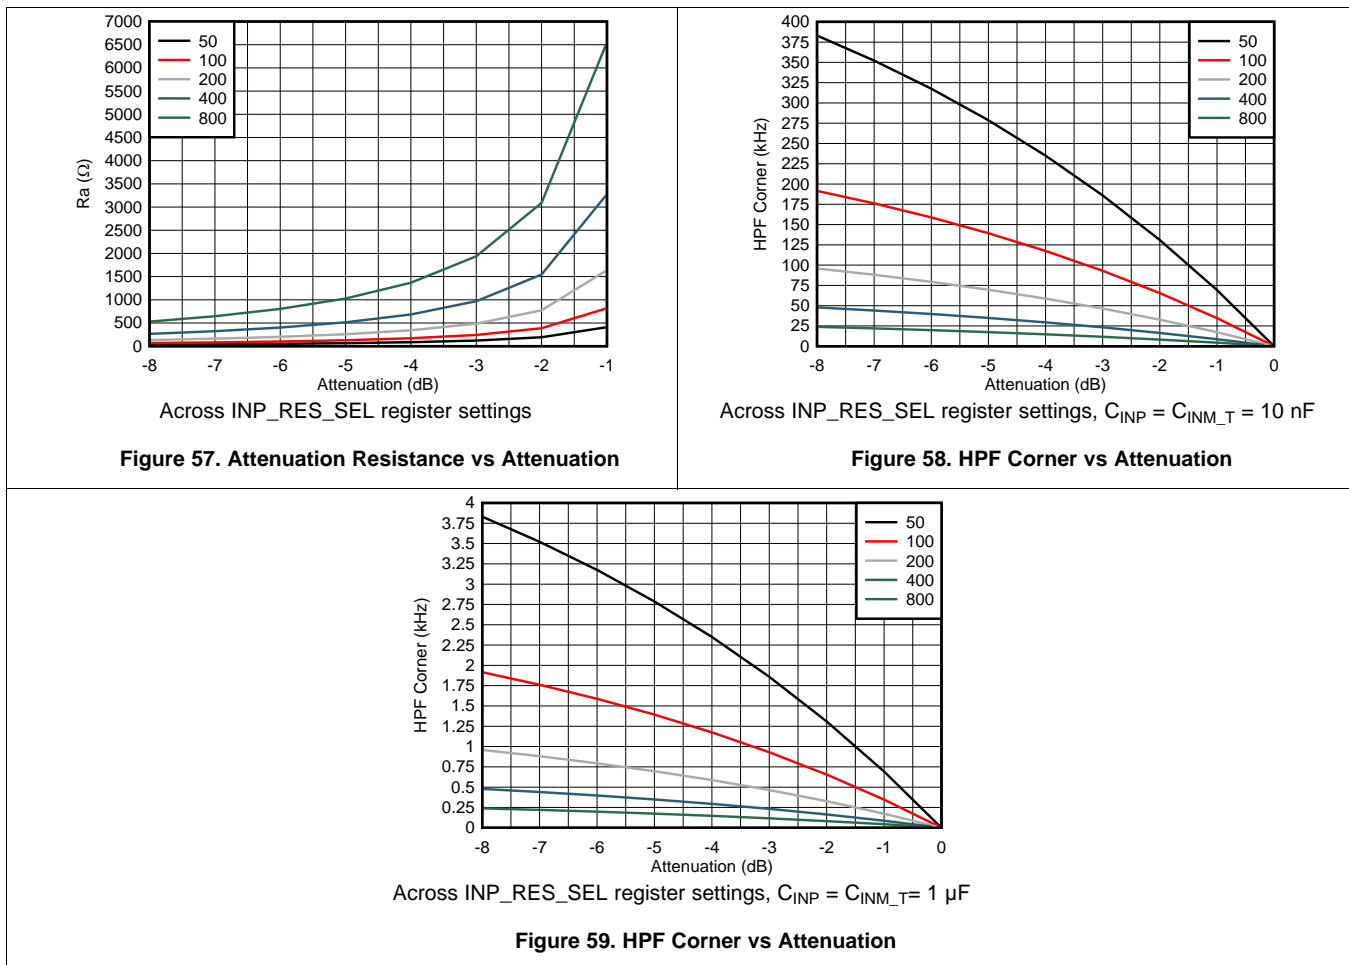

### 9.3.2 Low-Noise Amplifier (LNA)

In many high-gain systems, a LNA is critical to achieve overall performance. The device uses a proprietary architecture and a metal-oxide-semiconductor field-effect transistor (MOSFET) input transistor to achieve exceptional low-noise performance when operating on a low-quiescent current. The LNA takes a single-ended input signal and converts it to a differential output signal.

#### 9.3.2.1 Input Signal Support in TGC Mode

In TGC mode, the LNA supports time-gain compensation [that is, the LNA gain can be changed from 14 dB to 45 dB in steps of 0.125 dB (256 steps total) with time]. Similar to the attenuator, the LNA gain is also controlled by the TGC control engine.

In TGC mode, the maximum differential swing supported at the LNA output is  $2 V_{PP}$ . Therefore, the maximum swing supported at the LNA input is given by  $2 V_{PP}$  divided by the LNA gain. For an LNA gain of 14 dB, the maximum swing supported at the LNA input is  $400 \text{ mV}_{PP}$ .

### 9.3.2.2 Input Signal Support in CW Mode

In CW mode, the LNA is automatically configured to a 18-dB, fixed-gain mode. In CW mode, the LNA supports a maximum linear input range of 300 mV<sub>PP</sub>.

### 9.3.2.3 Input Circuit

In both CW and TGC modes, the LNA input pin (INPx) is internally biased at approximately 1 V. AC-couple the input signal to the INPx pin with an adequately-sized capacitor, C<sub>INP</sub>; a 10-nF capacitor is recommended. For low-frequency applications, a 1-μF capacitor is recommended for both C<sub>INP</sub> and C<sub>INM\_EXT</sub>. The electrical interface of the input attenuator and the LNA to the external world is shown in Figure 60.

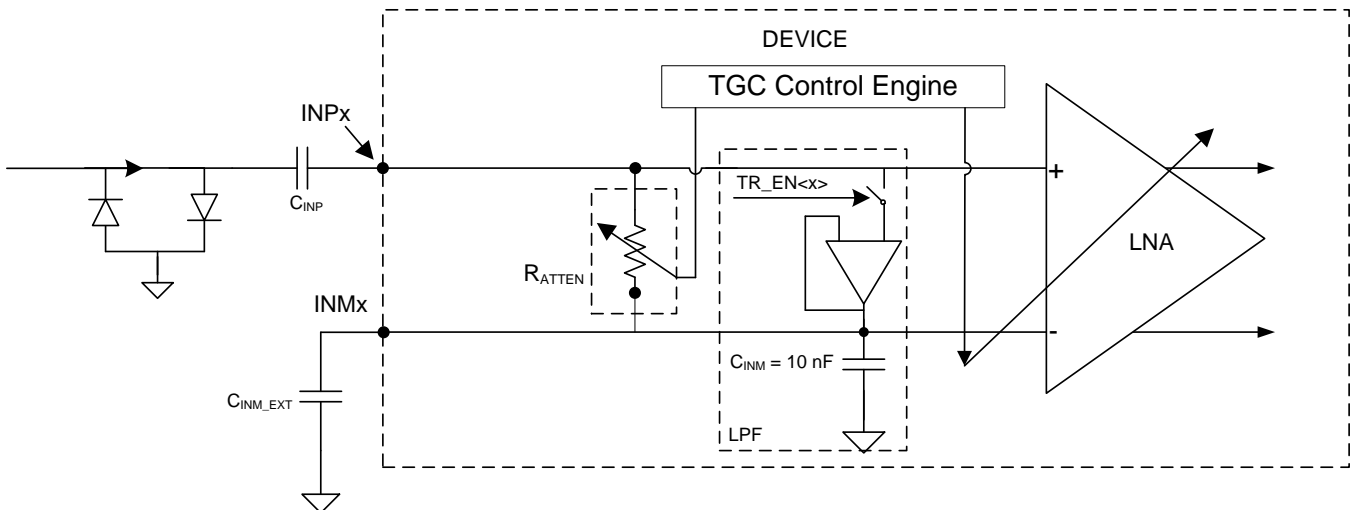


Figure 60. Device Input Circuit

### 9.3.2.4 LNA High-Pass Filter (LNA HPF)

The LPF circuit in Figure 60 is a low-pass transfer function between the positive and negative inputs of the LNA. The LPF results in a high-pass transfer function between the LNA input and output and can be used to reject unwanted low-frequency leakage signal from the transducer. The high-pass filter in the LNA is active for both CW and TGC mode. The effective corner frequency of the HPF is determined by the capacitor connected at the INMx pin of the device. Internal to the device, a 10-nF capacitor is connected at the INMx node. A large capacitor (such as 1 μF) can be connected externally at the INMx pin for setting the low corner frequency (< 2 kHz) of the LNA dc offset correction circuit. By default, a capacitor is not required to be connected at the INMx pin. To disable this HPF, set the LNA\_HP\_FDIS register bit to 1. This bit powers down the unity feedback buffer connected between positive and negative input of the LNA shown in Figure 60. For a given INMx capacitor, the corner frequency of the HPF can be programmed using the LNA\_HP\_FPROG bit. Table 3 lists the HPF corner frequency as a function of the C<sub>INM\_EXT</sub> capacitor connected at the INMx pin across various LNA\_HP\_FPROG bit settings.

Table 3. HPF Corner Programming Bits

LNA_HP_FPROG	HPF CORNER WITHOUT CONNECTING A CAPACITOR AT THE INMx PIN	HPF CORNER WITH A C <sub>INM_EXT</sub> CAPACITOR CONNECTED AT THE INMx PIN
00	75 kHz	75 kHz × 10 nF / (10 nF + C <sub>INM_EXT</sub> )
01	150 kHz	150 kHz × 10 nF / (10 nF + C <sub>INM_EXT</sub> )
10	300 kHz	300 kHz × 10 nF / (10 nF + C <sub>INM_EXT</sub> )
11	600 kHz	600 kHz × 10 nF / (10 nF + C <sub>INM_EXT</sub> )

### 9.3.2.4.1 Disconnecting the LNA HPF During Overload

In ultrasound systems, the device detects a large-amplitude, overloaded signal during transmit phase. The AFE used for such systems is expected to quickly switch from a high overloaded state to a normal state.

To implement a very low LNA high-pass filter corner, the device uses a large capacitor at the INMx node. The INMx node voltage changes as a result of the large overload signal, which ultimately leads to a low-frequency settling at the device output. To avoid any significant disturbance on the INMx node voltage change resulting from an overloaded input signal, the LNA HPF circuit can be disconnected from the INPx pin by using a series switch; see Figure 60. This switch is controlled by the TR\_EN<x> pins (TR\_EN<1>, TR\_EN<2>, TR\_EN<3>, and TR\_EN<4> control channels 1 to 4, 5 to 8, 9 to 13, and 14 to 16, respectively). Figure 61 shows an example of TR\_EN<x> control signals. Figure 62, Figure 63, Figure 64, and Figure 65 illustrate a positive overload input signal, negative overload input signal, and the corresponding device output for both without and with TR\_EN<x> pin functionality, respectively. The TR\_EN<x> pin functionality refers to using a low-going pulse on TR\_EN<x> during an overload input signal to disconnect the LNA HPF. This functionality is useful when there is not a low-frequency signal immediately after an overload signal.

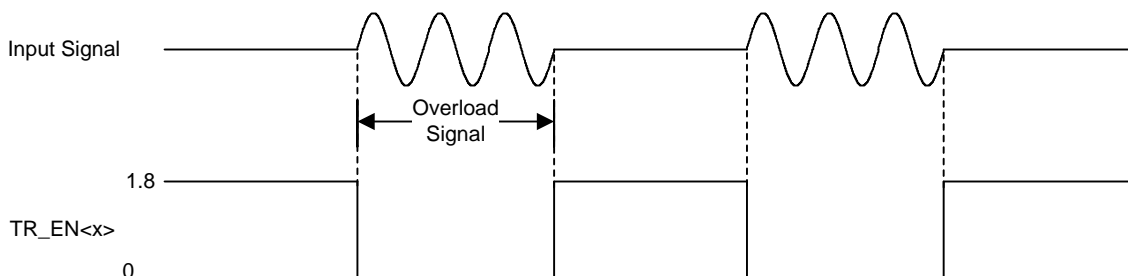


Figure 61. TR\_EN Control Signal

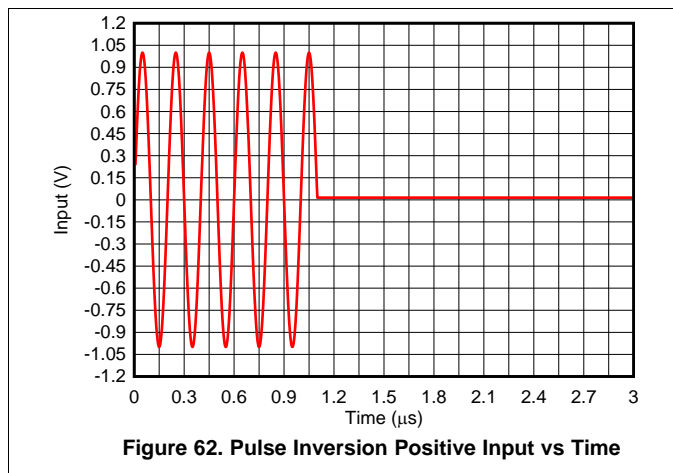


Figure 62. Pulse Inversion Positive Input vs Time



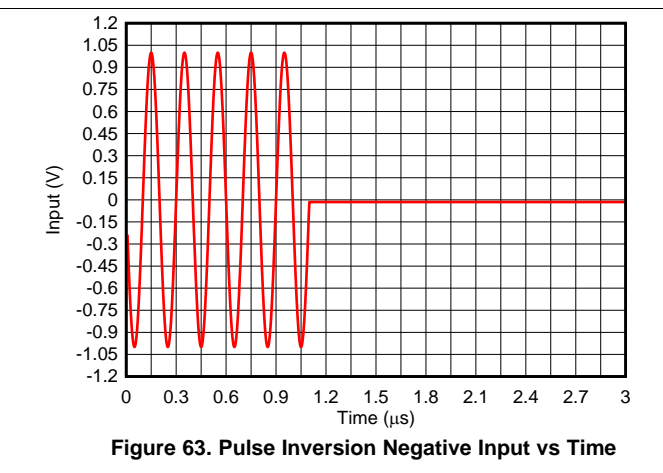


Figure 63. Pulse Inversion Negative Input vs Time

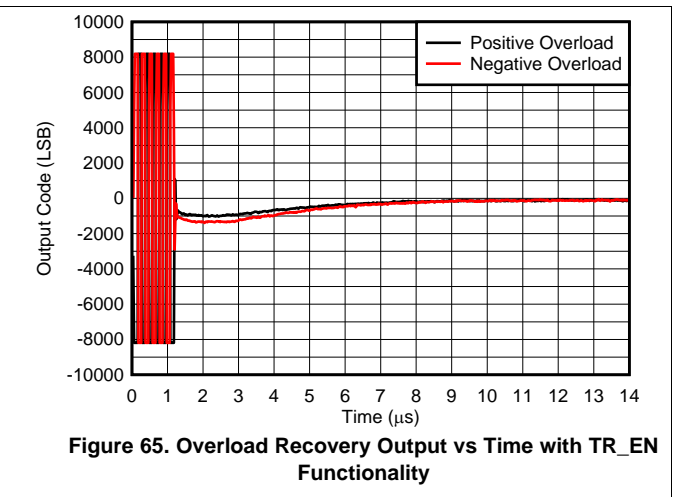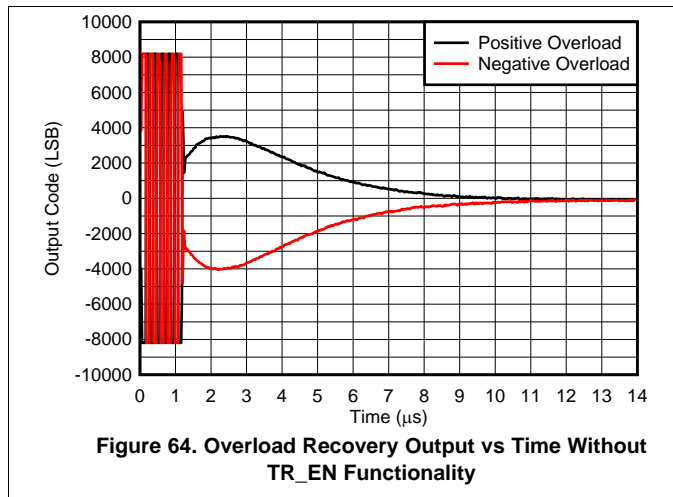

### 9.3.2.5 LNA Noise Contribution

The noise specification is critical for the LNA and determines the dynamic range of the entire system. The device LNA achieves low power, an exceptionally low-noise voltage of 0.95 nV/√Hz at 45-dB gain, and a low-current noise of 1.2 pA/√Hz in low-noise mode.

Voltage noise is the dominant source of noise; however, the LNA current noise flowing through the source impedance ( $R_S$ ) generates additional voltage noise. The total LNA noise can be computed with Equation 4.

$$LNA\_Noise_{total} = \sqrt{V_{LNAnoise}^2 + R_S^2 \times I_{LNAnoise}^2} \tag{4}$$

The device achieves a low noise figure (NF) over a wide range of source resistances; see Figure 23.

### 9.3.3 High-Pass Filter (HPF)

Two high-pass filters (HPFs) exist in the signal chain. The first high-pass filter is the HPF that is part of the input attenuator and the other filter is the HPF in the low-noise amplifier (LNA). In the preceding sections (see the [LNA High-Pass Filter \(LNA HPF\)](#) and [Attenuator High-Pass Filter \(ATTEN HPF\)](#) sections) the HPF corner expression of the attenuator and LNA is explained, assuming only a single HPF is active at a time. If both HPFs are enabled at the same time, the overall HPF corner is approximately given by the maximum of the two corner frequencies. For instance, if the HPF corner of the attenuator is ( $f_{ATTEN}$ ) Hz and the HPF corner of the LNA is ( $f_{LNA}$ ) Hz, the overall HPF corner is given by the maximum of ( $f_{ATTEN}$ ,  $f_{LNA}$ ) Hz. In CW mode, the attenuator HPF is disabled and the LNA HPF remains active so the overall HPF corner is given by  $f_{LNA}$ .

### 9.3.4 Low-Pass Filter (LPF)

In TGC mode, the LNA output is fed to a low-pass filter (LPF). The LPF is designed as a differential, active, third-order filter with Butterworth characteristics and a typical 18 dB per octave roll-off. Programmable through the serial interface, the -3-dB corner frequency can be set to different combinations across power modes, as shown in Table 4. The filter bandwidth is set for all channels simultaneously.

Note that in CW mode, the LPF is automatically disabled.

**Table 4. LPF Corner Frequency Combinations**

POWER MODE	LPF CORNER FREQUENCY (MHz)
Low noise	10, 15, 20, 25
Medium power	10, 15, 20, 25
Low power	5, 7.5, 10, 12.5

### 9.3.5 Digital TGC (DTGC)

This section discusses the operation of the digital TGC control engine. The DTGC is relevant only in TGC mode; see the [DTGC Register Map](#) for register settings and descriptions.

#### 9.3.5.1 DTGC Overview

As described previously, the device consists of a programmable attenuator, a variable-gain LNA, and a TGC control engine that controls the gain of the device, as shown in [Figure 66](#). In combination, these blocks can be used to implement a digital time gain control (DTGC) scheme. The attenuator block attenuation can be changed from 8 dB to 0 dB in 0.125-dB steps (64 steps) and the LNA gain can be changed from 14 dB to 45 dB in 0.125-dB steps (256 steps). Thus, the total channel gain can be varied from 6 dB to 45 dB in 0.125-dB steps (320 steps). These gain settings are controlled as a function of time based on the different profile settings of the TGC control engine. The TGC control engine operates on the same clock as the ADC\_CLK.

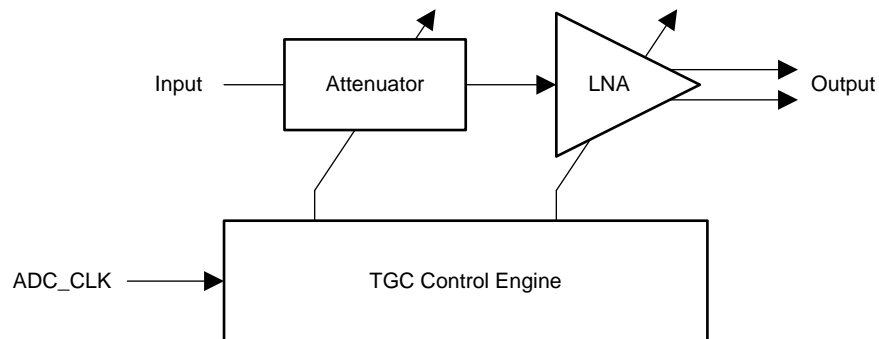


Figure 66. Digital TGC

#### 9.3.5.2 DTGC Programming

Various functions of the digital TGC operation can be programmed using the registers listed in the [DTGC Register Map](#). To program register settings in the DTGC register map, set the DTGC\_WR\_EN bit to 1.

##### 9.3.5.2.1 DTGC Profile

The TGC engine supports four different modes (programmable fixed-gain, up, down ramp, external non-uniform, and internal non-uniform mode) to change the device gain with time. The gain versus time curve for each mode is set using a set of combined parameters referred to as a *profile*. Four such profiles can be programmed in advance, which enables a given mode to switch between one of four profiles based on either a pin control or based on a single register control. [Table 5](#) shows the profile mapping with register bits.

Table 5. Profile Registers Address

PROFILE	REGISTER BITS IN THE DTGC REGISTER MAP
0	Registers 161 (bits 15-0), 162 (bits 15-0), 163 (bits 15-0), 164 (bits 15-0), 165 (bits 15-0), and 185 (bits 15-8)
1	Registers 166 (bits 15-0), 167 (bits 15-0), 168 (bits 15-0), 169 (bits 15-0), 170 (bits 15-0), and 185 (bits 7-0)
2	Registers 171 (bits 15-0), 172 (bits 15-0), 173 (bits 15-0), 174 (bits 15-0), 175 (bits 15-0), and 186 (bits 15-8)
3	Registers 176 (bits 15-0), 177 (bits 15-0), 178 (bits 15-0), 179 (bits 15-0), 180 (bits 15-0), and 186 (bits 7-0)

### 9.3.5.2.1.1 Profile Selection

When programmed, there are two ways that any one of the four profiles can be selected and switched to program the settings in the TGC mode: either with the device pin or by register settings.

1. Device pin. To select the profile using pin control, set the PROFILE\_EXT\_DIS bit to 0. Then, the different combinations of logic level at the TGC\_PROF<2> and TGC\_PROF<1> pins listed in [Table 6](#) dictate which profile is selected.
2. Register settings. To select the profile with register settings, set the PROFILE\_EXT\_DIS bit to 1. Then, the different combinations of the PROFILE\_REG\_SEL bits listed in [Table 6](#) dictate which profile must be used to program the corresponding TGC mode.

**Table 6. Profile Selection Using the Device Pin or the PROFILE\_REG\_SEL Bits**

PIN CONTROL (PROFILE_EXT_DIS = 0)		REGISTER CONTROL (PROFILE_EXT_DIS = 1)	SELECTED PROFILE
TGC_PROF<2>	TGC_PROF<1>	PROFILE_REG_SEL	
0	0	00	Profile 0
0	1	01	Profile 1
1	0	10	Profile 2
1	1	11	Profile 3

### 9.3.5.3 DTGC Modes

The device supports four schemes to change the device gain. These schemes are referred to as the four DTGC modes. The device can be programmed in any of these modes by using the MODE\_SEL register bit, as shown in [Table 7](#).

**Table 7. DTGC Modes**

MODE_SEL REGISTER BITS SETTING	DTGC MODE
10	Programmable fixed-gain
01	Up, down ramp
00	External non-uniform
11	Internal non-uniform

#### 9.3.5.3.1 Programmable Fixed-Gain Mode

In this mode, the device gain is set directly by writing a gain code in the MANUAL\_GAIN\_DTGC register. See [Figure 2](#) for a description of device gain versus gain code across power modes. Note that the allowed value of the gain code is from 0 to 319. The gain codes from 0 to 63 control the attenuator and the codes from 64 to 319 control the LNA. If the gain code is programmed outside the 0 to 319 range, then the gain code value automatically becomes 0.

For Low-Noise or Medium-Power mode: Gain = 6 + Gain code × 0.125

For Low-Power mode: Gain = 12 + Gain code × 0.125

### 9.3.5.3.2 Up, Down Ramp Mode

Figure 67 shows the change in device gain with time in the up, down ramp mode. This mode generates an ascending gain ramp followed by a descending gain ramp.

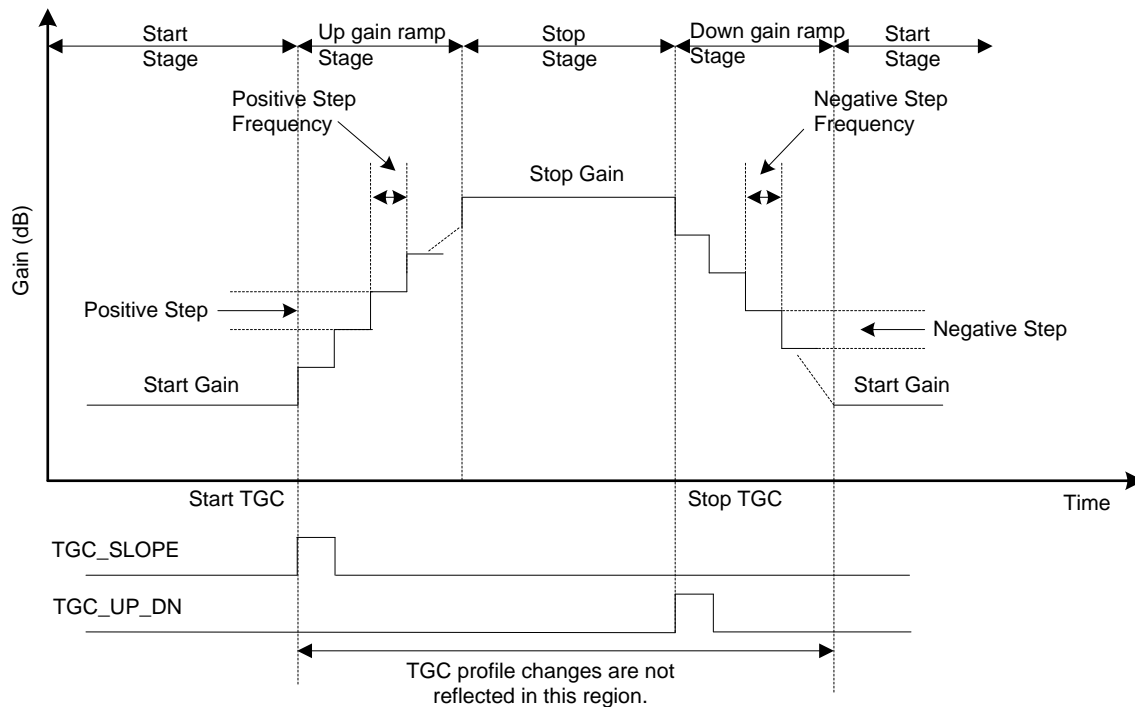


Figure 67. Up, Down Ramp Mode

The different stages of the up, down ramp mode are:

1. Start: At device reset or a DTGC mode change (that is, when changing the DTGC mode to any other mode and returning to up, down ramp mode), the device gain is equal to the start gain.
2. Up gain ramp. The up gain ramp stage starts when the TGC\_SLOPE pin voltage level goes high. During the up gain ramp stage, the device gain increases by a positive step at the rate of the positive step frequency.
3. Stop gain. Any device gain in the up gain ramp stage keeps increasing until a stop gain stage is reached. Any pulses given at the TGC\_SLOPE or TGC\_UP\_DN pins during the up gain ramp stage are ignored.
4. Down gain ramp. The down gain ramp stage starts when the TGC\_UP\_DN pin voltage level goes high. During the down gain ramp stage, the device gain decreases by a negative step at the rate of the negative step frequency. Any device gain in the down gain ramp stage keeps decreasing until a gain reaches the value specified by start gain. Thereafter, the TGC curve proceeds to the start stage.
5. Profile. Different parameters (such as start gain, positive step, positive step frequency, and so forth) of different gain stages are programmed with profile registers. A single profile consists of five 16-bit registers and one 8-bit register that can be programmed with the serial interface registers. The functions of these registers in up, down ramp mode are listed in Table 8. Note that changing the profile number updates the parameters only during the start gain stage.
6. Timing requirement. See the section for timing requirements on the TGC\_SLOPE and TGC\_UP\_DN pins with respect to the ADC clock.

**Table 8. Profile Description for Up, Down Ramp Mode**

REGISTER CONTROL				NAME	NOTATION IN REGISTER MAP	DESCRIPTION	DEFAULT VALUE	ALLOWED RANGE
PROFILE 0	PROFILE 1	PROFILE 2	PROFILE 3					
161 (bits 15-8)	166 (bits 15-8)	171 (bits 15-8)	176 (bits 15-8)	Start gain	START_GAIN_x [15:8]	These bits set the gain code for the start gain. For an $N$ value (in decimal), these bits set the start gain stage to $(6 + N \times 0.25)$ dB. <sup>(1)</sup>	0	0 to 159
161 (bits 7-0)	166 (bits 7-0)	171 (bits 7-0)	176 (bits 7-0)	Stop gain	STOP_GAIN_x[7:0]	These bits set the gain code for the stop gain. For an $N$ value, these bits set the stop gain stage to $(6 + N \times 0.25)$ dB. <sup>(1)</sup>	159	0 to 159
162 (bits 15-11)	167 (bits 15-11)	172 (bits 15-11)	177 (bits 15-11)	Positive step	POS_STEP_x[7:3]	For an $N$ value, these bits set the positive step to $(N + 1) \times 0.125$ dB.	0	0 to 31 <sup>(2)</sup>
162 (bits 10-8)	167 (bits 10-8)	172 (bits 10-8)	177 (bits 10-8)	Positive step frequency	POS_STEP_x[2:0]	For an $N$ value, gain steps at a periodicity of $[f_s / 2^{(7-N)}]$ . Where $f_s$ is the ADC clock frequency. <sup>(1)</sup>	0	0 to 7
162 (bits 7-3)	167 (bits 7-3)	172 (bits 7-3)	177 (bits 7-3)	Negative step	NEG_STEP_x[7:3]	For an $N$ value, these bits set the negative step to $(N + 1) \times 0.125$ dB. <sup>(1)</sup>	31	0 to 31
162 (bits 2-0)	167 (bits 2-0)	172 (bits 2-0)	177 (bits 2-0)	Negative step frequency	NEG_STEP_x[2:0]	For an $N$ value, gain steps at a periodicity of $[f_s / 2^{(7-N)}]$ . Note that $f_s$ is $\geq$ the ADC clock frequency. <sup>(1)</sup>	7	0 to 7
163 to 165 (bits 15-0)	168 to 170 (bits 15-0)	173 to 175 (bits 15-0)	178 to 180 (bits 15-0)	—	—	—	—	N/A
185 (bit 15)	185 (bit 7)	186 (bit 15)	186 (bit 7)	—	FIX_ATTEN_x	0 = Default 1 = Enable fixed attenuation mode	0	0 to 1
185 (bits 14-8)	185 (bits 6-0)	186 (bits 14-8)	186 (bits 6-0)	—	ATTENUATION_x	When the FIX_ATTEN_EN_x bit is set to 1, the attenuation level of the attenuator block is set by the ATTENUATION_0 bits. A value of $N$ written in the ATTENUATION_x register sets the attenuation level at $-8 + N \times 0.125$ dB. <sup>(1)</sup>	0	0 to 64

(1)  $N$  refers to the decimal equivalent of the multi-bit word.

(2) Best image quality is achieved with a value of  $N = 0$  (positive step of 0.125 dB). Using a higher positive step can result in glitches at the gain transitions, causing a reduction in image quality.



### 9.3.5.3.3 External Non-Uniform Mode

Figure 68 shows the change in device gain with time in external non-uniform mode. This mode generates an ascending gain ramp followed by a descending gain ramp. This mode can be made to generate a non-uniform gain profile using appropriate controls on the TGC\_SLOPE and TGC\_UP\_DN pins.

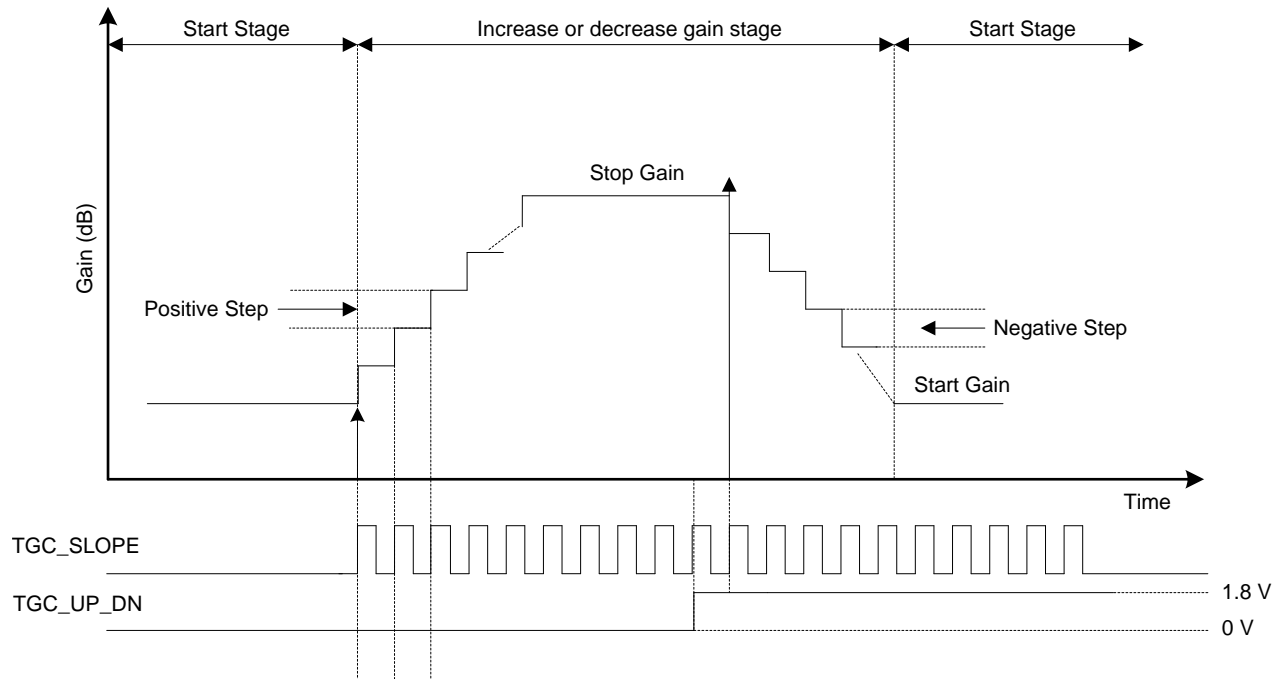


Figure 68. External Non-Uniform Mode

The different stages of the external non-uniform mode are:

1. Start: At device reset or a DTGC mode change (that is, when changing the DTGC mode to any other mode and returning to external non-uniform mode), the device gain is equal to the start gain.
2. Increase or decrease gain. When a positive edge transition is received on the device TGC\_SLOPE pin, the device gain increases or decreases by either a positive step or negative step based on the TGC\_UP\_DN pin voltage level. If the TGC\_UP\_DN pin is set to a level 0, device gain increases and if the TGC\_UP\_DN pin is set to 1, device gain decreases. The signal frequency at the TGC\_SLOPE pin must be less than or equal to the ADC clock.
3. Profile. Different parameters (such as start gain, positive step, negative step, and so forth) of different gain stages are programmed with profile registers. A single profile consists of five 16-bit registers and one 8-bit register that can be programmed with the serial programming interface (SPI). The functions of these registers in external non-uniform mode are listed in Table 9. Note that changing the profile number updates the parameters at any stage of the gain curve.
4. Timing requirement. See the section for timing requirements on the TGC\_SLOPE and TGC\_UP\_DN pins with respect to the ADC clock.

**Table 9. Profile Description for External Non-Uniform Mode**

REGISTER CONTROL				NAME	BIT IN REGISTER MAP	DESCRIPTION	DEFAULT VALUE	ALLOWED RANGE
PROFILE 0	PROFILE 1	PROFILE 2	PROFILE 3					
161 (bits 15-8)	166 (bits 15-8)	171 (bits 15-8)	176 (bits 15-8)	Start gain	START_GAIN_x [15:8]	These bits set the gain code for the start gain stage. For an $N$ value (in decimal), these bits set the start gain stage to $(6 + N \times 0.25)$ dB. <sup>(1)</sup>	0	0 to 159
161 (bits 7-0)	166 (bits 7-0)	171 (bits 7-0)	176 (bits 7-0)	Stop gain	STOP_GAIN_x	These bits set the gain code for the stop gain stage. For an $N$ value, these bits set the stop gain stage to $(6 + N \times 0.25)$ dB. <sup>(1)</sup>	159	0 to 159
162 (bits 15-8)	167 (bits 15-8)	172 (bits 15-8)	177 (bits 15-8)	Positive step	POS_STEP_x	For an $N$ value, these bits set the positive step to $(N + 1) \times 0.125$ dB. <sup>(1)</sup>	0	0 to 255 <sup>(2)</sup>
162 (bits 7-0)	167 (bits 7-0)	172 (bits 7-0)	177 (bits 7-0)	Negative step	NEG_STEP_x	For an $N$ value, these bits set the negative step to $(N + 1) \times 0.125$ dB. <sup>(1)</sup>	255	0 to 255
163 to 165 (bits 15-0)	168 to 170 (bits 15-0)	173 to 175 (bits 15-0)	178 to 180 (bits 15-0)	—	—	—	—	—
185 (bit 15)	185 (bit 7)	186 (bit 15)	186 (bit 7)	—	FIX_ATTEN_x	0 = Default 1 = Enable fixed attenuation mode	0	0 to 1
185 (bits 14-8)	185 (bits 6-0)	186 (bits 14-8)	186 (bits 6-0)	—	ATTENUATION_x	When the FIX_ATTEN_EN_x bit is set to 1, the attenuation level of the attenuator block is set by the ATTENUATION_0 bits. A value of $N$ written in the ATTENUATION_x register sets the attenuation level at $-8 + N \times 0.125$ dB. <sup>(1)</sup>	0	0 to 64

(1)  $N$  refers to the decimal equivalent of the multi-bit word.

(2) Best image quality is achieved with a value of  $N = 0$  (positive step of 0.125 dB). Using a higher positive step can result in glitches at the gain transitions, causing a reduction in image quality.

9.3.5.3.4 Internal Non-Uniform Mode

Figure 69 shows the change in device gain with time in internal non-uniform mode. A gain profile is completely user defined by programming a set of profile registers and a bank of memory consisting of 160 16-bit registers. Programming the profile register is covered in the *DTGC Profile* section. Memory architecture and other information are explained in detail in the *Memory* section.

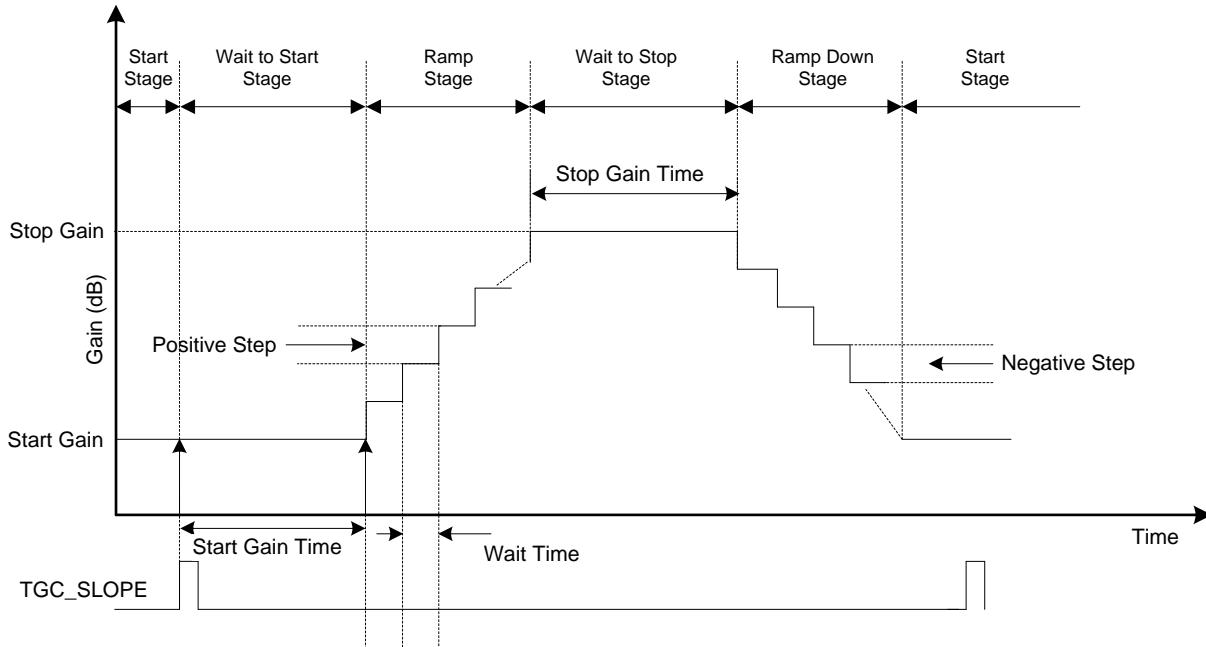


Figure 69. Internal Non-Uniform Mode

9.3.5.3.4.1 Memory

In the device are a total of four memory banks (bank 0 to bank 3), with each bank containing 160 rows and each row is 16 bits in length, as shown in Figure 70. Each memory bank contains the information of the non-uniform gain curve for a particular profile.

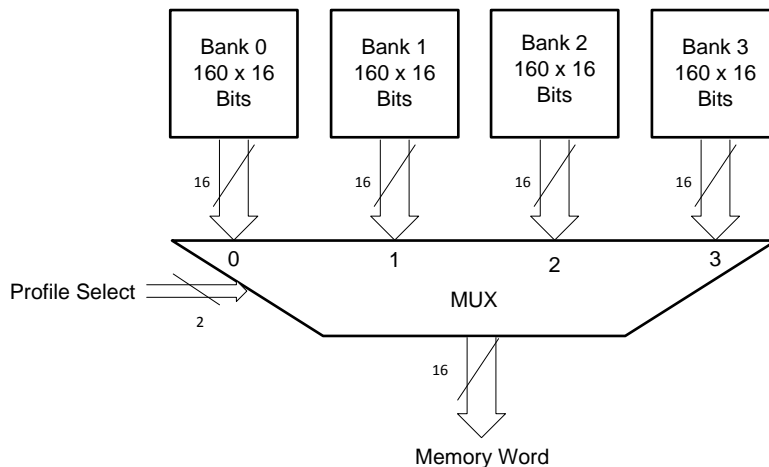


Figure 70. Memory Bank

**9.3.5.3.4.1.1 Write Operation for the Memory**

The device supports two write operation modes: normal write mode and burst write mode. The following steps describe the memory write operation in normal write mode:

1. Select the memory bank whose contents must be programmed using the MEM\_BANK\_SEL register bit. [Table 10](#) shows the mapping of the MEM\_BANK\_SEL and memory bank.

**Table 10. Memory Bank Selection**

MEM_BANK_SEL	MEMORY BANK
00	0
01	1
10	2
11	3

2. After selecting the memory bank, any memory bank word can be programmed by writing the MEM\_WORD\_0 to MEM\_WORD\_159 registers. For example, to program word 1 to word 160 of memory bank 0, first write MEM\_BANK\_SEL = 00 and write the memory content at the MEM\_WORD\_0 to MEM\_WORD\_159 registers.

The following steps describe the memory write operation in burst write mode:

1. Select the memory bank whose contents must be programmed using the MEM\_BANK\_SEL register bit. [Table 10](#) shows the mapping of the MEM\_BANK\_SEL and memory bank.
2. After selecting the memory bank, any memory bank word can be programmed in burst by giving the register address only one time. After giving the register address, provide continuous data on the SDIN pin and keep the SEN signal low. The device automatically internally increments the register address and writes the data to the next memory word.

Figure 71 shows the normal and burst write mode operations.

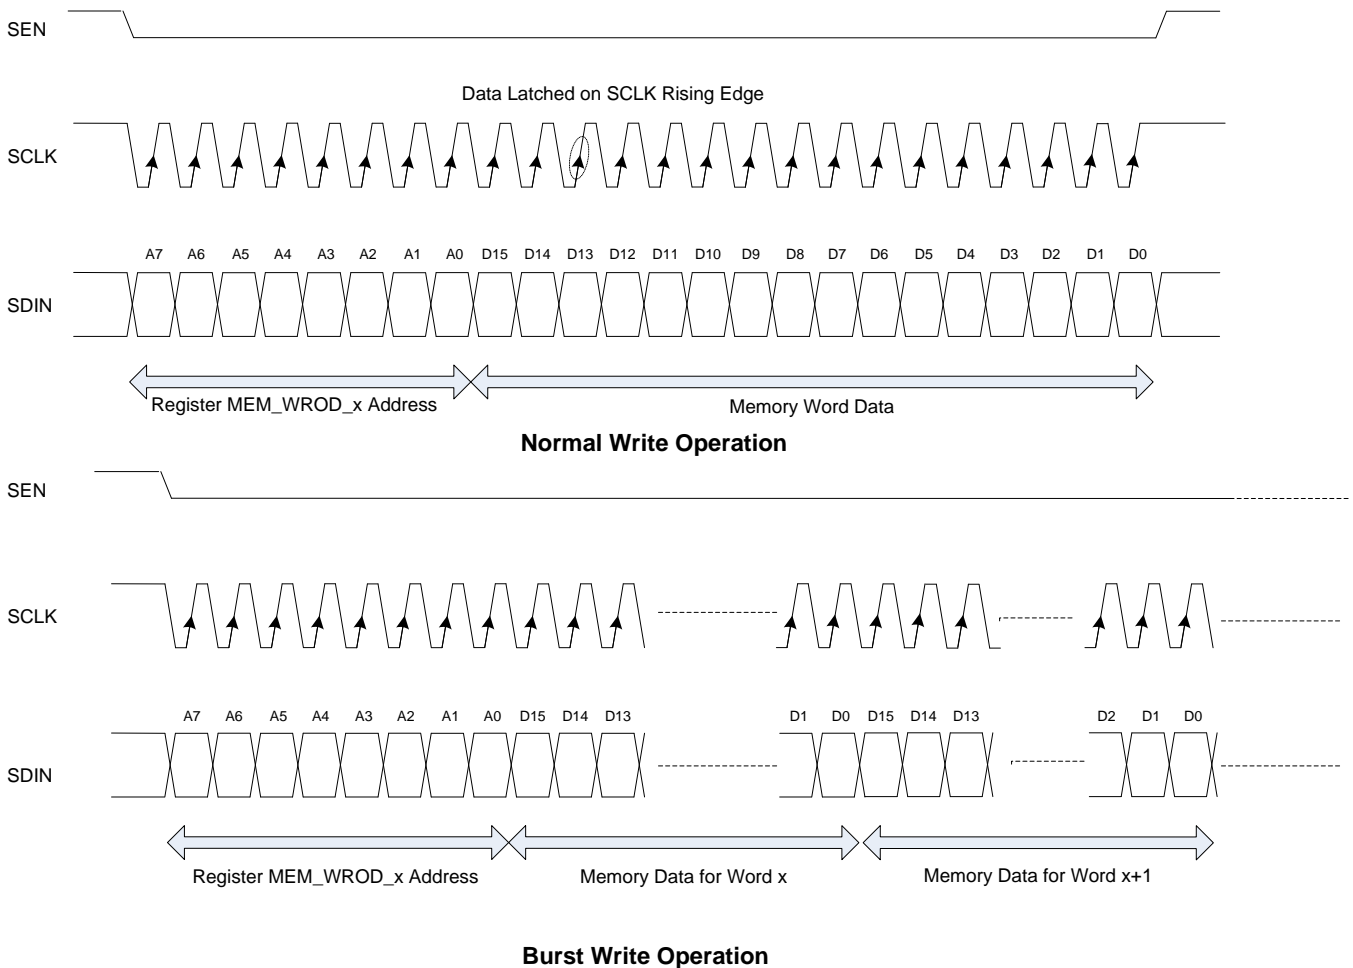


Figure 71. Memory Write Mode

9.3.5.3.4.1.2 Read Operation for the Memory

The memory bank content can be read back in the same manner by reading the registers of the DTGC register map; see the [Register Readout](#) section. To read the content of memory banks 0, 1, 2, or 3, first set the MEM\_BANK\_SEL to 00, 01, 10, or 11 respectively, then place the device in DTGC register read mode and read the MEM\_WORD\_x register to read word x on the SDOUT pin.

**NOTE**

Simultaneous memory read and write operation is not supported.

9.3.5.3.4.2 Gain Curve Description for the Internal Non-Uniform Mode

The internal non-uniform mode operation is described in Figure 72 via a flow chart.

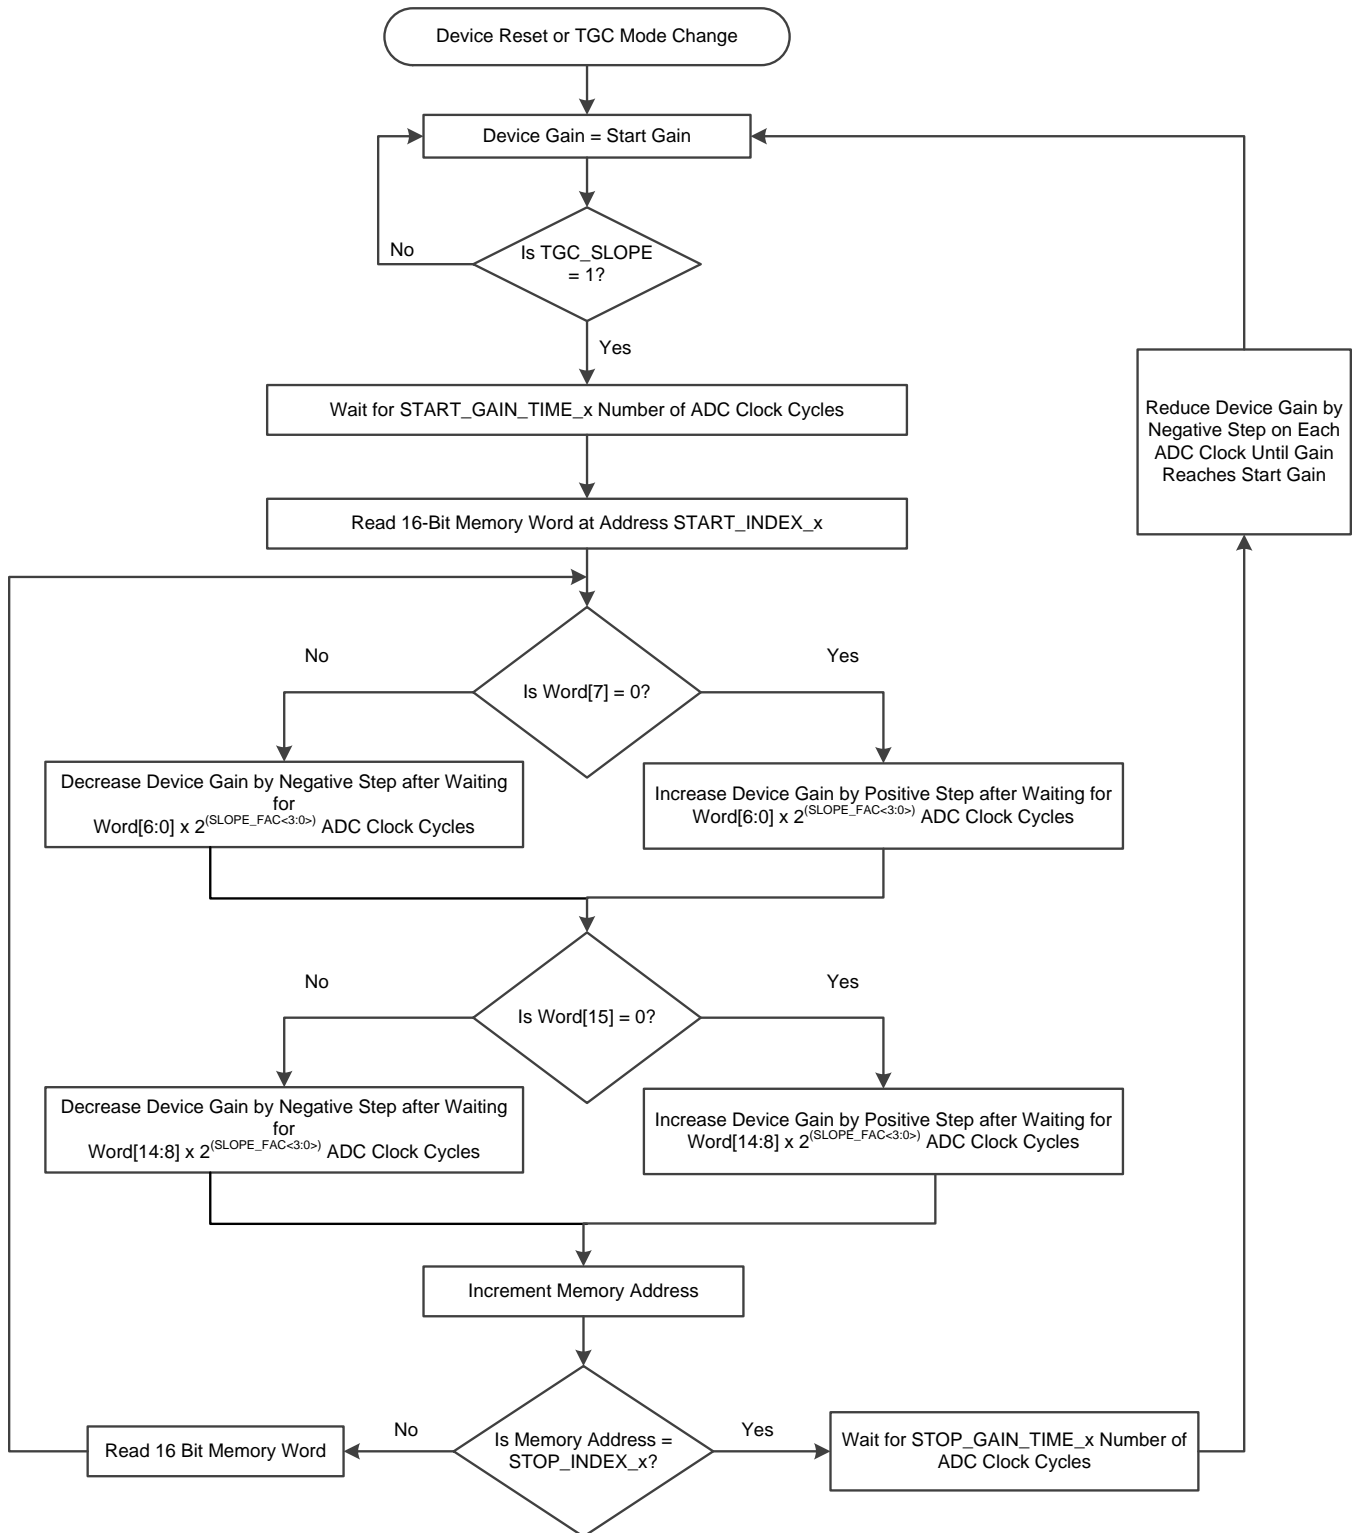


Figure 72. Internal Non-Uniform Mode Operation

The different stages of the internal non-uniform mode are:

1. Start: At device reset or a DTGC mode change (that is, when changing the DTGC mode to any other mode and returning to internal non-uniform mode), the device gain is equal to the start gain.
2. Wait to start: When the TGC\_SLOPE pin voltage level goes high, the device gain remains at the start gain stage for the number of ADC clock cycles defined in the START\_GAIN\_TIME\_x register (x is the profile number).
3. Ramp:
  - a. After waiting for START\_GAIN\_TIME\_x number of ADC clock cycles, the TGC engine reads a 16-bit memory word (word[15:0]) at the START\_INDEX\_x address and performs the following operation:
    - i. If memory word[7] = 0, the device gain increases by a positive step gain after waiting for the  $\text{word}[6:0] \times 2^{\text{SLOPE\_FAC}<3:0>}$  number of ADC clock cycles. If memory word[7] = 1, the device gain decreases by a negative step gain after waiting for the  $\text{word}[6:0] \times 2^{\text{SLOPE\_FAC}<3:0>}$  number of ADC clock cycles.
    - ii. If memory word[15] = 0, the device gain increases by a positive step gain after waiting for the  $\text{word}[14:8] \times 2^{\text{SLOPE\_FAC}<3:0>}$  number of ADC clock cycles. If memory word[15] = 1, the device gain decreases by a negative step gain after waiting for the  $\text{word}[14:8] \times 2^{\text{SLOPE\_FAC}<3:0>}$  number of ADC clock cycles.
  - b. The TGC engine increases the memory address by 1. If the new address is less than STOP\_INDEX\_x, the TGC engine reads a 16-bit memory word at the new address and repeats steps i and ii.
4. Wait to stop: The TGC engine increases the memory address by 1. If the new memory address is equal to STOP\_INDEX\_x, then the device waits for the STOP\_GAIN\_TIME\_x number of ADC clock cycles.
5. Ramp down: After waiting for the STOP\_GAIN\_TIME\_x number of ADC clock cycles, the device gain starts reducing by a negative step gain on each ADC clock until the gain reaches the start gain stage.
6. Profile: Different parameters (such as start gain, positive step, positive step frequency, and so forth) of different gain stages are programmed with profile registers. A single profile consists of five 16-bit registers and one 8-bit register that can be programmed with the serial programming interface (SPI). The functions of these registers in internal non-uniform mode are listed in [Table 11](#). Note that changing the profile number updates the parameters only during the start gain stage.
7. Timing requirement. See the [Timing Specifications](#) section for timing requirements on the TGC\_SLOPE pin with respect to the ADC clock.

**Table 11. Internal Non-Uniform Mode Profile Definition**

REGISTER CONTROL				NAME	BIT IN REGISTER MAP	DESCRIPTION	DEFAULT VALUE	ALLOWED RANGE
PROFILE 0	PROFILE 1	PROFILE 2	PROFILE 3					
161 (bits 15-8)	166 (bits 15-8)	171 (bits 15-8)	176 (bits 15-8)	Start gain	START_GAIN_x [15:8]	These bits set the gain code for the start gain stage. For an $N$ value (in decimal), these bits set the start gain stage to $(6 + N \times 0.25)$ dB.	0	0 to 159
161 (bits 7-0)	166 (bits 7-0)	171 (bits 7-0)	176 (bits 7-0)	—	STOP_GAIN_x[7:0]	Always write 159	159	0 to 159
162 (bits 15-8)	167 (bits 15-8)	172 (bits 15-8)	177 (bits 15-8)	Positive step	POS_STEP_x[7:0]	For an $N$ value, these bits set the positive step to $(N + 1) \times 0.125$ dB.	0	0 to 255 <sup>(1)</sup>
162 (bits 7-0)	167 (bits 7-0)	172 (bits 7-0)	177 (bits 7-0)	Negative step	NEG_STEP_x[7:0]	For an $N$ value, these bits set the negative step to $(N + 1) \times 0.125$ dB.	255	0 to 255
163 (bits 15-8)	168 (bits 15-8)	173 (bits 15-8)	178 (bits 15-8)	Memory start index	START_INDEX_x	Memory start index	0	0 to 159
163 (bits 7-0)	168 (bits 7-0)	173 (bits 7-0)	178 (bits 7-0)	Memory stop index	STOP_INDEX_x	Memory stop index	159	0 to 159
164 (bits 15-0)	169 (bits 15-0)	174 (bits 15-0)	179 (bits 15-0)	Start gain time	START_GAIN_TIME_x	For an $N$ value, these bits set the start gain time to $N \times$ ADC clock cycles.	0	0 to $(2^{16} - 1)$
165 (bits 15-0)	170 (bits 15-0)	175 (bits 15-0)	180 (bits 15-0)	Stop gain time	STOP_GAIN_TIME_x	For an $N$ value, these bits set the stop gain time to $N \times$ ADC clock cycles.	0	0 to $(2^{16} - 1)$
185 (bit 15)	185 (bit 7)	186 (bit 15)	186 (bit 7)	—	FIX_ATTEN_x	0 = Default 1 = Enable fixed attenuation mode	0	0 to 1
185 (bits 14-8)	185 (bits 6-0)	186 (bits 14-8)	186 (bits 6-0)	—	ATTENUATION_x	When the FIX_ATTEN_EN_x bit is set to 1, the attenuation level of the attenuator block is set by the ATTENUATION_0 bits. A value of $N$ written in the ATTENUATION_x register sets the attenuation level at $-8 + N \times 0.125$ dB.	0	0 to 64


(1) Best image quality is achieved with a value of  $N = 0$  (positive step of 0.125 dB). Using a higher positive step can result in glitches at the gain transitions, causing a reduction in image quality.

### 9.3.5.4 Timing Specifications

For all DTGC modes, a signal applied on the TGC\_SLOPE and TGC\_UP\_DN pins must meet the timing constraints with respect to the ADC clock signal, as shown in Figure 73.

#### NOTE

Failure to meet the timing constraints in the up, down ramp mode results in a locked state. To come out of a locked start state, change MODE\_SEL to another mode and return to up, down ramp mode or reset the device.

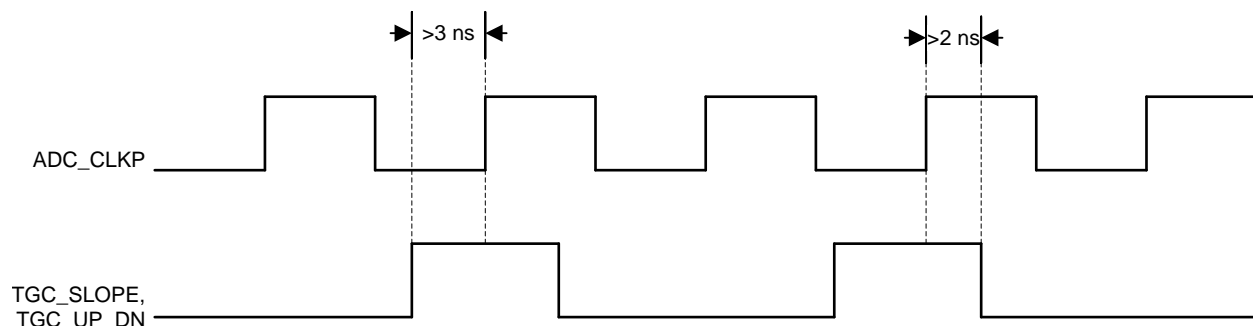
**Figure 73. TGC Timing Diagram**

A transition on TGC\_SLOPE triggers the associated gain change event with a latency. This latency varies depending on the DTGC modes. Table 12 lists the latency for each mode in terms of number of ADC\_CLK cycles. To determine the total latency from a transition on TGC\_SLOPE to a transition in the output code, the latency of the ADC must be added to the number in Table 12.



**Table 12. Latency Between a Transition in TGC\_SLOPE and the Resulting Change in Gain**

DTGC MODE	LATENCY FROM TGC_SLOPE TRANSITION TO A CHANGE IN GAIN
Up, down ramp	6 ADC_CLKs
External non-uniform	2 ADC_CLKs
Internal non-uniform	11 ADC_CLKs

No timing constraints are required on signals applied at the TGC\_PROF<2> and TGC\_PROF<1> pins.

### 9.3.6 Continuous-Wave (CW) Beamformer

The continuous-wave Doppler (CWD) is a key function in mid-end to high-end ultrasound systems. Compared to the TGC mode, the CW path must handle high dynamic range along with strict phase noise performance. CW beamforming is often implemented in the analog domain because of these strict requirements. Multiple beamforming methods are implemented in ultrasound systems, including a passive delay line, active mixer, and passive mixer. Among these approaches, the passive mixer achieves optimized power and noise. This mixer satisfies the CW processing requirements (such as wide dynamic range, low phase noise, and accurate gain and phase matching).

The output signal in the CW path is a current output unlike the TGC path that has a voltage output. The down-converted and phase-shifted currents of all the channels are summed and given to a single node; see [Figure 74](#). Connect this node to the virtual ground of an external differential amplifier for correct operation; see [Figure 75](#).

---

#### NOTE

The local oscillator inputs of the passive mixer are  $\cos(\omega t)$  for the I channel and  $\sin(\omega t)$  (where  $\omega$  is local oscillator frequency) for the Q channel, respectively. Depending on the application-specific CWD complex FFT processing, swapping the I and Q channels in either the field-programmable gate array (FPGA) or digital signal processor (DSP) can be required in order to obtain correct blood flow direction.

---

All blocks include well-matched, in-phase, quadrature channels to achieve good image frequency rejection as well as beamforming accuracy. As a result, the image rejection ratio from an I/Q channel is excellent, which is desired in ultrasound systems.

---

#### NOTE

The TGC path in the device is automatically disabled when the CW path is enabled. The device does not support both TGC and CW modes simultaneously. However though not used, the ADC remains powered up by default in the CW mode. The ADC can be powered down using register bit GLOBAL\_PDN.

---


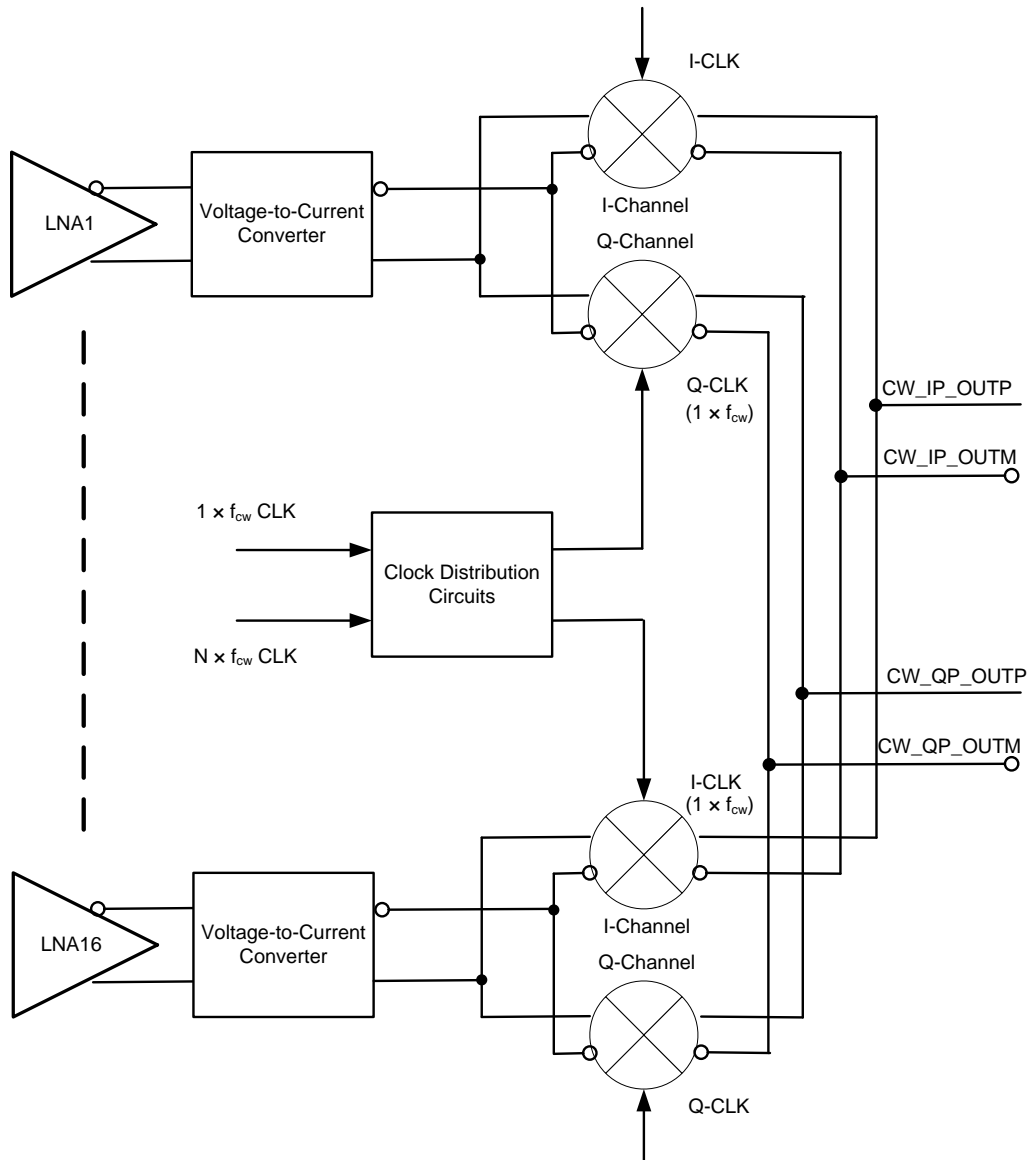


Figure 74. Simplified Block Diagram of the CW Path

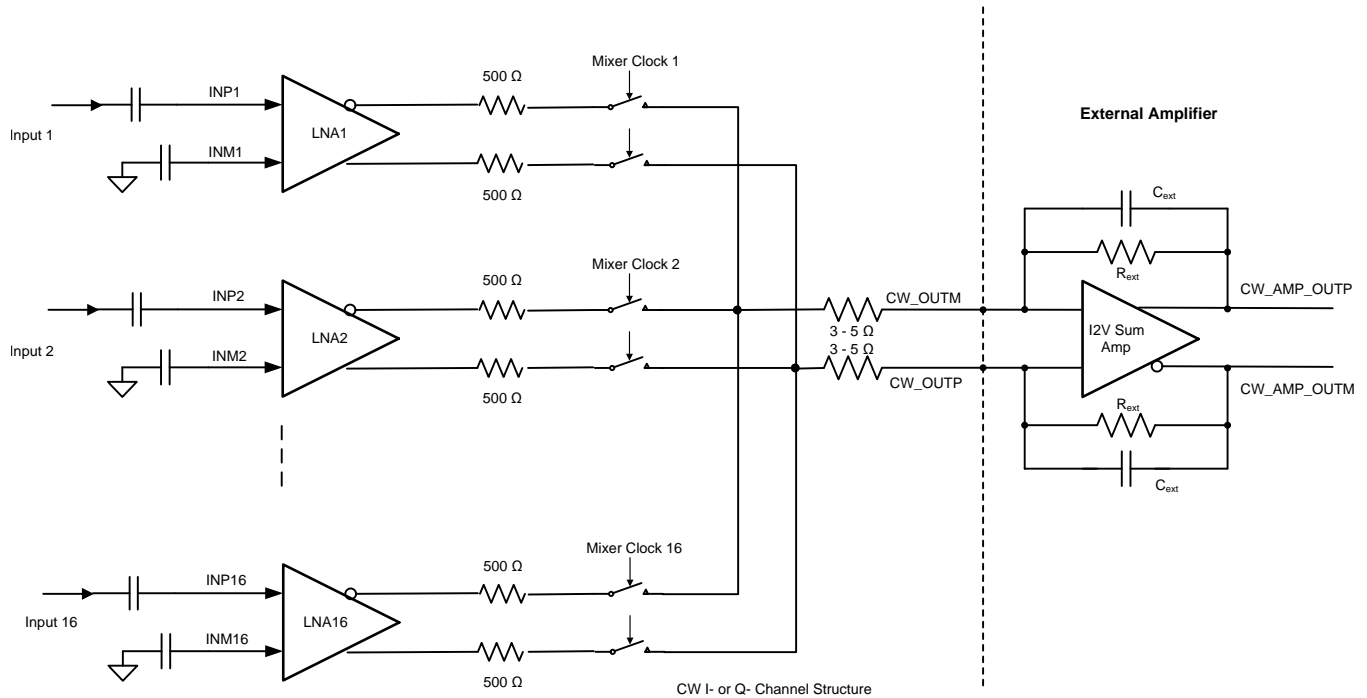


NOTE: The 3-Ω to 6-Ω resistors at CW\_OUTP and CW\_OUTM result from the internal device routing and can create a slight attenuation in the signal.

**Figure 75. A Circuit Representation of a In-Phase or Quadrature-Phase Channel**

The CW mixing operation attempts to down-convert the signal band to approximately dc such that the Doppler frequency is translated to a low-frequency signal. This process is done by a complex mixing of the signal with a clock that is at the same frequency as the center frequency of the signal. The complex mixing of the signal requires the I- and Q- version of the clock. Furthermore, different channels can have different phase delays in the path of their analog inputs. Thus, the programmability of the phase of the I- and Q- clock is essential to have. The CW mixer uses two clocks; a high speed clock (16X, 8X, or 4X of the mixing clock) that is used to generate multiple phases of a 1X clock, which is at the frequency of the mixing clock.

The CW mixer in the device is passive and switch based; the passive mixer adds less noise than active mixers. The CW mixer achieves good performance at low power. Figure 76, Table 13, and the calculations of Equation 5 describe the principles of the mixer operation. LO(t) is square-wave based and includes odd harmonic components.

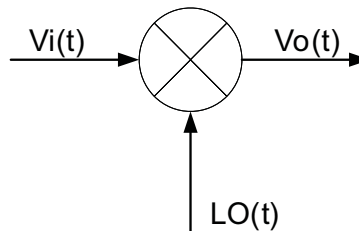

**Figure 76. CW Mixer Operation Block Diagram**

**Table 13. Symbol Definition for CW Mixing**

SYMBOL	DEFINITION
$V_i(t)$	Input signal to the mixer
$V_o(t)$	Output of the mixer
$LO(t)$	Local oscillator signal (1X clock) with appropriate phase
$\omega_0$	Input signal center frequency in radians per second
$f_0$	Input signal center frequency in Hz
$\omega_d$	Doppler shift frequency in radians per second
$t$	Time
$\varphi$	Input signal phase relative to the phase of $LO(t)$

$$\begin{aligned}
 V_i(t) &= \sin(\omega_0 t + \omega_d t + \varphi) \\
 LO(t) &= \frac{4}{\pi} \left[ \sin(\omega_0 t) + \frac{1}{3} \sin(3\omega_0 t) + \frac{1}{5} \sin(5\omega_0 t) \dots \right] \text{-- Fourier series of square wave} \\
 V_o(t) &= \frac{2}{\pi} \left[ \cos(\omega_d t + \varphi) - \cos(2\omega_0 t + \omega_d t + \varphi) + \dots \right]
 \end{aligned} \tag{5}$$

All the symbol definitions for [Equation 5](#) are given in [Table 13](#).

The first term in [Equation 5](#) represents the ideal down-connected Doppler frequency component desired from the CW mixer. Though not shown in [Equation 5](#), the third- and fifth-order harmonics from  $LO(t)$  can either mix with the third- and fifth-order harmonic of the  $V_i(t)$  signal or the noise around the third- and fifth-order harmonics of  $V_i(t)$ . This higher-order mixing can result in additional undesired down-converted components that lead to degraded mixer performance. In order to eliminate this side-effect resulting from the square-wave demodulation, a proprietary harmonic-suppression circuit is implemented in the device. The third- and fifth-order harmonic components from the LO can be suppressed by over 12 dB. Thus, the LNA output noise around the third- and fifth-order harmonic bands are not down-converted to base band. Thus, a better noise figure is achieved. The conversion loss of the mixer is approximately  $-4$  dB,  $(20 \log_{10} 2 / \pi)$ .

The mixed current output of the 16 channels must be summed externally; see [Figure 75](#). The external differential amplifier converts the current signal to differential voltage and can also provide a filtering action for the higher frequency components in [Equation 5](#). The common-mode voltage at the CW\_OUT nodes is 0.9 V. Setting the output common-mode of the external amplifier to 0.9 V is recommended to avoid common-mode loading. The amplifier must be able to support the maximum output current of the device, which is 80 mA<sub>PP</sub>. The amplifier noise and matching have a direct impact on the I/Q channel performance and therefore must be selected cautiously. Amplifiers with input-referred voltage noise lower than 2 nV/ $\sqrt{\text{Hz}}$  can be selected. The [OPA1632](#) and [THS4130](#) for are recommended as external amplifiers, both of which satisfy the above criteria.

The CW I/Q channels are well-matched internally to suppress image frequency components in the Doppler spectrum. Use low-tolerance (0.1%) components and precise operational amplifiers to achieve good matching in the external circuits as well. The circuit illustrated in [Figure 75](#) achieves a first-order filter with a corner frequency of  $f_C$ , as given by [Equation 6](#):

$$f_C = \frac{1}{2 \times \pi \times R_{\text{ext}} \times C_{\text{ext}}} \tag{6}$$

The CW path gain (see [Figure 75](#)) for an in-band signal (frequency less than  $f_C$ ) at one of the channels is given by the combination of LNA gain, mixer loss, and gain provided by the external amplifier. The LNA gain is 18 dB and the mixer attenuation is 4 dB. The gain of the external amplifier is determined by the ratio of the external resistor ( $R_{\text{ext}}$ ) and the internal resistor (500  $\Omega$ ). The CW gain is given by [Equation 7](#).

$$\text{Gain (dB)} = 18 - 4 + 20 \times \log_{10} \left( \frac{R_{\text{ext}}}{500} \right) \tag{7}$$

The 3- $\Omega$  to 5- $\Omega$  resistors shown in [Figure 75](#) create a small loss. Multiple clock options are supported in the device CW path. Two CW clock inputs are required: an  $N \times f_{\text{CW}}$  clock and a  $1 \times f_{\text{CW}}$  clock, where  $f_{\text{CW}}$  is the CW transmitting frequency and  $N$  can be 16, 8, 4, or 1. The most convenient system clock solution can be selected for the device. In the  $16 \times f_{\text{CW}}$  and  $8 \times f_{\text{CW}}$  modes, the third- and fifth-order harmonic suppression feature is supported. Thus, the  $16 \times f_{\text{CW}}$  and  $8 \times f_{\text{CW}}$  modes achieve better performance than the  $4 \times f_{\text{CW}}$  and  $1 \times f_{\text{CW}}$  modes.

9.3.6.1  $16 \times f_{CW}$  Mode

The  $16 \times f_{CW}$  mode achieves the best phase accuracy compared to the other modes. This mode is the default mode for CW operation. In this mode,  $16 \times f_{CW}$  and  $1 \times f_{CW}$  clocks are required.  $16 \times f_{CW}$  generates the  $16 \times f_{CW}$  LO signals with 16 accurate phases. Multiple devices can be synchronized by the  $1 \times f_{CW}$  (that is, LO signals in multiple AFEs can have the same starting phase). The phase noise specification is critical only for the 16X clock. The 1X clock is for synchronization only and does not require low phase noise.

The top-level clock distribution diagram is shown in Figure 77. Each mixer clock is distributed through a  $16 \times 16$  cross-point switch. The inputs of the cross-point switch are 16 different phases of the 1X clock. Synchronizing the  $1 \times f_{CW}$  and  $16 \times f_{CW}$  clocks is recommended; see Figure 78.

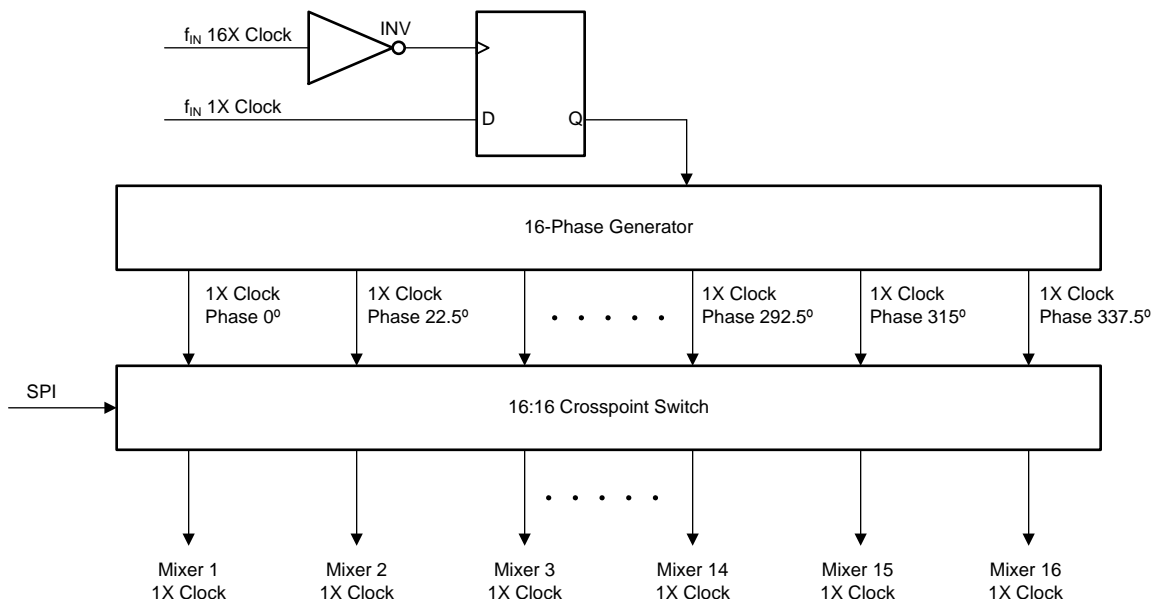
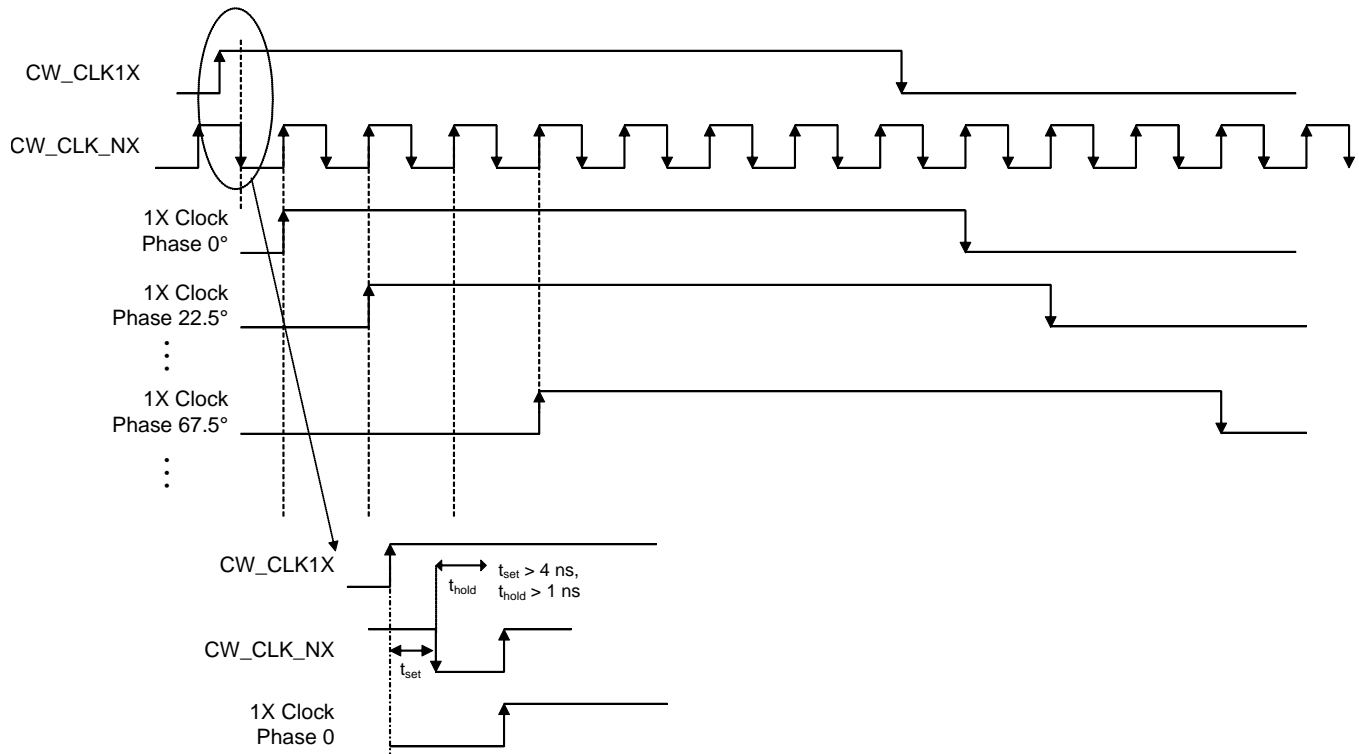


Figure 77. CW Clock Distribution Scheme


**Figure 78. 1X and 16X CW Clock Timing Diagram**

The cross-point switch distributes the clocks with an appropriate phase delay to each mixer. The mixer phase delay is used to compensate for the delay in the input signal. For instance, if a received signal  $V_i(t)$  is delayed with a time of  $1 / (16 \times f_0)$  (where  $f_0$  is the input signal frequency in Hz), apply a delayed LO(t) to the mixer in order to compensate for the  $1 / (16 \times f_0)$  delay. Thus, a 22.5° delayed clock (that is,  $2\pi / 16$ ) is selected for this channel. The mathematical calculation is expressed in Equation 8. Therefore, after the I/Q mixers, the phase delay in the received signals is compensated. The mixer outputs from all channels are aligned and added linearly to improve the signal-to-noise ratio.

$$V_i(t) = \sin\left[\omega_0\left(t - \frac{1}{16f_0}\right) + \omega_d t\right] = \sin[\omega_0 t - 22.5^\circ + \omega_d t]$$

$$LO(t) = \frac{4}{\pi} \sin\left[\omega_0\left(t - \frac{1}{16f_0}\right)\right] = \frac{4}{\pi} \sin[\omega_0 t - 22.5^\circ]$$

$$V_o(t) = \frac{2}{\pi} \cos(\omega_d t) + f(\omega_n t)$$

(8)

$V_o(t)$  represents the demodulated Doppler signal of each channel. When the Doppler signals from N channels are summed, the signal-to-noise ratio improves.  $\omega_d$  is the Doppler frequency,  $\omega_0$  is the local oscillator frequency, and  $\omega_n$  represents the high-frequency components that are filtered out.

### 9.3.6.2 $8 \times f_{CW}$ and $4 \times f_{CW}$ Modes

The  $8 \times f_{CW}$  and  $4 \times f_{CW}$  modes are alternative modes when a higher frequency clock solution (that is, a  $16 \times f_{CW}$  clock) is not available in the system. The block diagram of these two modes is shown in Figure 79.

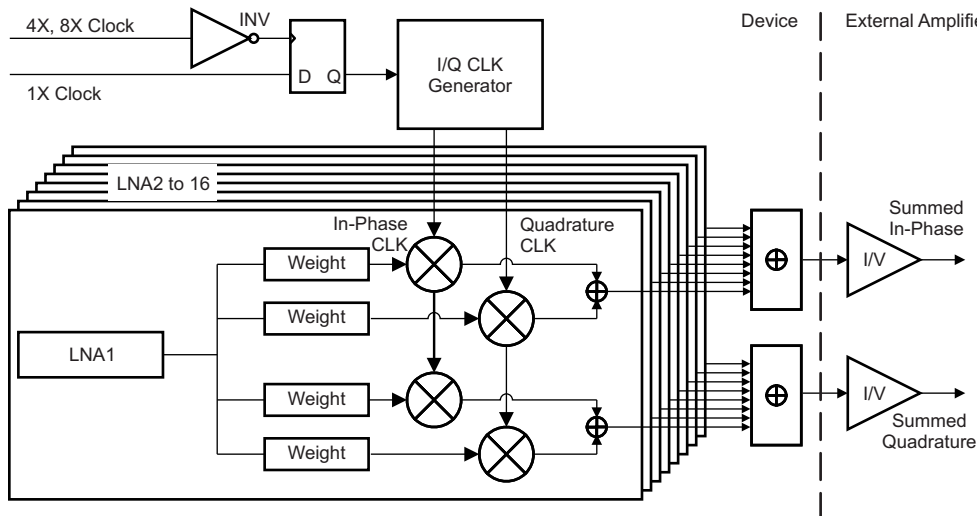


Figure 79.  $8 \times f_{CW}$  and  $4 \times f_{CW}$  Block Diagram

Good phase accuracy and matching are also maintained in these modes. The quadrature clock generator is used to create in-phase and quadrature clocks with exactly a  $90^\circ$  phase difference. The difference between the  $8 \times f_{CW}$  and  $4 \times f_{CW}$  modes is the accessibility of the third- and fifth-order harmonic suppression filter. In the  $8 \times f_{CW}$  mode, the suppression filter can be supported. Although the phases of the  $1X$  clock that can be directly ensured in the  $8 \times f_{CW}$  and  $4 \times f_{CW}$  modes are fewer than in the  $16 \times f_{CW}$  mode, the intermediate phases can be generated by appropriate weighting and combination of I- and Q- signals. For example, if a delay of  $1 / (16 \times f_0)$  or  $22.5^\circ$  is targeted corresponding to  $LO(t)$ , the weighting coefficients must follow Equation 9 (assuming  $I_{in}$  and  $Q_{in}$  are  $\sin(\omega_0 t)$  and  $\cos(\omega_0 t)$ , respectively).

$$I_{delayed}(t) = I_{in} \cos\left(-\frac{2\pi}{16}\right) + Q_{in} \sin\left(-\frac{2\pi}{16}\right) = I_{in}\left(t - \frac{1}{16f_0}\right)$$

$$Q_{delayed}(t) = Q_{in} \cos\left(-\frac{2\pi}{16}\right) - I_{in} \sin\left(-\frac{2\pi}{16}\right) = Q_{in}\left(t - \frac{1}{16f_0}\right)$$

(9)

#### NOTE

The timing requirements for the  $4 \times f_{CW}$  clock relative to the  $1 \times f_{CW}$  clock are illustrated in Figure 80. A similar timing requirement ( $t_{set}$  and  $t_{hold}$ ) is also applicable for the  $8 \times f_{CW}$  clock.

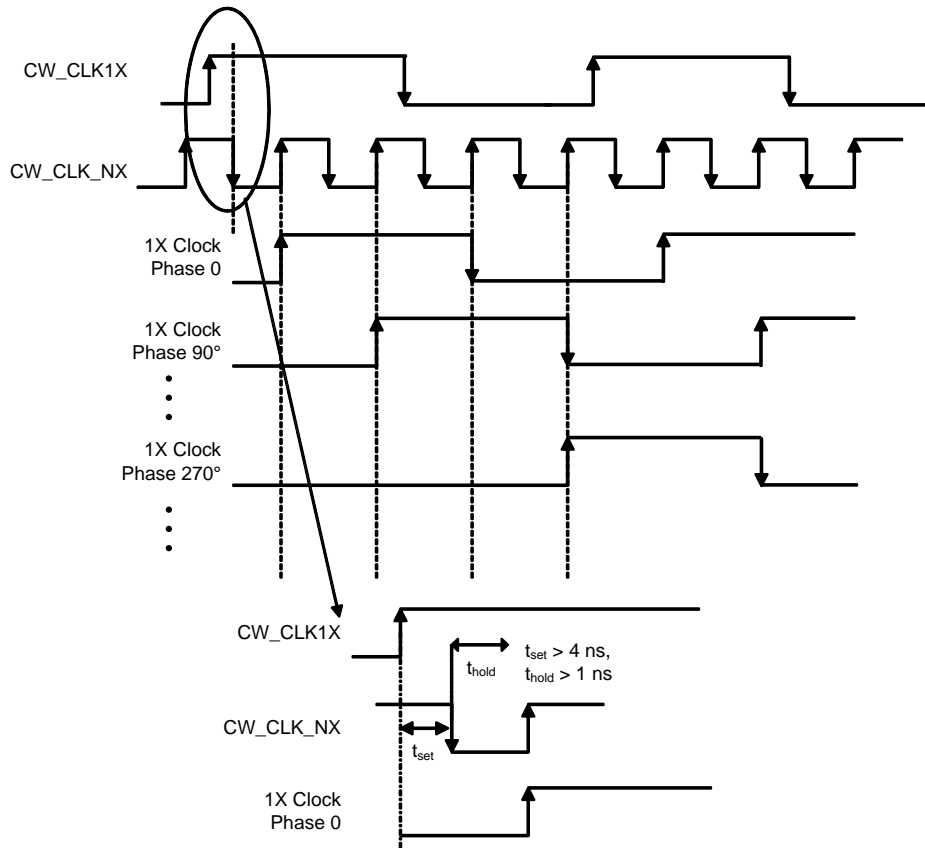


Figure 80.  $8 \times f_{cw}$  and  $4 \times f_{cw}$  Timing Diagram

### 9.3.6.3 $1 \times f_{cw}$ Mode

The  $1 \times f_{cw}$  mode requires in-phase and quadrature clocks with low-phase noise specifications. A block diagram for this mode is shown in Figure 81. Here again, the intermediate phases can be obtained through appropriate weighting and combining of the I- and Q- signals, as described in the  $8 \times f_{cw}$  and  $4 \times f_{cw}$  Modes section.

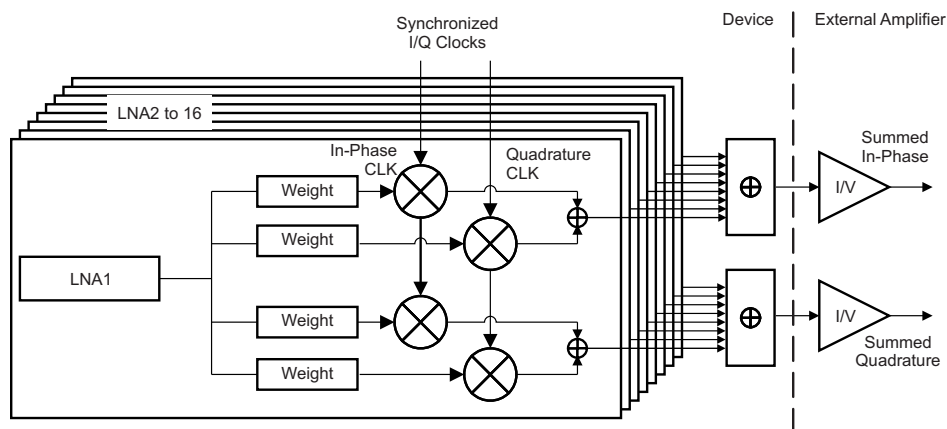


Figure 81.  $1 \times f_{cw}$  Mode Block Diagram



### 9.3.6.4 CW Clock Selection

For the CW clocks, the device can accept differential LVDS, LVPECL, and other differential clock inputs as well as a single-ended CMOS clock. An internally-generated  $V_{CM}$  of 1.5 V is applied to CW clock inputs (that is, CW\_CLK\_NX and CW\_CLK1X). Because this 1.5-V  $V_{CM}$  is different from the one used in standard LVDS or LVPECL clocks, ac coupling is required between clock drivers and the device CW clock inputs. When the CMOS clock is used, tie CLKM\_1X and CLKM\_16X either to ground or leave CLKM\_1X floating. Common clock configurations are shown in Figure 82. Appropriate termination is recommended to achieve good signal integrity.

#### NOTE

The configurations shown in Figure 82 can also be used as a reference for the ADC clock input.

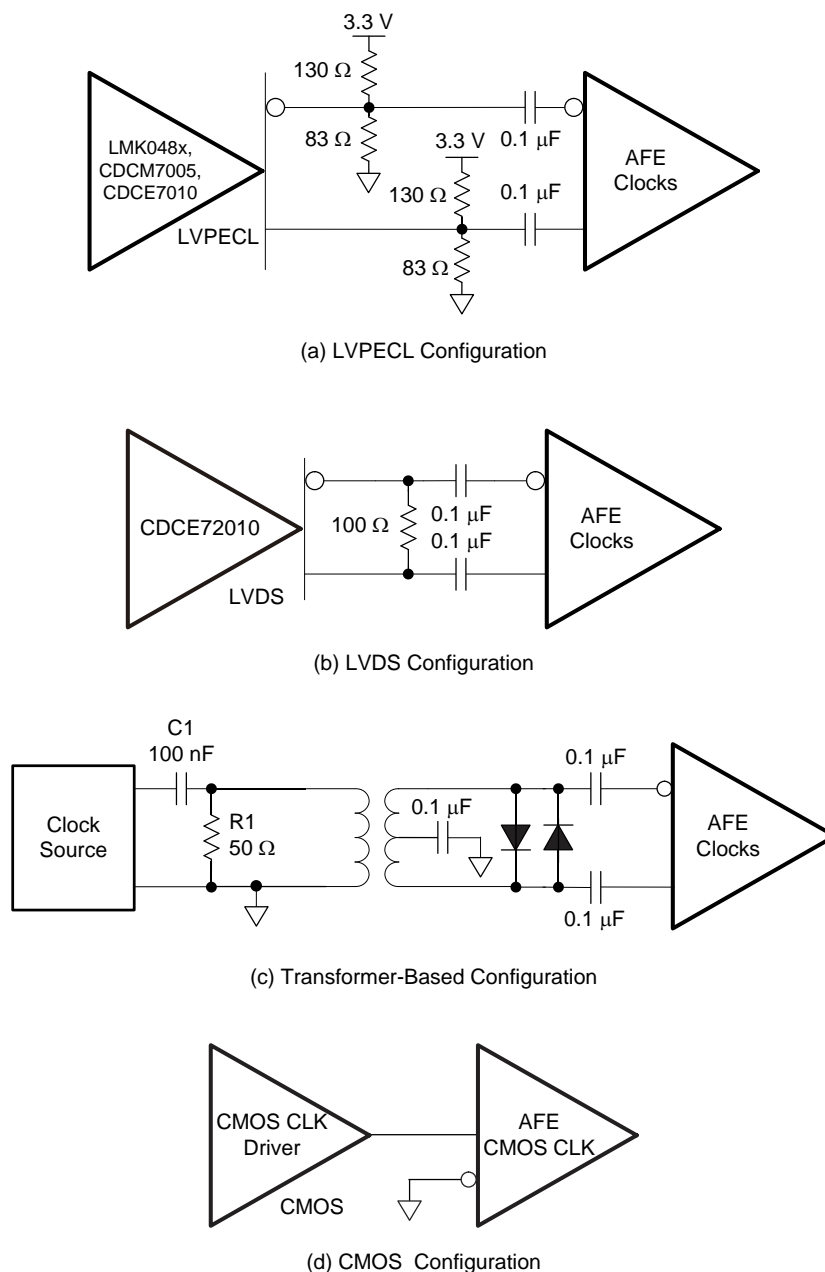


Figure 82. Clock Configurations

The combination of the clock noise and the CW path noise can degrade CW performance. The internal clocking circuit is designed for achieving excellent phase noise required by CW operation. The phase noise of the mixer clock inputs must be better than the phase noise of the CW path.

In the  $16$ ,  $8$ , and  $4 \times f_{CW}$  operation modes, a low-phase noise clock is required for the  $16$ ,  $8$ , and  $4 \times f_{CW}$  clocks (that is, the  $CW\_CLK\_NX$ ) in order to maintain good CW phase noise performance. The  $1 \times f_{CW}$  clock is only used to synchronize multiple device chips and is not used for demodulation. Thus, the  $1 \times f_{CW}$  clock phase noise is not a concern. However, in the  $1 \times f_{CW}$  operation mode, low-phase noise clocks are required for both the  $CLKP\_16X$ ,  $CLKM\_16X$  and  $CLKP\_1X$ ,  $CLKM\_1X$  pins because both pins are used for mixer demodulation. In general, a higher slew rate clock has lower phase noise. Thus, clocks with high amplitude and fast slew rate are preferred in CW operation.

Internal to the device, there is a division of the  $Nx$  clock (for example,  $N = 16, 8, \text{ or } 4$ ) to generate  $LO(t)$ . A clock division results in improvement of the phase noise. The phase noise of a divided clock can be improved approximately by a factor of  $20\log N$  dB, where  $N$  is the dividing factor of  $16, 8, \text{ or } 4$ . If the target phase noise of the mixer LO clock  $1 \times f_{CW}$  is  $160$  dBc/Hz at a 1-kHz off the carrier, the  $16 \times f_{CW}$  clock phase noise must be greater than  $(160 - 20\log 16 = 136)$  dBc/Hz. TI's jitter cleaners ([LMK048x](#), [CDCM7005](#), and [CDCE72010](#)) exceed this requirement and can be selected to work with the device. In the  $4X$  and  $1X$  modes, higher-quality input clocks are expected to achieve the same performance because  $N$  is smaller. Thus, the  $16X$  mode is a preferred mode because this mode reduces the phase noise requirement for the system clock design.

Note that in the  $16X$  operation mode, the CW operation range is limited to  $8$  MHz as a result of the  $16X$  clock. The maximum clock frequency for the  $16X$  clock is  $128$  MHz. In the  $8X, 4X, \text{ and } 1X$  modes, higher CW signal frequencies up to  $15$  MHz can be supported with a degradation in performance. For example, the phase noise is degraded by  $9$  dB at  $15$  MHz, compared to  $2$  MHz.

As the channel number in a system increases, clock distribution becomes more complex. Using one clock driver output is not preferred to drive multiple AFEs because the clock buffer load capacitance increases by a factor of  $N$  ( $N$  is the number of AFEs in a system). See the [System Clock Configuration for Multiple Devices](#) section for further details of the system clock configuration. When clock phase noise is not a concern (for example, the  $1 \times f_{CW}$  clock in the  $16, 8, \text{ and } 4 \times f_{CW}$  operation modes), one clock driver output can excite more than one device. Nevertheless, special considerations must be applied for such a clock distribution network design. Preferably, all clocks are generated from the same clock source in typical ultrasound systems (such as  $16 \times f_{CW}$  and  $1 \times f_{CW}$  clocks, audio ADC clocks, RF ADC clocks, pulse repetition frequency signals, frame clocks, and so on). By using the same clock source, interference resulting from clock asynchronization can be minimized.

### 9.3.6.5 CW Supporting Circuits

As a general practice in the CW circuit design, in-phase and quadrature channels must be strictly symmetrical by using well-matched layout and high-accuracy components. Additional high-pass wall filters ( $20$  Hz to  $500$  Hz) and low-pass audio filters ( $10$  kHz to  $100$  kHz) with multiple poles are usually required in ultrasound systems. Noise under this range is critical because the CW Doppler signal ranges from  $20$  Hz to  $20$  kHz. Consequently, low-noise audio operational amplifiers are suitable to build these active filters for CW post-processing (that is, the [OPA1632](#), [OPA2211](#), or [THS4131](#)). More filter design techniques can be found at [www.ti.com](http://www.ti.com). The TI active filter design tool is the [WEBENCH® Filter Designer](#). The filtered audio CW I/Q signals are sampled by audio ADCs and processed by the DSP or PC. Although the CW signal frequency is from  $20$  Hz to  $20$  kHz, higher sampling-rate ADCs are still preferred for further decimation and SNR enhancement. Because of the large dynamic range of CW signals, high-resolution ADCs ( $\geq 16$  bits) are required [such as the [ADS8413](#) ( $2$  MSPS,  $16$  bits,  $92$ -dBFS SNR) and the [ADS8472](#) ( $1$  MSPS,  $16$  bits,  $95$ -dBFS SNR)]. ADCs for in-phase and quadrature-phase channels must be strictly matched, not only for amplitude matching but also for phase matching in order to achieve the best I/Q matching. In addition, the in-phase and quadrature ADC channels must be sampled simultaneously.

### 9.3.7 Analog-to-Digital Converter (ADC)

The device supports a high-performance, 14-bit ADC that achieves 72-dBFS SNR. This ADC ensures excellent SNR at low-chain gain. The ADC can operate at maximum speeds of 65 MSPS and 80 MSPS, providing a 14-bit and a 12-bit output, respectively. The low-voltage differential signaling (LVDS) outputs of the ADC enable a flexible system integration that is desirable for miniaturized systems. In the following sections, a full description of all inputs and outputs of the ADC with different configurations are provided along with suitable examples.

#### NOTE

The ADC is part of the TGC signal chain. An ADC is not used in CW mode and can be powered down in this mode using the appropriate register controls.

#### 9.3.7.1 System Clock Input

The 16 channels on the device operate from a single clock input. To ensure that the aperture delay and jitter are the same for all channels, the device uses a clock tree network to generate individual sampling clocks for each channel. The clock lines for all channels are matched from the source point to the sampling circuit for each of the 16 internal ADCs. The delay variation is described by the aperture delay parameter of the [Output Interface Timing Characteristics](#) table. Variation over time is described by the aperture jitter parameter of the [Output Interface Timing Characteristics](#) table.

This system clock input can be driven differentially (sine wave, LVPECL, or LVDS) or single-ended (LVCMOS). The device clock input has an internal buffer and clock amplifier (as shown in [Figure 83](#)) that are enabled or disabled automatically, depending on the type of clock provided (auto-detect feature).


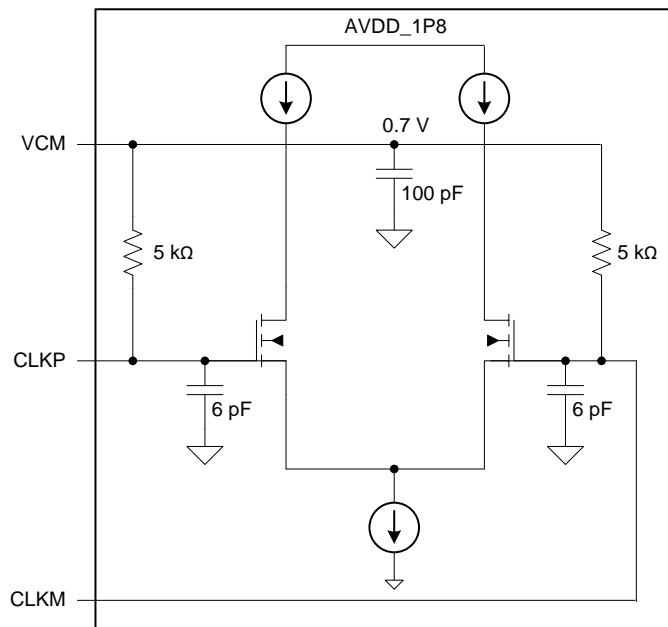


Figure 83. Internal Clock Buffer for Differential Clock Mode


If the preferred clocking scheme for the device is single-ended, connect the single-ended clock to ADC\_CLKP and connect the ADC\_CLKM pin to ground (in other words, short ADC\_CLKM directly to AVSS, as shown in [Figure 84](#)). In this case, the auto-detect feature shuts down the internal clock buffer and the device automatically goes into a single-ended clock mode. Connect the single-ended clock source directly (without decoupling) to the ADC\_CLKP pin. Low-jitter, square signals (LVCMOS levels, 1.8-V amplitude) are recommended to drive the ADC in single-ended clock mode (refer to technical brief [SLYT075](#) for further details).

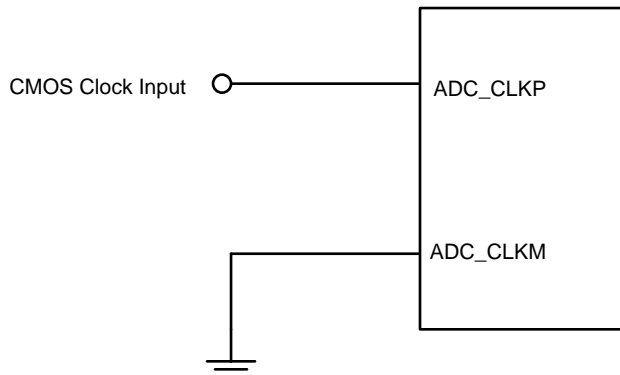

**Figure 84. Single-Ended Clock Driving Circuit**

For single-ended sinusoidal clocks, or for differential clocks (such as differential sine wave, LVPECL, LVDS, and so forth), enable the clock amplifier with the connection scheme shown in [Figure 85](#). The 10-nF capacitor used to ac-couple the clock input is as shown in [Figure 85](#).

If a transformer is used with the secondary coil floating (for instance, to convert from single-ended to differential), the transformer can be connected directly to the clock inputs without requiring the 10-nF series capacitors, provided that center tap of the transformer is either floating or ac-grounded.

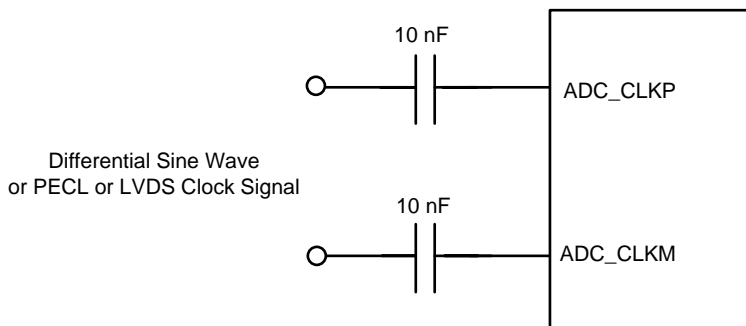

**Figure 85. Differential Clock Driving Circuit**

9.3.7.2 System Clock Configuration for Multiple Devices

To ensure that the aperture delay and jitter are the same for all channels, the device uses a clock tree network to generate individual sampling clocks for each channel. For all channels, the clock is matched from the source point to the sampling circuit of each of the eight internal devices. The variation on this delay is described in the *Aperture Delay* parameter of the *Output Interface Timing Characteristics* table. Variation is described by the aperture jitter parameter of the *Output Interface Timing Characteristics* table.

Figure 86 shows a clock distribution network.


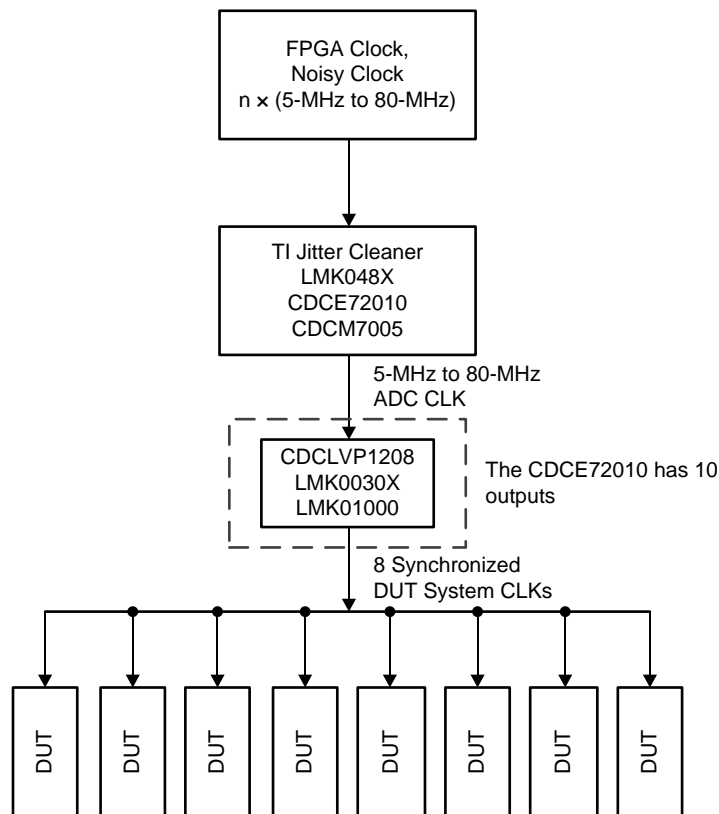


Figure 86. System Clock Distribution Network

**9.3.8 LVDS Interface**

The device supports an LVDS output interface in order to transfer device digital data serially to an FPGA. The device has a total of 18 LVDS output lines. One of these pairs is a serial data clock, another pair is a data framing clock, and the remaining 16 pairs are dedicated for data transfer. A graphical representation of the LVDS output is shown in [Figure 87](#).

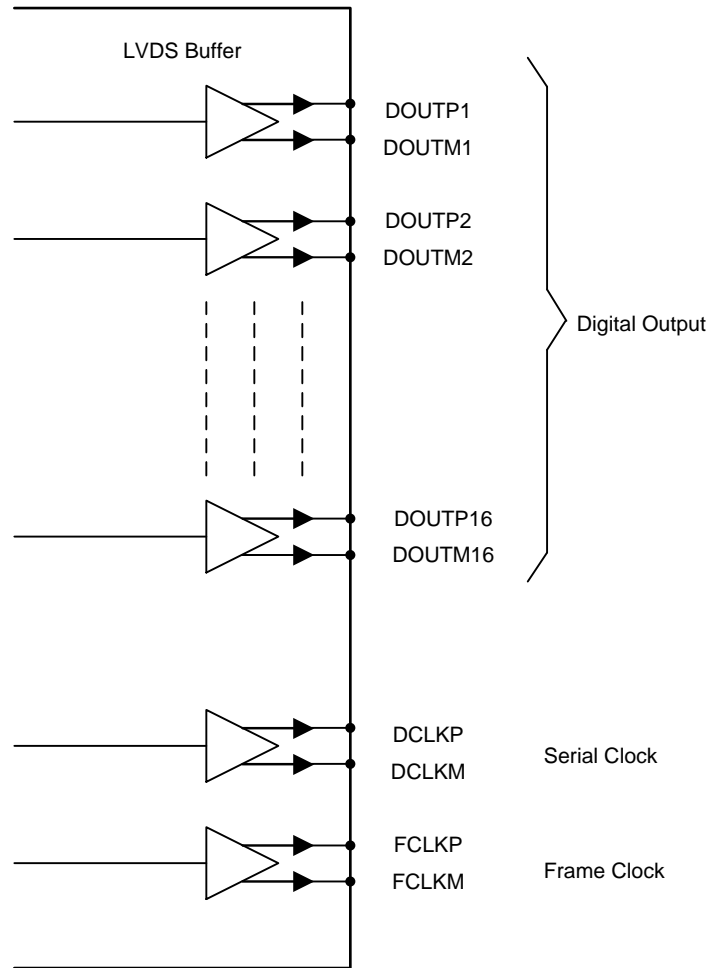

**Figure 87. LVDS Output**

### 9.3.8.1 LVDS Buffer

The equivalent circuit of each LVDS output buffer is shown in Figure 88. The buffer is designed for a normal output impedance of  $100\ \Omega$  ( $R_{OUT}$ ). Terminate the differential outputs at the receiver end by a  $100\text{-}\Omega$  termination. The buffer output impedance functions like a source-side series termination. By absorbing reflections from the receiver end, the buffer output impedance helps improve signal integrity. Note that this internal termination cannot be disabled nor can its value be changed.

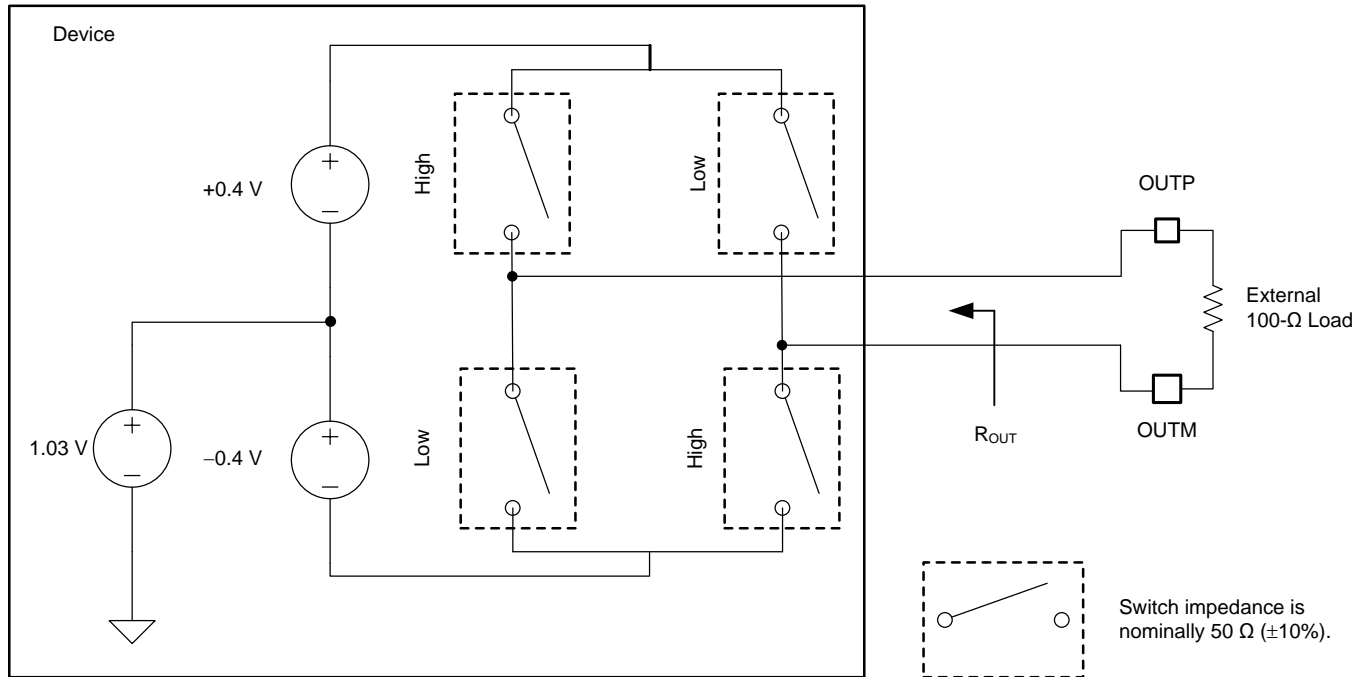



Figure 88. LVDS Output Circuit

### 9.3.8.2 LVDS Data Rate Modes

The LVDS interface supports two data rate modes, as described in this section.

#### 9.3.8.2.1 1X Data Rate Mode

In 1X data rate mode, each LVDS output carries data from a single ADC. Figure 89 and Figure 90 show the output data, serial clock, and frame clock LVDS lines for the 14-bit and 12-bit 1X mode, respectively.

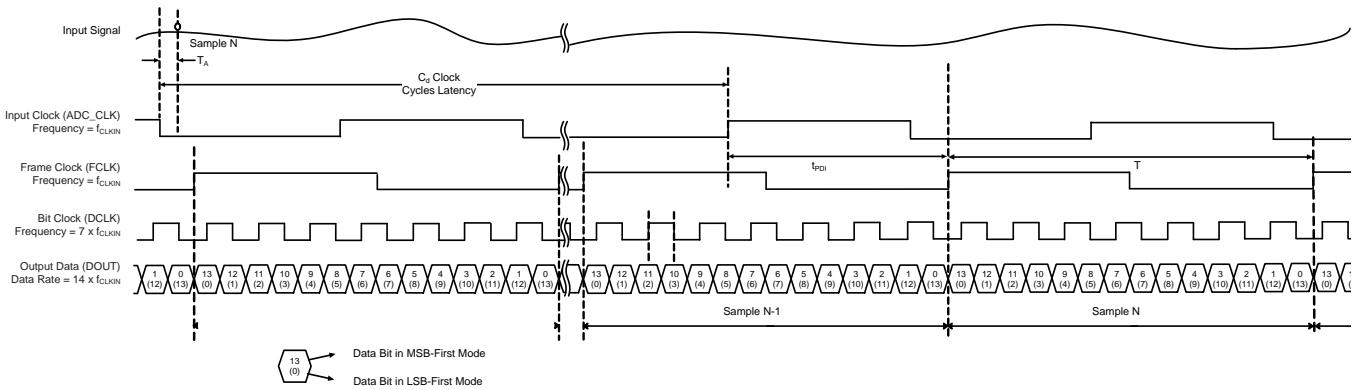

(1) K = ADC resolution.

Figure 89. 14-Bit, 1X Data Rate Output Timing Specification

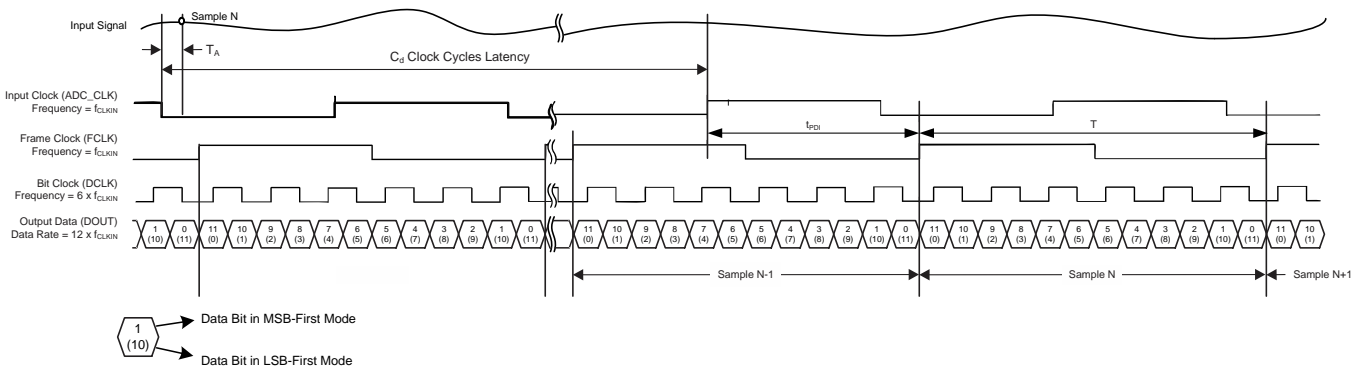


Figure 90. 12-Bit, 1X Data Rate Output Timing Specification

#### 9.3.8.2.2 2X Data Rate Mode

In 2X data rate mode, only half of the LVDS lines are used to transfer data. Thus, this mode is useful for saving power when lower sampling frequency ranges permit. This mode is enabled with the LVDS\_RATE\_2X register bit (register 1, bit 14). After enabling this mode, the digital data from two ADCs are transmitted with a single LVDS lane. When compared to the 1X data rate mode, the 2X data rate mode serial clock frequency is doubled, but the frame clock frequency remains the same (for the same serialization factor and ADC resolution).

When the frame clock is high, data on DOUT1 correspond to channel 1, data on DOUT2 correspond to channel 3, and so forth. When the frame clock is low, DOUT1 transmits channel 2 data, DOUT2 transmits channel 4 data, and so forth.



Figure 91 and Figure 92 show a timing diagram for the 14-bit and 12-bit 2X mode, respectively. Channel and LVDS data line mapping for this mode are listed in Table 14. Note that idle LVDS lines are not powered down by default. To save power, these lines can be powered down using the corresponding power-down bits (PDN\_LVDSx).

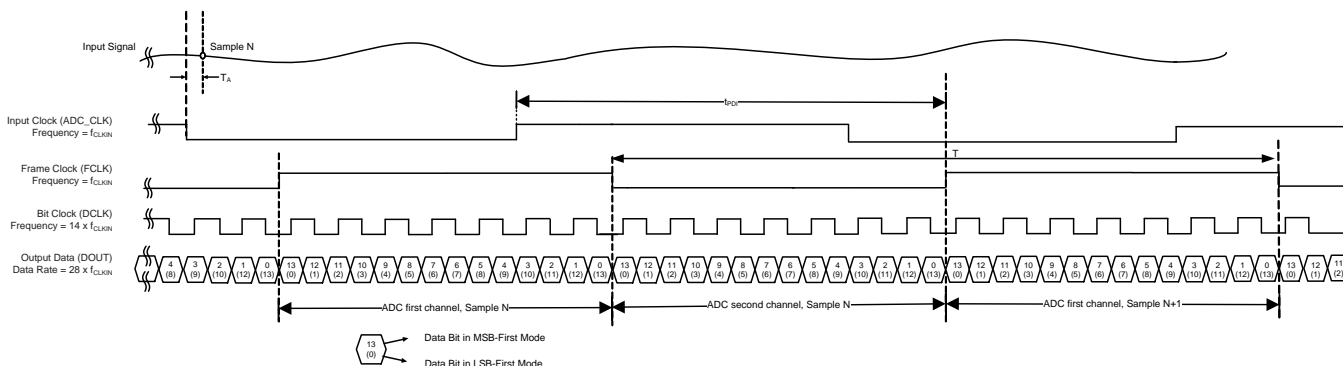


Figure 91. 14-Bit, 2X Data Rate Output Timing Specification

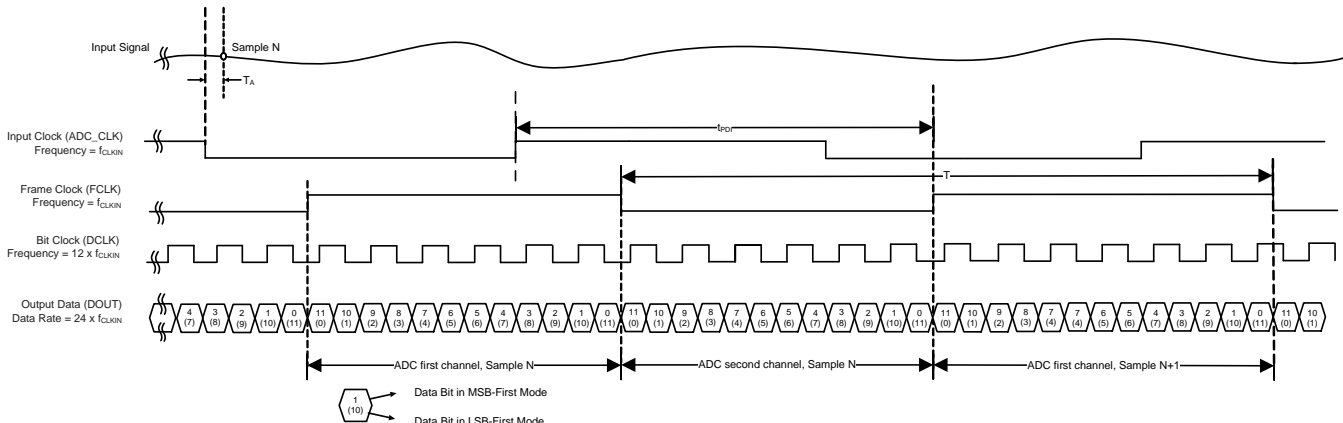


Figure 92. 12-Bit, 2X Data Rate Output Timing Specification


Table 14 illustrates which LVDS output lines are active in 2X data rate mode. The idle channels can be powered down using appropriate register controls.

**Table 14. Channel and ADC Data Line Mapping (2X Rate)**

CHANNELS	MAPPING
DOUT1	ADC data for channels 1 and 2
DOUT2	ADC data for channels 3 and 4
DOUT3	ADC data for channels 5 and 6
DOUT4	ADC data for channels 7 and 8
DOUT5	Idle
DOUT6	Idle
DOUT7	Idle
DOUT8	Idle
DOUT9	ADC data for channels 9 and 10
DOUT10	ADC data for channels 11 and 12
DOUT11	ADC data for channels 13 and 14
DOUT12	ADC data for channels 15 and 16
DOUT13	Idle
DOUT14	Idle
DOUT15	Idle
DOUT16	Idle

**9.3.9 ADC Register, Digital Processing Description**

The ADC has extensive digital processing functionalities that can be used to enhance ADC output performance. The digital processing blocks are arranged as shown in [Figure 93](#).

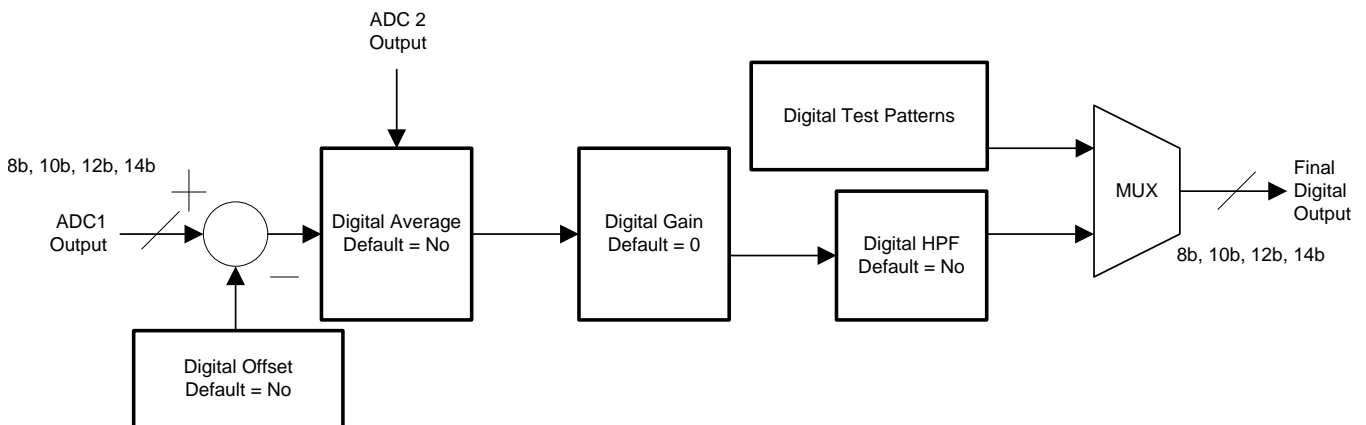

**Figure 93. ADC Digital Block Diagram**

### 9.3.9.1 Digital Offset

Digital functionality provides for channel offset correction. Setting the DIG\_OFFSET\_EN bit to 1 enables the subtraction of the offset value from the ADC output. There are two offset correction modes, as shown in Figure 94.

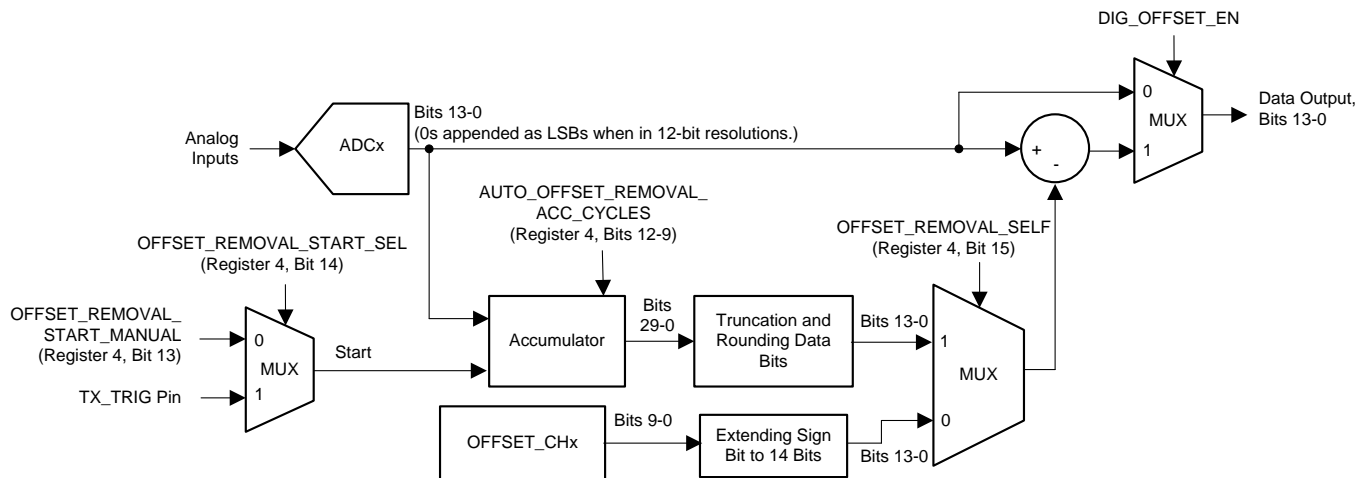


Figure 94. Digital Offset Correction Block Diagram

#### 9.3.9.1.1 Manual Offset Correction

If the channel offset is known, the appropriate value can be written in the OFFSET\_CHx register for channel x. The offset value programmed in the OFFSET\_CHx register subtracts out from the ADC output. The offset of each of the 16 ADC output channels can be independently programmed. The same offset value must be programmed into two adjacent offset registers. For instance, when programming the channel 1 offset value 0000011101, write the same offset value of 0000011101 in registers 13 (bits 9-0) and 14 (bits 9-0). The offset values are to be written in two's complement format.

**9.3.9.1.2 Auto Offset Correction Mode (Offset Correction using a Built-In Offset Calculation Function)**

The auto offset calculation module can be used to calculate the channel offset that is then subtracted from the ADC output. To enable the auto offset correction mode, set the OFFSET\_REMOVAL\_SELF bit to 0.

In auto offset correction mode, the dc component of the ADC output (assumed to be the channel offset) is estimated using a digital accumulator. The ADC output sample set used by the accumulator is determined by a start time or by the first sample and number of samples to be used. [Figure 94](#) illustrates the options available to determine the accumulator sample set. A high pulse on the TX\_TRIG pin or setting the OFFSET\_REMOVAL\_START\_MANUAL register can be used to determine the accumulator first sample. To set the number of samples, the AUTO\_OFFSET\_REMOVAL\_ACC\_CYCLES register (bits 12-9) must be programmed according to [Table 15](#).

If a pulse on the TX\_TRIG pin is used to set the first sample, additional flexibility in setting the first sample is provided. A programmable delay between the TX\_TRIG pulse and first sample can be set by writing to the OFFSET\_CORR\_DELAY\_FROM\_TX\_TRIG register.

The determined offset value can be read out channel-wise. Set the channel number in the AUTO\_OFFSET\_REMOVAL\_VAL\_RD\_CH\_SEL register and read the offset value for the corresponding channel in the AUTO\_OFFSET\_REMOVAL\_VAL\_RD register.

**Table 15. Auto Offset Removal Accumulator Cycles**

AUTO_OFFSET_REMOVAL_ACC_CYCLES (Bits 3-0)	NUMBER OF SAMPLES USED FOR OFFSET VALUE EVALUATION
0	2047
1	127
2	255
3	511
4	1023
5	2047
6	4095
7	8191
8	16383
9	32767
10 to 15	65535

### 9.3.9.2 Digital Average

The signal-to-noise ratio (SNR) of the signal chain can be improved by providing the same input signal to two channels and averaging their output digitally. To enable averaging, set the AVG\_EN register bit (register 2, bit 11). The way that data are transmitted on the digital output lines in this mode is described in [Table 16](#).

**Table 16. Channel and ADC Data Line Mapping (Averaging Enabled)**

CHANNELS	MAPPING
DOUT1	Average of channels 1 and 2
DOUT2	Average of channels 3 and 4
DOUT3	Average of channels 5 and 6 <sup>(1)</sup>
DOUT4	Average of channels 7 and 8 <sup>(1)</sup>
DOUT5	Idle
DOUT6	Idle
DOUT7	Idle
DOUT8	Idle
DOUT9	Average of channels 9 and 10
DOUT10	Average of channels 11 and 12
DOUT11	Average of channels 13 and 14 <sup>(1)</sup>
DOUT12	Average of channels 15 and 16 <sup>(1)</sup>
DOUT13	Idle
DOUT14	Idle
DOUT15	Idle
DOUT16	Idle

(1) Idle when AVG\_EN = 1 and when the LVDS data rate is set to 2X mode.

#### NOTE

Idle LVDS lines are not powered down by default. To save power, these lines can be powered down using the corresponding power-down bits (PDN\_LVDSx).

The serialization factor must be greater than the ADC resolution to obtain SNR improvement after averaging in 12b resolution.

### 9.3.9.3 Digital Gain

To enable the digital gain block, set DIG\_GAIN\_EN (register 3, bit 12) to 1. When enabled, the gain value for channel x (where x is from 1 to 16) can be set with the 4-bit register control for the corresponding channel (GAIN\_CHx). Gain is given as (0 dB + 0.2 dB × GAIN CHx). For instance, if GAIN\_CH5 = 3 (decimal equivalent of the 4-bit word), then channel 5 is increased by a 0.6-dB gain. GAIN\_CHx = 31 produces the same effect as GAIN\_CHx = 30, which sets the gain of channel x to 6 dB.

### 9.3.9.4 Digital HPF

To enable the digital high-pass filter (HPF) of channels 1 to 4, 5 to 8, 9 to 12, and 13 to 16, set the DIG\_HPF\_EN\_CH1-4, DIG\_HPF\_EN\_CH5-8, DIG\_HPF\_EN\_CH9-12, and DIG\_HPF\_EN\_CH13-16, respectively.

The HPF\_CORNER\_CHxy register bits (where xy are 1-4, 5-8, 9-12, or 13-16) control the characteristics of a digital high-pass transfer function applied to the output data, based on [Equation 10](#). These bits correspond to bits 4-1 in registers 21, 33, 45, and 57, respectively (these register settings describe the value of K). The valid values of K are 2 to 10. The digital HPF can be used to suppress low-frequency noise. [Table 17](#) describes the cutoff frequency versus K.

$$Y(n) = \frac{2^k}{2^k + 1} [x(n) - x(n - 1) + y(n - 1)] \quad (10)$$


**Table 17. Digital HPF, –1-dB Corner Frequency versus K and  $f_s$** 

CORNER FREQUENCY (k) (HPF_CORNER_CHxy Register)	CORNER FREQUENCY (kHz)		
	$f_s = 40$ MSPS	$f_s = 50$ MSPS	$f_s = 65$ MSPS
2	2780	3480	4520
3	1490	1860	2420
4	738	230	1200
5	369	461	600
6	185	230	300
7	111	138	180
8	49	61	80
9	25	30	40
10	12.	15	20

The HPF output is mapped to the ADC resolution bits either by truncation or a round-off operation. By default, the HPF output is truncated to map to the ADC resolution. To enable the rounding operation to map the HPF output to the ADC resolution, set the HPF\_ROUND\_EN\_CH1-8 and HPF\_ROUND\_EN\_CH9-16 bits to 1.

### 9.3.9.5 LVDS Synchronization Operation

Different test patterns can be synchronized on the LVDS serialized output lines to help set and program the FPGA timing that receives the LVDS serial output. Of these test patterns, the ramp, toggle, and pseudo-random sequence (PRBS) test patterns can be reset or synchronized by providing a synchronization pulse on the TX\_TRIG pin or by setting and resetting a specific register bit. The synchronization pulse on the TX\_TRIG pin must meet the setup and hold time constraints with respect to the system clock, as shown in Figure 95. Parameter values are listed in the [Output Interface Timing Requirements](#) table.

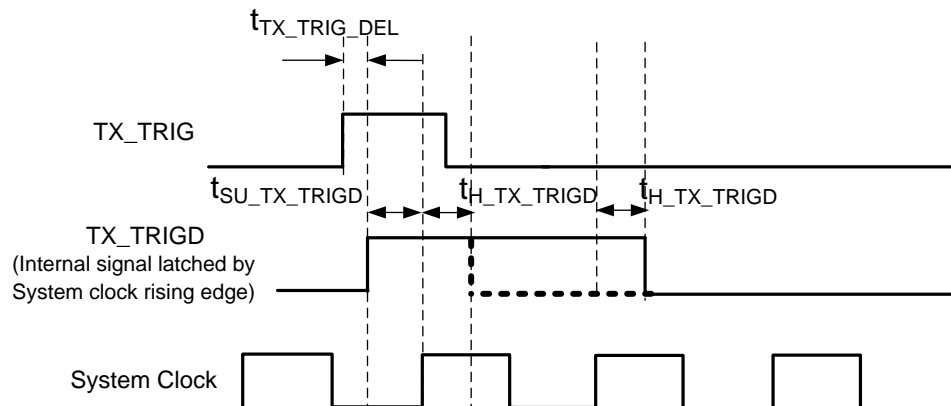
**Figure 95. Setup and Hold Time Constraint for the TX\_TRIG Signal**

ADC data may be corrupted for four to six clocks immediately after applying TX\_TRIG. The phase reset from TX\_TRIG can be disabled using MASK\_TX\_TRIG.

### 9.3.10 Power Management

Power management plays a critical role to extend battery life and to ensure a long operation time. The device has a fast and flexible power-up and power-down control that can maximize battery life. The device can be either powered down or up through external pins or internal registers.

This section describes the functionality of different power-down pins and register bits available in the device. The device can be divided in two major blocks: the VCA and ADC; see [Figure 96](#) and [Figure 97](#).

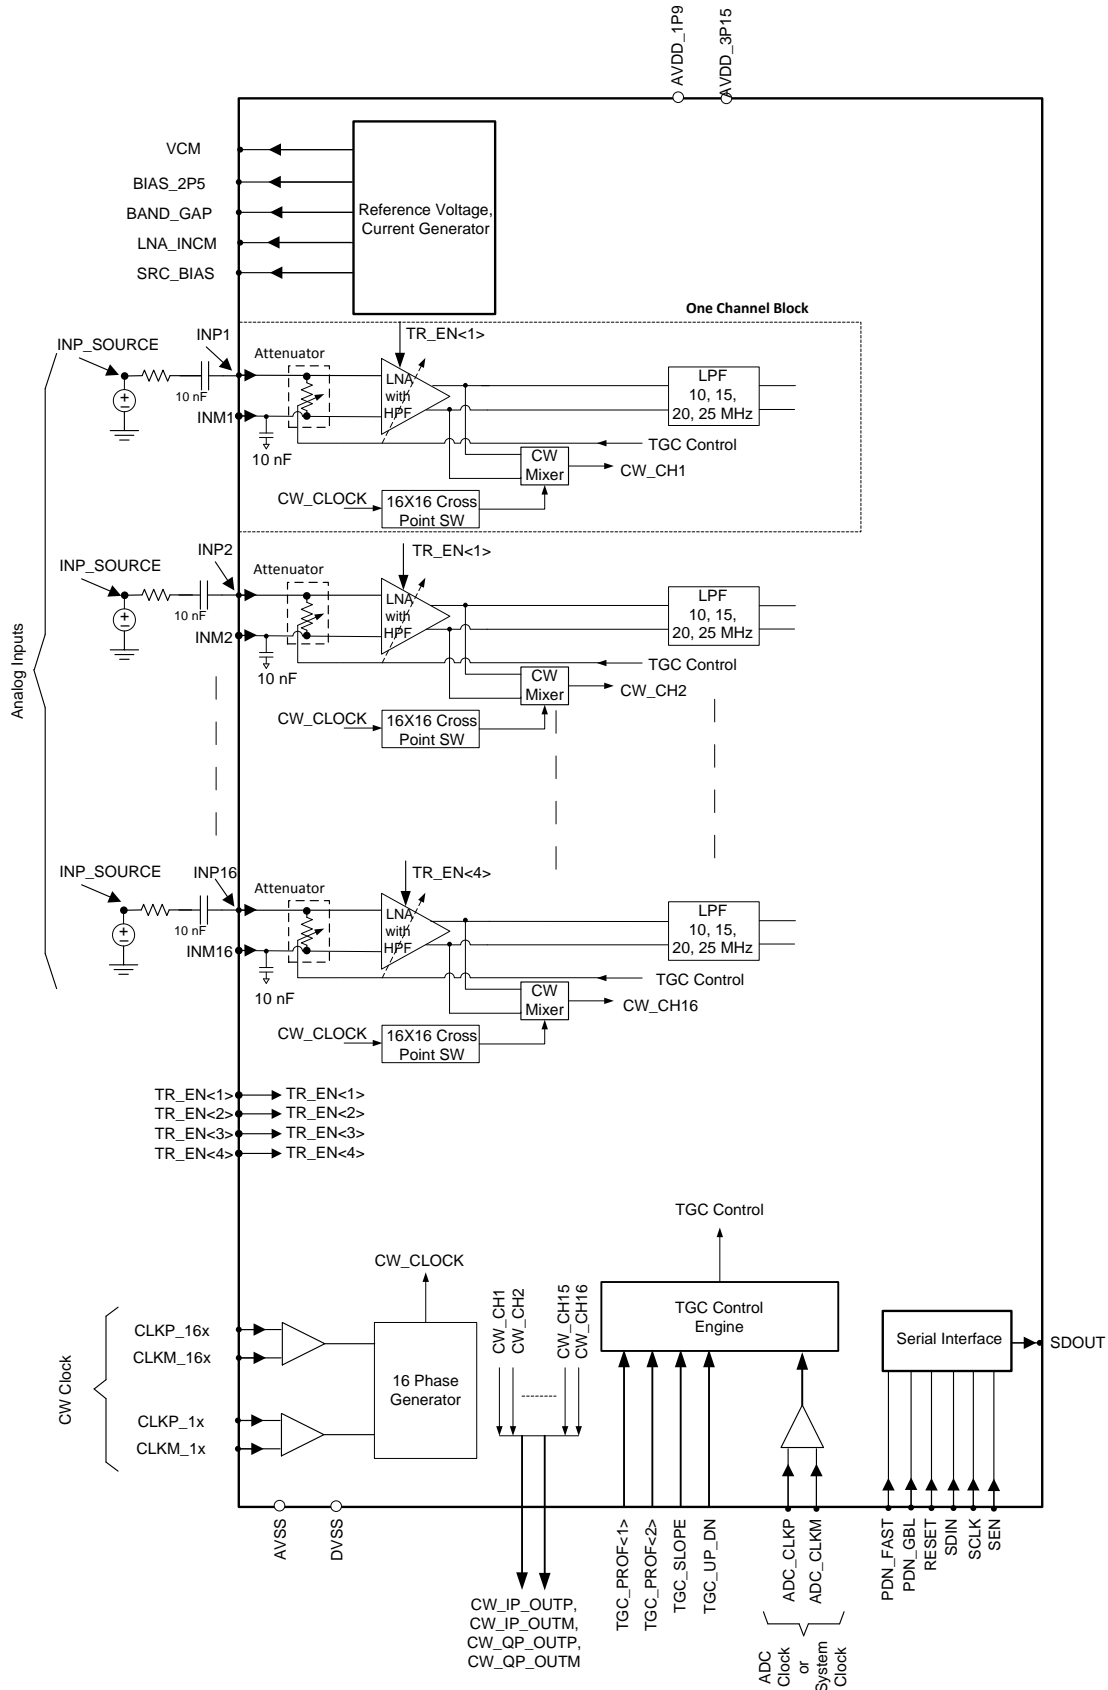


Figure 96. VCA Block Diagram

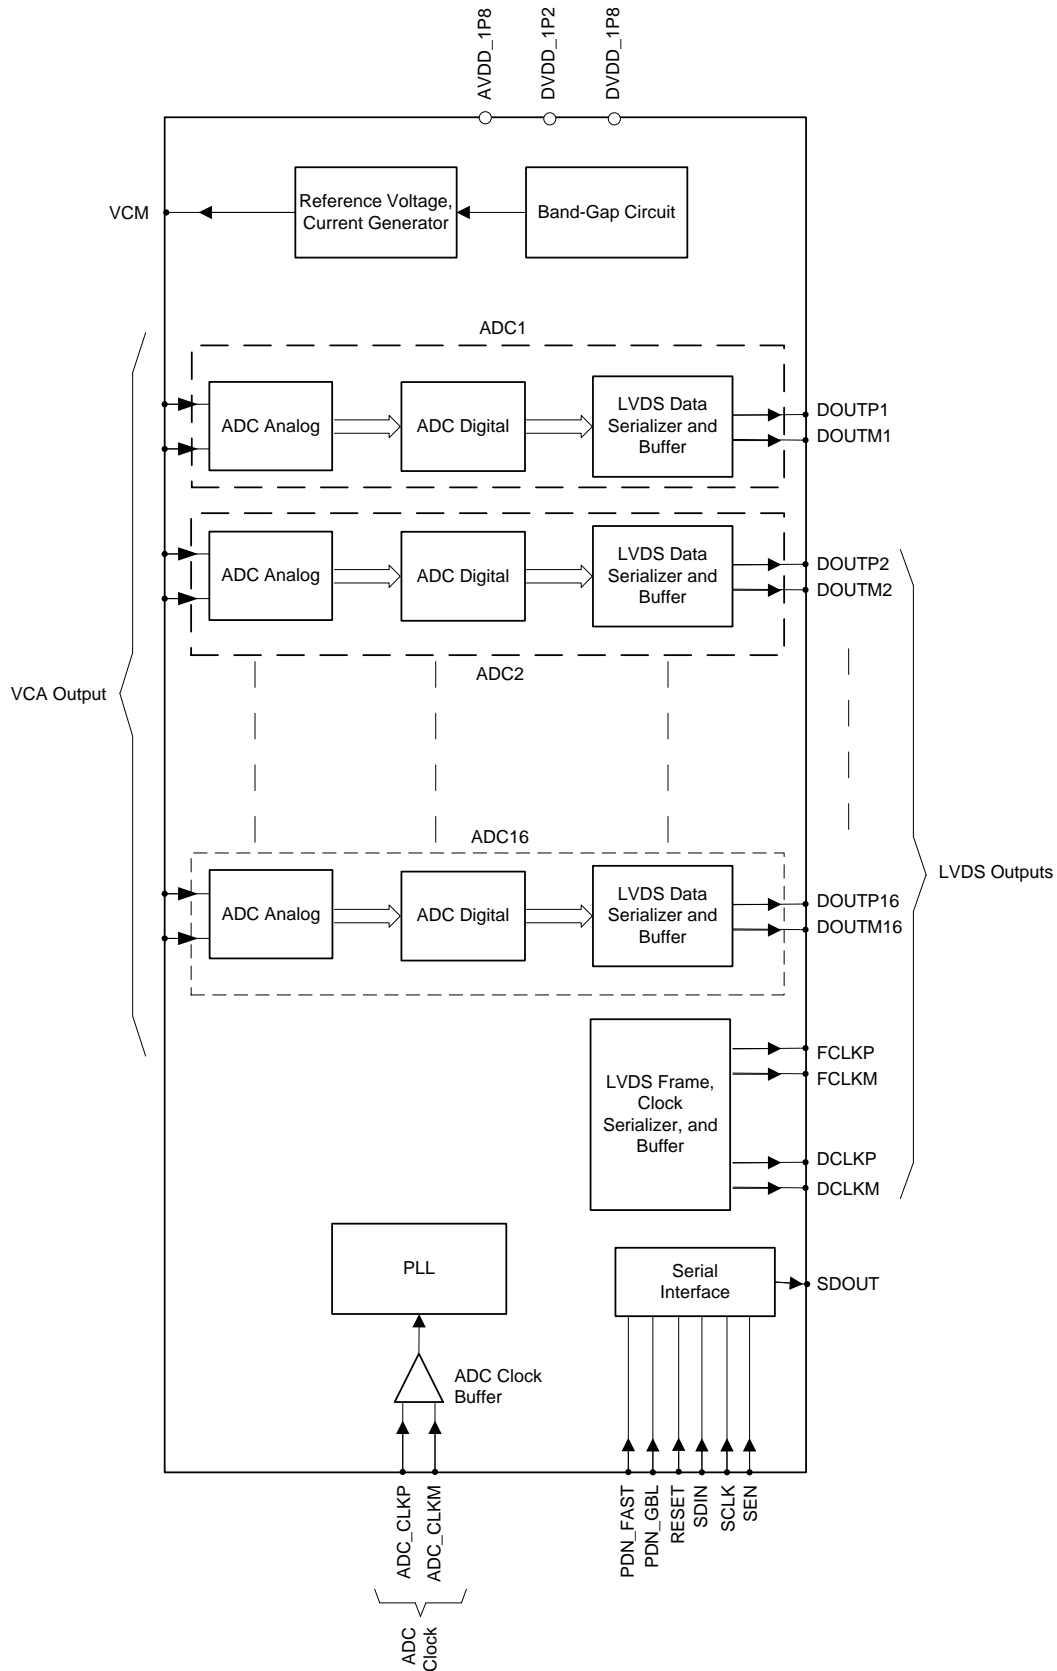


Figure 97. ADC Block Diagram



### 9.3.10.1 Voltage-Controlled Attenuator (VCA) Power Management

The VCA consists of the following blocks:

- Band-gap circuit,
- Serial interface,
- Reference voltage and current generator,
- A total of 16 channel blocks (each channel block includes an attenuator, LNA, LPF, CW mixer, and a 16 × 16 cross-point switch),
- TGC control engine, and
- Phase generator for CW mode.

Of these VCA blocks, the band-gap, attenuator, and serial interface block cannot be powered down by using power-down pins or bits. [Table 18](#) lists all the VCA blocks that are powered down using various pin and bit settings.

**Table 18. VCA Power-Down Mode Descriptions**

NAME	TYPE (Pin or Register)	LNA	LPF	CW MIXER	16 × 16 CROSS-POINT SWITCH	TGC CONTROL ENGINE	REFERENCE	PHASE GENERATOR	CHANNEL
PDN_GBL	Pin	Yes <sup>(1)</sup>	Yes	Yes	Yes	Yes	Yes	Yes	All <sup>(2)</sup>
GBL_PDWN	Register	Yes	Yes	Yes	Yes	Yes	Yes	Yes	All
PDN_FAST	Pin	Yes	Yes	Yes	Yes	No	No	Yes	All
FAST_PDWN	Register	Yes	Yes	Yes	Yes	No	No	Yes	All
PDCHxx	Register	Yes	Yes	Yes	Yes	No	No	No	Individual
PDWN_LNA	Register	Yes	No	No	No	No	No	No	All
PDWN_FILTER	Register	No	Yes	No	No	No	No	No	All

(1) Yes = powered down; no = active.

(2) All = all channels are powered down; individual = only a single channel is powered down, depending upon the corresponding bit.

If more than one bit is simultaneously enabled, then all blocks listed as Yes for each bit setting are powered down.

### 9.3.10.2 Analog-to-Digital Converter (ADC) Power Management

The ADC consists of the following blocks:

- Band-gap circuit,
- Serial interface,
- Reference voltage and current generator,
- ADC analog block that performs a sampling and conversion,
- ADC digital block that includes all the digital post processing blocks (such as the offset, gain, digital HPF, and so forth),
- LVDS data serializer and buffer that converts the ADC parallel data to a serial stream,
- LVDS frame and clock serializer and buffer, and
- PLL (phase-locked loop) that generates a high-frequency clock for both the ADC and serializer.

Of all these blocks, only the band-gap and serial interface block cannot be powered down using power-down pins or bits. [Table 19](#) lists which blocks in the ADC are powered down using different pins and bits.

**Table 19. Power-Down Modes Description for the ADC**

NAME	TYPE (Pin or Register)	ADC ANALOG	ADC DIGITAL	LVDS DATA SERIALIZER, BUFFER	LVDS FRAME AND CLOCK SERIALIZER, BUFFER	REFERENCE + ADC CLOCK BUFFER	PLL	CHANNEL
PDN_GBL	Pin	Yes <sup>(1)</sup>	Yes	Yes	Yes	Yes	Yes	All <sup>(2)</sup>
GLOBAL_PDN	Register	Yes	Yes	Yes	Yes	Yes	Yes	All
PDN_FAST	Pin	Yes	Yes	Yes	No	No	No	All
DIS_LVDS	Register	No	No	Yes	Yes	No	No	All
PDN_ANA_CHx	Register	Yes	No	No	No	No	No	Individual
PDN_DIG_CHx	Register	No	Yes	No	No	No	No	Individual
PDN_LVDSx	Register	No	No	Yes	No	No	No	Individual

(1) Yes = powered down; no = active.

(2) All = all channels are powered down; individual = only a single channel is powered down, depending upon the corresponding bit.

## 9.4 Device Functional Modes

### 9.4.1 ADC Test Pattern Mode

#### 9.4.1.1 Test Patterns

##### 9.4.1.1.1 LVDS Test Pattern Mode

The ADC data coming out of the LVDS outputs can be replaced by different kinds of test patterns. The different test patterns are described in [表 20](#).

**表 20. Description of LVDS Test Patterns**

TEST PATTERN MODE	PROGRAMMING THE MODE		TEST PATTERNS REPLACE <sup>(1)</sup>
	THE SAME PATTERN MUST BE COMMON TO ALL DATA LINES (DOUT)	THE PATTERN IS SELECTIVELY REQUIRED ON ONE OR MORE DATA LINE (DOUT)	
All 0s	Set the mode using PAT_MODES[2:0]	Set PAT_SELECT_IND = 1. To output the pattern on the DOUTx line, select PAT_LVDSx[2:0]	Zeros in all bits (00000000000000)
All 1s	Set the mode using PAT_MODES[2:0]	Set PAT_SELECT_IND = 1. To output the pattern on the DOUTx line, select PAT_LVDSx[2:0]	Ones in all bits (11111111111111)
Deskew	Set the mode using PAT_MODES[2:0]	Set PAT_SELECT_IND = 1. To output the pattern on the DOUTx line, select PAT_LVDSx[2:0]	The ADC data is replaced by alternate 0s and 1s (01010101010101)
Sync	Set the mode using PAT_MODES[2:0]	Set PAT_SELECT_IND = 1. To output the pattern on the DOUTx line, select PAT_LVDSx[2:0]	ADC data are replaced by half 1s and half 0s (11111110000000)
Custom	Set the mode using PAT_MODES[2:0]. Set the desired custom pattern using the CUSTOM_PATTERN register control.	Set PAT_SELECT_IND = 1. To output the pattern on the DOUTx line, select PAT_LVDSx[2:0]	The word written in the CUSTOM_PATTERN control (taken from the MSB side) replaces ADC data. (For instance, CUSTOM_PATTERN = 1100101101011100 and ADC data = 11001011010111 when the serialization factor is 14.)

(1) Shown for a serialization factor of 14.

**Device Functional Modes (接下页)**
**表 20. Description of LVDS Test Patterns (接下页)**

TEST PATTERN MODE	PROGRAMMING THE MODE		TEST PATTERNS REPLACE <sup>(1)</sup>
	THE SAME PATTERN MUST BE COMMON TO ALL DATA LINES (DOUT)	THE PATTERN IS SELECTIVELY REQUIRED ON ONE OR MORE DATA LINE (DOUT)	
Ramp	Set the mode using PAT_MODES[2:0]	Set PAT_SELECT_IND = 1. To output the pattern on the DOUTx line, select PAT_LVDSx[2:0]	The ADC data are replaced by a word that increments by 1 LSB every conversion clock starting at negative full-scale, increments until positive full-scale, and wraps back to negative full-scale. Step size of RAMP pattern is function of ADC resolution (N) and serialization factor (S) and given by $2^{(S-N)}$ .
Toggle	Set the mode using PAT_MODES[2:0]	Set PAT_SELECT_IND = 1. To output the pattern on the DOUTx line, select PAT_LVDSx[2:0]	The ADC data alternate between two words that are all 1s and all 0s. At each setting of the toggle pattern, the start word can either be all 0s or all 1s. (Alternate between 1111111111111111 and 0000000000000000.)
PRBS	Set SEL_PRBS_PAT_GBL = 1. Select either custom or ramp pattern with PAT_MODES[2:0]. Enable PRBS mode using PRBS_EN. Select the desired PRBS mode using PRBS_MODE. Reset the PRBS generator with PRBS_SYNC.	Set PAT_SELECT_IND = 1. Select either custom or ramp pattern with PAT_LVDSx[2:0]. Enable PRBS mode on DOUTx with the PAT_PRBS_LVDSx control. Select the desired PRBS mode using PRBS_MODE. Reset the PRBS generator with PRBS_SYNC.	A 16-bit pattern is generated by a 23-bit (or 9-bit) PRBS pattern generator (taken from the MSB side) and replaces the ADC data.

All patterns listed in 表 20 (except the PRBS pattern) can also be forced on the frame clock output line by using PAT\_MODES\_FCLK[2:0]. To force a PRBS pattern on the frame clock, use the SEL\_PRBS\_PAT\_FCLK, PRBS\_EN, and PAT\_MODES\_FCLK register controls.

The ramp, toggle, and pseudo-random sequence (PRBS) test patterns can be reset or synchronized by providing a synchronization pulse on the TX\_TRIG pin or by setting and resetting a specific register bit. A block diagram for the test patterns is provided in 图 98.

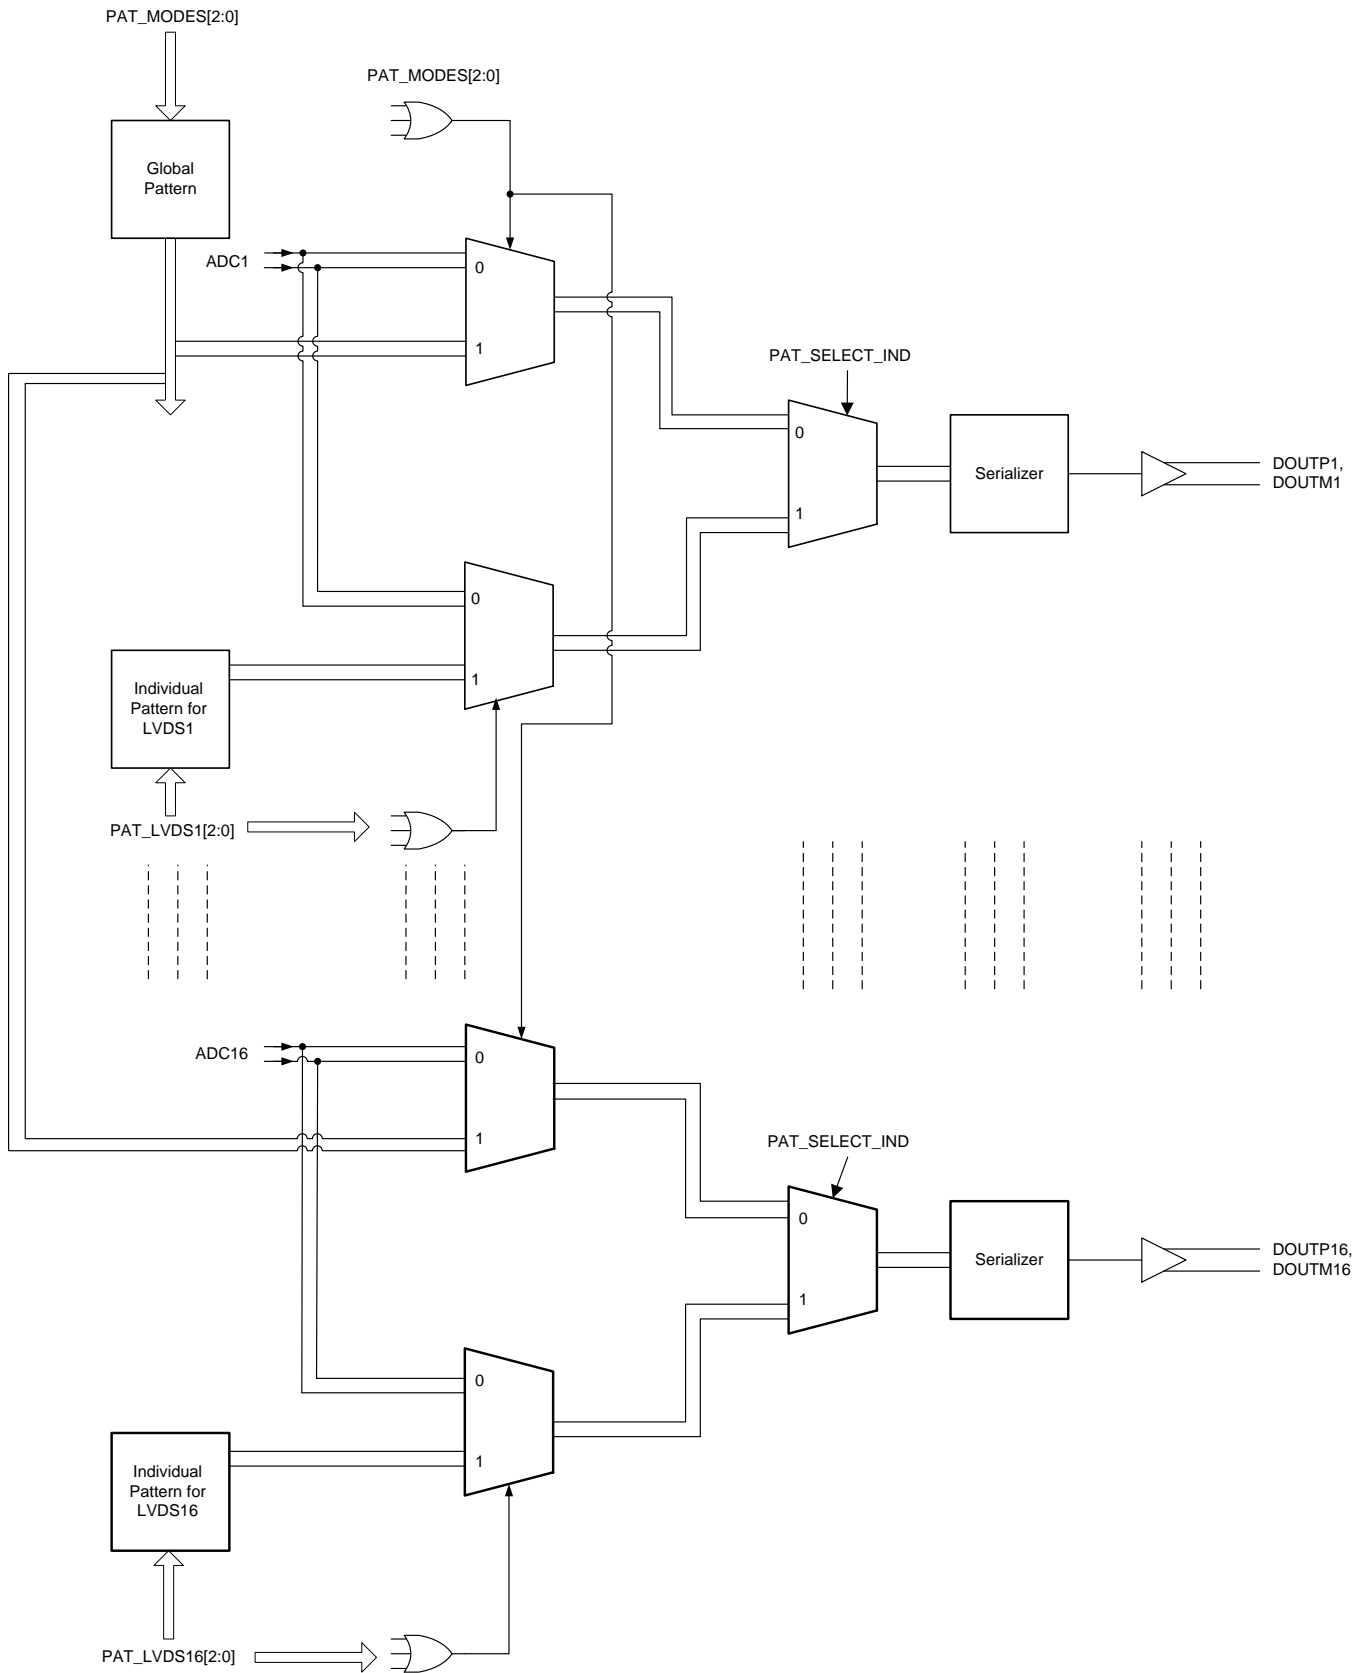


图 98. Test Pattern Block Diagram

### 9.4.2 Partial Power-Up and Power-Down Mode

The partial power-up and power-down mode is also called *fast power-up and power-down mode*. The VCA can be programmed in partial power-down mode either by setting the PDN\_FAST pin high or setting the FAST\_PDWN register bit to 1. Similarly, the ADC can be programmed in this mode by setting the PDN\_FAST pin high. In this mode, many blocks in the signal path are powered down. However, the internal reference circuits, LVDS frame, and data clock buffers remain active. The partial power-down function allows the device to quickly wake-up from a low-power state. This configuration ensures that the external capacitors are discharged slowly; thus, a minimum wake-up time is required as long as the charges on these capacitors are restored. The longest wake-up time depends on the capacitors connected at INP and INM, because the wake-up time is the time required to recharge the capacitors to the desired operating voltages. For larger capacitors, this time is longer. The ADC wake-up time is approximately 1  $\mu$ s. Thus, the device wake-up time is more dependent on the VCA wake-up time with the assumption that the ADC clock is running for at least 50  $\mu$ s before the normal operating mode resumes. The power-down time is instantaneous, less than 2  $\mu$ s. This fast wake-up response is desired for portable ultrasound applications where power savings is critical. The pulse repetition frequency (PRF) of an ultrasound system can vary from 50 kHz to 500 Hz, and the imaging depth (that is, the active period for a receive path) varies from tens of  $\mu$ s to hundreds of  $\mu$ s. The power savings can be quite significant when a system PRF is low. In some cases, only the VCA is powered down when the ADC runs normally to ensure minimal interference to the FPGAs; see the [Electrical Characteristics: TGC Mode](#) table to determine device power dissipation in partial power-down mode.

The AFE uses PLLs that generate the high speed clock for the interfaces. Switching activity on the PDN\_FAST pin can possibly result in disturbance to the PLL operation because of board-level coupling mechanisms. Such a disturbance can result in a loss of synchronization at the FPGA and may require re-synchronization on resumption of normal operation.

### 9.4.3 Global Power-Down Mode

To achieve the lowest power dissipation, the device can be placed into a complete power-down mode. This mode is controlled through the GBL\_PDWN (for the VCA) or GLOBAL\_PDN (for the ADC) registers or the PDN\_GBL pin (for both the VCA and ADC). In complete power-down mode, all circuits (including reference circuits within the device) are powered down and the capacitors connected to the device are discharged. The wake-up time depends on the time that the device spends in shutdown mode. A 0.01- $\mu$ F capacitor at INP without a capacitor at INM provides a wake-up time of approximately 1 ms.

### 9.4.4 TGC Configuration

By default, the VCA is configured in TGC mode after reset. Depending upon the system requirements, the device can be programmed in a suitable power mode using the MEDIUM\_POW (register 206, bit 14) and LOW\_POW (register 200, bit 12) register bits.

### 9.4.5 Digital TGC Test Modes

The available test mode bits in the TGC engine are: ENABLE\_INT\_START, NEXT\_CYCLE\_WAIT\_TIME, MANUAL\_START, FLIP\_ATTEN, and DIS\_ATTEN.

### 9.4.5.1 ENABLE\_INT\_START and NEXT\_CYCLE\_WAIT\_TIME

In internal non-uniform digital TGC mode, the device gain starts changing after the TGC\_SLOPE pin level goes high. Instead of applying a signal on the TGC\_SLOPE pin, the device generates a signal to start the device gain. To generate a signal internally, set the ENABLE\_INT\_START bit (register 181, bit 14) to 1. When a complete cycle of the gain curve completes and the device gain returns to the start gain stage, the next start pulse is generated after the NEXT\_CYCLE\_WAIT\_TIME (register 183, bits 15-0) number of ADC clock cycles, as shown in 图 99.

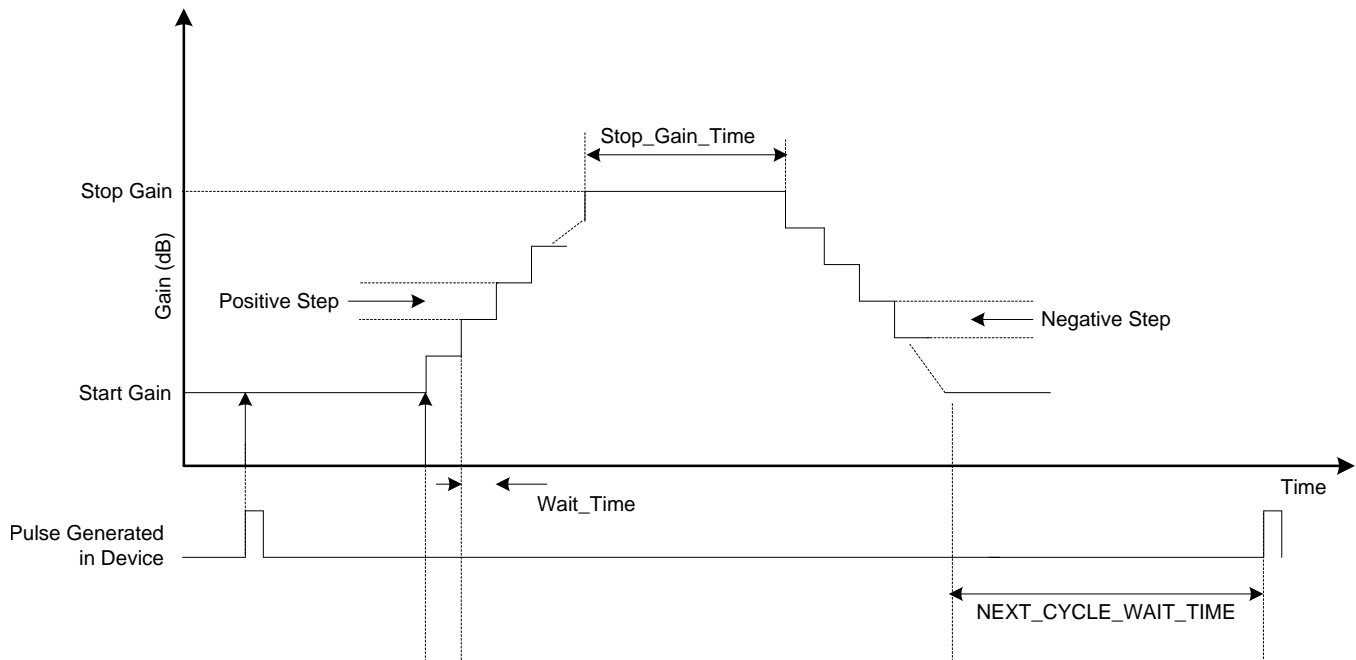


图 99. Internal Non-Uniform Test Mode

### 9.4.5.2 MANUAL\_START

In up, down ramp mode and internal non-uniform mode, a single TGC start pulse provided on the TGC\_SLOPE pin can be generated by the device when the MANUAL\_START bit is enabled. In up, down ramp mode, the MANUAL\_START bit also generates a pulse that performs the same functionality that applying a pulse on the TGC\_UP\_DOWN pin does (that is, reduces the signal gain from stop gain to start gain).

### 9.4.5.3 FLIP\_ATTEN

By default, the attenuation of an attenuator block is varied and followed by an LNA gain variation in all TGC modes. When the FLIP\_ATTEN bit (register 182, bit 6) is enabled, the LNA gain is varied first and then followed by the attenuation of an attenuator block.

### 9.4.5.4 DIS\_ATTEN

When the DIS\_ATTEN bit is set to 1, the attenuation block is disabled.

### 9.4.5.5 Fixed Attenuation Mode

The attenuator block can be programmed in fixed attenuation mode (that is, the attenuation does not change with time by enabling the FIX\_ATTEN\_x (x is the profile number) bit in the [DTGC Register Map](#)). When the FIX\_ATTEN\_x bit is set to 1, the attenuation value is set using the ATTENUATION\_x register bits. A value of  $N$  written in the ATTENUATION\_x register sets the attenuation level at  $-8 + N \times 0.125$  dB.

### 9.4.6 CW Configuration

To configure the device in CW mode, set the CW\_TGC\_SEL register bit (register 192, bit 0) to 1. To save power, the ADC can be powered down completely using the GLOBAL\_PDN bit (register 1, bit 0). Usually only half the number of channels in a system are active in the CW mode. Thus, the individual channel control can power-down unused channels and save power; see Table 18 and Table 19. Enabling CW mode automatically configures the LNA from TGC mode to CW mode and disables the LPF stage.

### 9.4.7 TGC + CW Mode

This device does not support TGC and CW mode simultaneously. Only one mode can remain active at a time.

## 9.5 Programming

### 9.5.1 Serial Peripheral Interface (SPI) Operation

This section discusses the read and write operations of the SPI interface.

#### 9.5.1.1 Serial Register Write Description

Several different modes can be programmed with the serial peripheral interface (SPI). This interface is formed by the SEN (serial interface enable), SCLK (serial interface clock), SDIN (serial interface data), and RESET pins. The SCLK, SDIN, and RESET pins have a 16-kΩ pulldown resistor to ground. SEN has a 16-kΩ pullup resistor to supply. Serially shifting bits into the device is enabled when SEN is low. SDIN serial data are latched at every SCLK rising edge when SEN is active (low). SDIN serial data are loaded into the register at every 24th SCLK rising edge when SEN is low. If the word length exceeds a multiple of 24 bits, the excess bits are ignored. Data can be loaded in multiples of 24-bit words within a single active SEN pulse (an internal counter counts the number of 24 clock groups after the SEN falling edge). Data are divided into two main portions: the register address (8 bits) and data (16 bits). Figure 100 shows the timing diagram for serial interface write operation.


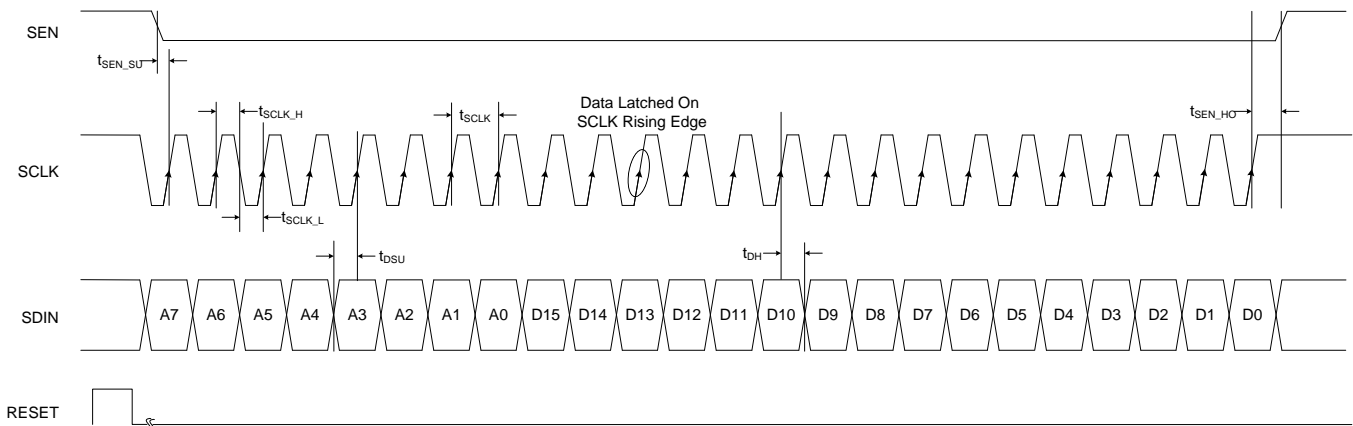


图 100. Serial Interface Timing

## Programming (接下页)

### 9.5.1.2 Register Readout

The device includes an option where the contents of the internal registers can be read back. This readback can be useful as a diagnostic test to verify the serial interface communication between the external controller and AFE. First, the REG\_READ\_EN bit must be set to 1. Then, initiate a serial interface cycle specifying the address of the register (A[7:0]) whose content must be read. The data bits are *don't care*. The device outputs the contents (D[15:0]) of the selected register on the SDOUT pin. For lower-speed SCLKs, SDOUT can be latched on the SCLK rising edge. For higher-speed SCLKs, latching SDOUT at the next SCLK falling edge is preferable. The read operation timing diagram is shown in [图 101](#). In readout mode, the REG\_READ\_EN bit can be accessed with SDIN, SCLK, and SEN. To enable serial register writes, set the REG\_READ\_EN bit back to 0.

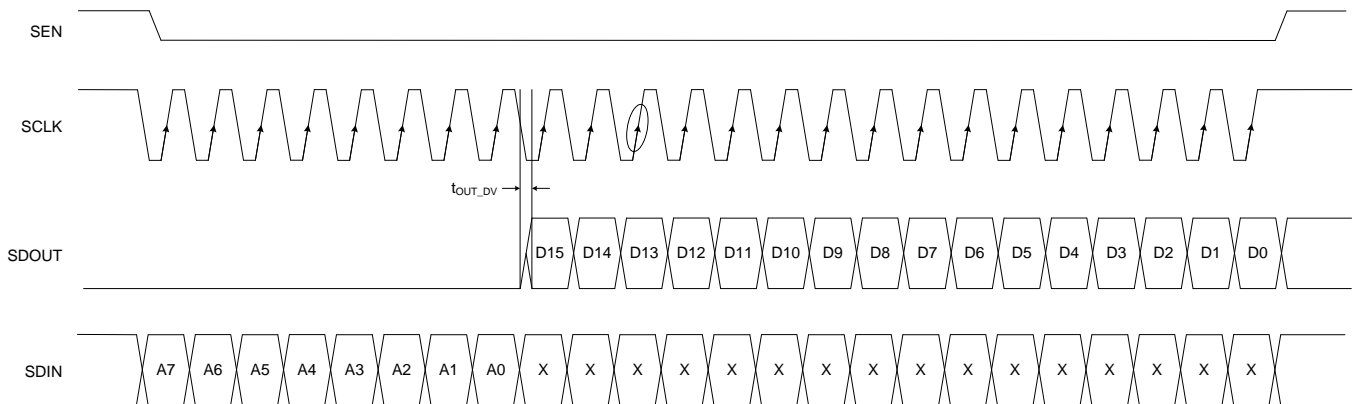

**图 101. Serial Interface Register, Read Operation**

The device SDOUT buffer is 3-stated and is only enabled when the REG\_READ\_EN bit is enabled. SDOUT pins from multiple devices can therefore be tied together without any pullup resistors. The [SN74AUP1T04](#) level shifter can be used to convert 1.8-V logic to 2.5-V or 3.3-V logic, if necessary.



## 10 Application and Implementation

### 注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 10.1 Application Information

The device supports a wide-frequency bandwidth signal in the range of several kHz to several MHz. The device is a highly-integrated solution that includes an attenuator, low-noise amplifier (LNA), an antialiasing filter, an analog-to-digital converter (ADC), and a continuous-wave (CW) mixer. As a result of the device functionality, the device can be used in various applications (such as in medical ultrasound imaging systems, sonar imaging equipment, radar, and other systems that require a very large dynamic range).

### 10.2 Typical Application

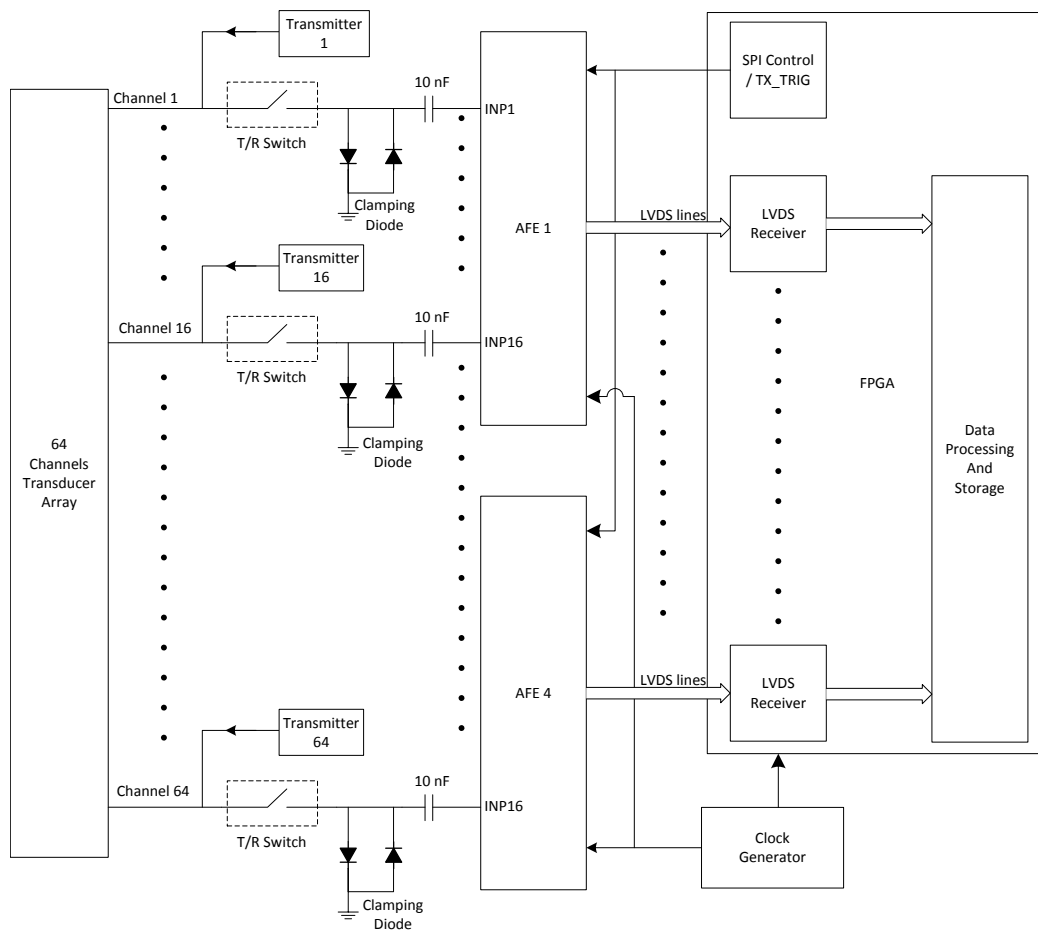


图 102. Simplified Schematic for a Medical Ultrasound Imaging System

Typical Application (接下页)

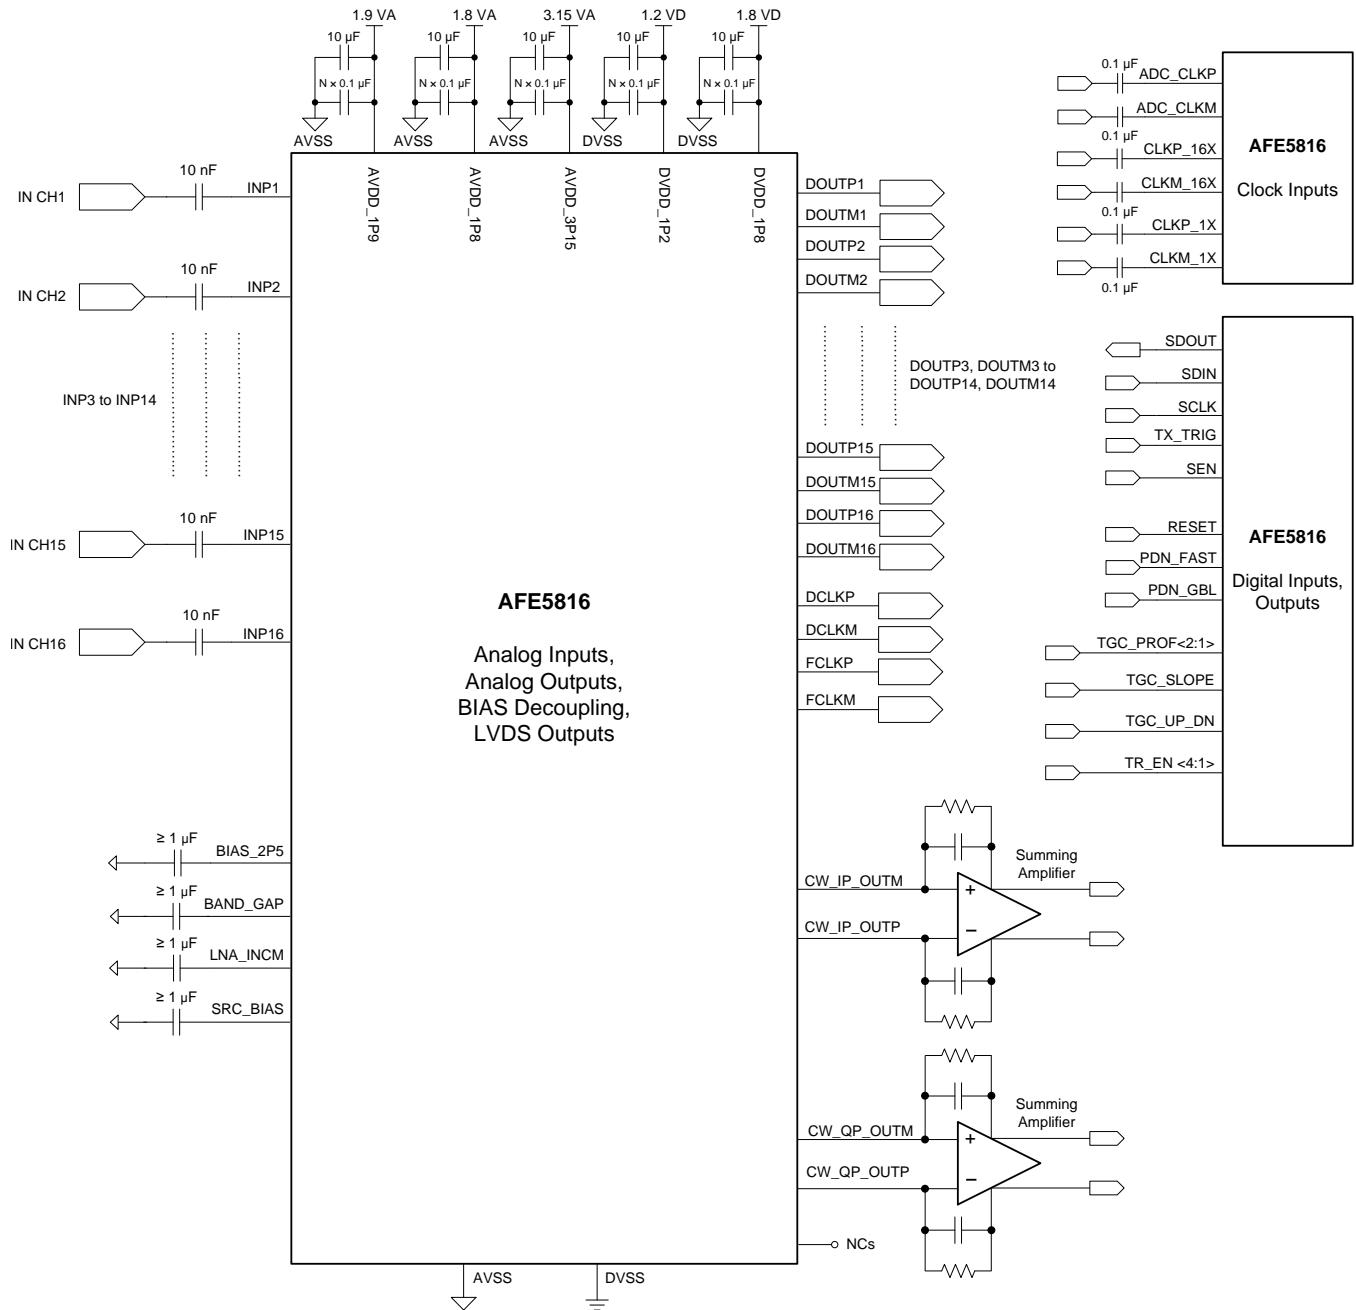


图 103. Application Circuit

## Typical Application (接下页)

### 10.2.1 Design Requirements

Typical requirements for a medical ultrasound imaging system are listed in [表 21](#).

**表 21. Design Parameters**

DESIGN PARAMETER	EXAMPLE VALUES
Signal center frequency	5 MHz
Signal bandwidth	2 MHz
Maximum overloaded signal	1 V <sub>PP</sub>
Maximum input signal amplitude	100 mV <sub>PP</sub>
Transducer noise level	1 nV/√Hz
Dynamic range	151 dBc/Hz
Time-gain compensation range	40 dB
Total harmonic distortion	40 dBc

### 10.2.2 Detailed Design Procedure

Medical ultrasound imaging is a widely-used diagnostic technique that enables visualization of internal organs, their size, structure, and blood flow estimation. An ultrasound system uses a focal imaging technique that involves time shifting, scaling, and intelligently summing the echo energy using an array of transducers to achieve high imaging performance. The concept of focal imaging provides the ability to focus on a single point in the scan region. By subsequently focusing at different points, an image is assembled.

See [图 102](#) for a simplified schematic of a 64-channel ultrasound imaging system. When initiating an ultrasound image, a pulse is generated and transmitted from each of the 64 transducer elements. The pulse, now in the form of mechanical energy, propagates through the body as sound waves, typically in the frequency range of 1 MHz to 15 MHz.

The sound waves weaken rapidly as they travel through the objects being imaged, falling off as the square of the distance traveled. As the signal travels, portions of the wave front energy are reflected. Signals that are reflected immediately after transmission are very strong because they are from reflections close to the surface; reflections that occur long after the transmit pulse are very weak because they are reflecting from deep in the body. As a result of the limitations on the amount of energy that can be put into the imaging object, the industry developed extremely sensitive receive electronics. Receive echoes from focal points close to the surface require little, if any, amplification. This region is referred to as the *near field*. However, receive echoes from focal points deep in the body are extremely weak and must be amplified by a factor of 100 or more. This region is referred to as the *far field*. In the high-gain (far field) mode, the limit of performance is the sum of all noise sources in the receive chain.

In high-gain (far field) mode, system performance is defined by its overall noise level, which is limited by the noise level of the transducer assembly and the receive low-noise amplifier (LNA). However, in the low-gain (near field) mode, system performance is defined by the maximum amplitude of the input signal that the system can handle. The ratio between noise levels in high-gain mode and the signal amplitude level in low-gain mode is defined as the dynamic range of the system.

The high integration and high dynamic range of the device make the AFE5816 ideally-suited for ultrasound imaging applications. The device includes an integrated attenuator, an LNA (with variable gain that can be changed with enough time to handle both near- and far-field systems), a low-pass antialiasing filter to limit the noise bandwidth, an ADC with high SNR performance, and a CW mixer. [图 103](#) illustrates an application circuit of the device.

The following steps detail how to design medical ultrasound imaging systems:

1. Use the signal center frequency and signal bandwidth to select an appropriate ADC sampling frequency.
2. Use the time-gain compensation range to select the range of the LNA gain.
3. Use the transducer noise level and maximum input signal amplitude to select the appropriate LNA gain. The device input-referred noise level reduces with higher LNA gain. However, higher LNA gain leads to lower input signal swing support.
4. See [图 103](#) to select different passive components for different device pins.
5. See the [CW Clock Selection](#) section to select the clock configuration for the ADC and CW clocks.

### 10.2.3 Application Curves

[图 104](#) and [图 105](#) show the FFT of a device output for gain code = 64 and gain code = 319, respectively, with an input signal at 5 MHz captured at a sample rate of 50 MHz. [图 104](#) shows the spectrum for a far-field imaging scenario with the full Nyquist band, default device settings, and gain code = 319. [图 105](#) shows the spectrum for a near-field imaging scenario for the full Nyquist band with default device settings and gain code = 64.

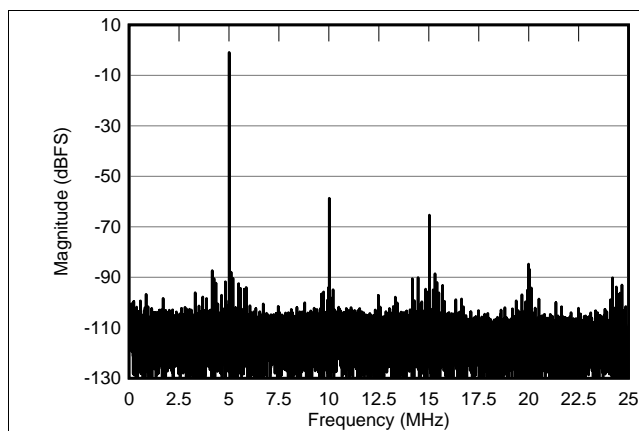


图 104. FFT for Gain Code = 14 dB

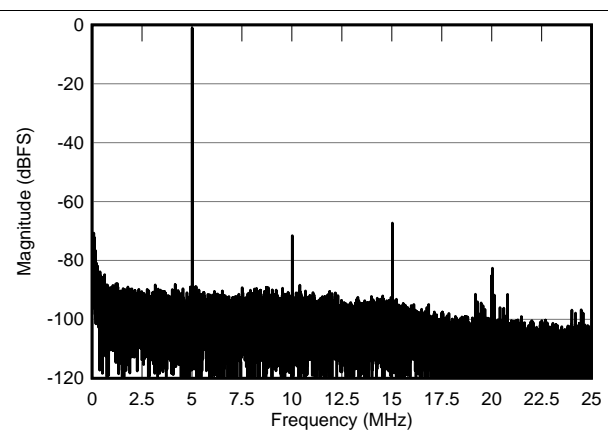


图 105. FFT for Gain Code = 45 dB

### 10.3 Do's and Don'ts

**Driving the inputs (analog or digital) beyond the power-supply rails.** For device reliability, an input must not go more than 300 mV below the ground pins or 300 mV above the supply pins, as suggested in the [Absolute Maximum Ratings](#) table. Exceeding these limits, even on a transient basis, can cause faulty or erratic operation and can impair device reliability.

**Driving the device signal input with an excessively high-level signal.** The device offers consistent and fast overload recovery with a 6-dB overloaded signal. For very large overload signals (> 6 dB of the linear input signal range), TI recommends back-to-back Schottky clamping diodes at the input to limit the amplitude of the input signal.

**Not meeting timing requirements on the TGC\_SLOPE and TGC\_UP\_DN pins.** If timing is not met between the TGC\_SLOPE and TGC\_UP\_DN signals and the ADC clock signal, then the TGC engine is placed into a locked state. See the [Timing Specifications](#) section for more details.

**Using a clock source with excessive jitter, an excessively long input clock signal trace, or having other signals coupled to the ADC or CW clock signal trace.** These situations cause the sampling interval to vary, causing an excessive output noise and a reduction in SNR performance. For a system with multiple devices, the clock tree scheme must be used to apply an ADC or CW clock. See the [System Clock Configuration for Multiple Devices](#) section for clock mismatch between devices, which can lead to latency mismatch and reduction in SNR performance.

**LVDS routing length mismatch.** The routing length of all LVDS lines routed to the FPGA must be matched to avoid any timing-related issues. For systems with multiple devices, the LVDS serialized data clock (DCLKP, DCLKM) and the frame clock (FCLKP, FCLKM) of each individual device must be used to deserialize the corresponding LDVS serialized data (DOUTP, DOUTM).

**Failure to provide adequate heat removal.** Use the appropriate thermal parameter listed in the [Thermal Information](#) table and an ambient, board, or case temperature in order to calculate device junction temperature. A suitable heat removal technique must be used to keep the device junction temperature below the maximum limit of 105°C.

**Incorrect register programming.** After resetting the device, write register 1, bit 2 = 1 and register 1, bit 4 = 1. If these bits are not set as specified, the device does not function properly.

### 10.4 Initialization Set Up

After bringing up all the supplies, follow these steps to initialize the device:

1. Apply a hardware reset pulse on the RESET pin with a minimum pulse duration of 100 ns. Note that after powering up the device, a hardware reset is required.
2. After applying a hardware reset pulse, wait for a minimum time of 100 ns.
3. Set register 1, bit 2 and bit 4 to 1 using SPI signals.
4. 100  $\mu$ s or later after the start of clock, write the PLLRST1 and PLLRST2 bits to 1. Then, after waiting for at least 10  $\mu$ s, write both these bits to 0, which helps initialize the PLL in a proper manner. This method of PLL initialization is also required whenever the device comes out of a global power-down mode or when ADC\_CLK is switched off and turned on again.
5. Write any other register settings as required.


## 11 Power Supply Recommendations

The device requires a total of five supplies in order to operate properly. These supplies are: AVDD\_3P15, AVDD\_1P9, AVDD\_1P8, DVDD\_1P8, and DVDD\_1P2. See the [Recommended Operating Conditions](#) table for detailed information regarding the minimum and maximum operating voltage specifications of different supplies.

### 11.1 Power Sequencing and Initialization

#### 11.1.1 Power Sequencing

图 106 shows the suggested power-up sequencing and reset timing for the device. Note that the DVDD\_1P2 supply must rise before the AVDD\_1P8 supply. If the AVDD\_1P8 supply rises before the DVDD\_1P2 supply, the AVDD\_1P8 supply current is several times larger than the normal current until the DVDD\_1P2 supply reaches a 1.2-V level.

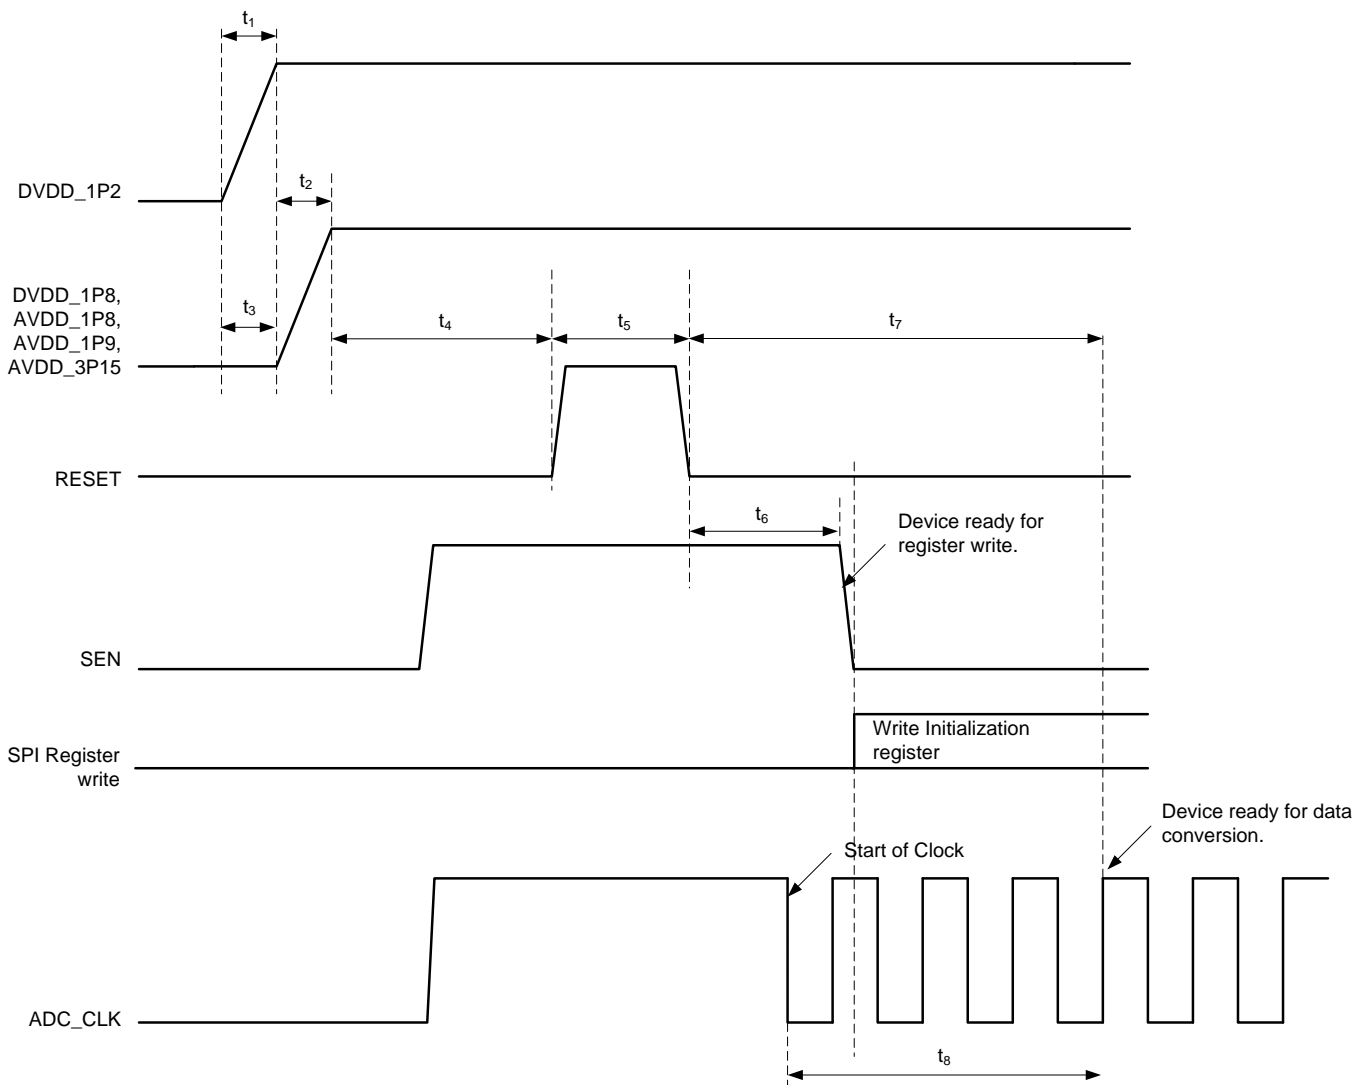

NOTE:  $10\ \mu\text{s} < t_1 < 50\ \text{ms}$ ,  $10\ \mu\text{s} < t_2 < 50\ \text{ms}$ ,  $t_3 > t_1$ ,  $t_4 > 10\ \text{ms}$ ,  $t_5 > 100\ \text{ns}$ ,  $t_6 > 100\ \text{ns}$ ,  $t_7 > 4\ \text{ADC clock cycles}$ , and  $t_8 > 100\ \mu\text{s}$ .

**图 106. Recommended Power-Up Sequencing and Reset Timing Diagram**

## Power Sequencing and Initialization (接下页)

### 11.1.2 PLL Initialization

100  $\mu$ s or later after the start of clock, write the PLLRST1 and PLLRST2 bits to 1. Then, after waiting for at least 10  $\mu$ s, write both these bits to 0, which helps initialize the PLL in a proper manner. This method of PLL initialization is also required whenever the device comes out of a global power-down mode or when ADC\_CLK is switched off and turned on again.

## 12 Layout

### 12.1 Layout Guidelines

#### 12.1.1 Power Supply, Grounding, and Bypassing

In a mixed-signal system design, the power-supply and grounding design play a significant role. The device distinguishes between two different grounds: AVSS (analog ground) and DVSS (digital ground). In most cases, designing the printed circuit board (PCB) to use a single ground plane is adequate, but in high-frequency or high-performance systems care must be taken so that this ground plane is properly partitioned between various sections within the system to minimize interactions between analog and digital circuitry. Alternatively, the digital supply set consisting of the DVDD\_1P8, DVDD\_1P2, and DVSS pins can be placed on separate power and ground planes. For this configuration, tie the AVSS and DVSS grounds together at the power connector in a star layout. In addition, optical or digital isolators (such as the [ISO7240](#)) can completely separate the analog portion from the digital portion. Consequently, such isolators prevent digital noise from contaminating the analog portion. [表 22](#) lists the related circuit blocks for each power supply.

**表 22. Supply versus Circuit Blocks**

POWER SUPPLY	GROUND	CIRCUIT BLOCKS <sup>(1)</sup>
AVDD_3P15	AVSS	Reference voltage and current generator, LNA, VCNTL, CW mixer, CW clock buffer, 16 x 16 cross-point switch, and 16-phase generator blocks
AVDD_1P9	AVSS	Band-gap circuit, reference voltage and current generator, LNA, PGA, LPF, and VCA SPI blocks
AVDD_1P8	AVSS	ADC analog, reference voltage and current generator, band-gap circuit, ADC clock buffer
DVDD_1P8	DVSS	LVDS serializer and buffer, and PLL blocks
DVDD_1P2	DVSS	ADC digital and serial interface blocks

(1) See [Figure 96](#) and [Figure 97](#) for further details.

Reference all bypassing and power supplies for the device to their corresponding ground planes. Bypass all supply pins with 0.1- $\mu$ F ceramic chip capacitors (size 0603 or smaller). In order to minimize the lead and trace inductance, the capacitors must be located as close to the supply pins as possible. Where double-sided component mounting is allowed, these capacitors are best placed directly under the package. In addition, larger bipolar decoupling capacitors (2.2  $\mu$ F to 10  $\mu$ F, effective at lower frequencies) can also be used on the main supply pins. These components can be placed on the PCB in close proximity (< 0.5 inch or 12.7 mm) to the device itself.

The device has a number of reference supplies that must be bypassed, such as BIAS\_2P5, LNA\_INCM, BAND\_GAP, and SRC\_BIAS. Bypass these pins with at least a 1- $\mu$ F capacitor; higher value capacitors can be used for better low-frequency noise suppression. For best results, choose low-inductance ceramic chip capacitors (size 0402, > 1  $\mu$ F) placed as close as possible to the device pins.

### 12.1.2 Board Layout

High-speed, mixed-signal devices are sensitive to various types of noise coupling. One primary source of noise is the switching noise from the serializer and the output buffer and drivers. For the device, care must be taken to ensure that the interaction between the analog and digital supplies within the device is kept to a minimal amount. The extent of noise coupled and transmitted from the digital and analog sections depends on the effective inductances of each supply and ground connection; smaller effective inductances of the supply and ground pins result in better noise suppression. For this reason, multiple pins are used to connect each supply and ground set. Low inductance properties must be maintained throughout the design of the PCB layout by the use of proper planes and layer thickness.

To avoid noise coupling through supply pins, keep sensitive input pins (such as the INM and INP pins) away from the AVDD\_3P15 and AVDD\_1P9 planes. For example, do not route the traces or vias connected to these pins across the AVDD\_3P15 and AVDD\_1P9 planes. That is, avoid the power planes under the INM and INP pins.

In order to maintain proper LVDS timing, all LVDS traces must follow a controlled impedance design. In addition, all LVDS trace lengths must be equal and symmetrical; keep trace length variations less than 150 mil (0.150 inch or 3.81 mm).

In addition, appropriate delay matching must be considered for the CW clock path, especially in systems with a high channel count. For example, if the clock delay is half of the 16X clock period, a phase error of 22.5°C can exist. Thus, the timing delay difference among channels contributes to the beamformer accuracy.

Additional details on the NFBGA PCB layout techniques can be found in the Texas Instruments application report [SSYZ015](#) that can be downloaded from [www.ti.com](http://www.ti.com).

### 12.2 Layout Example

图 107 和 图 108 illustrate example layouts for the top and bottom layers, respectively.

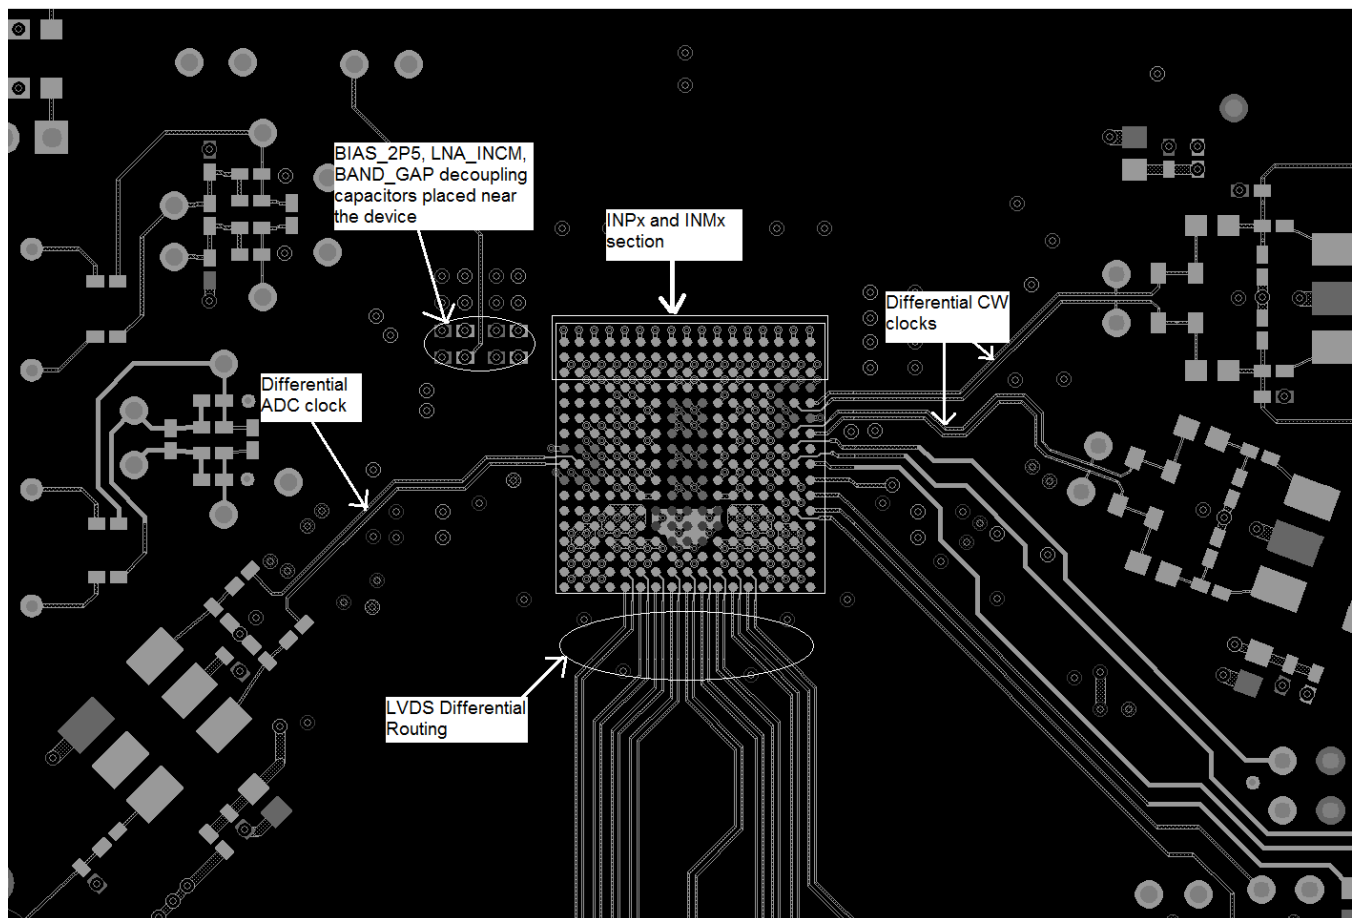


图 107. Top Layer



Layout Example (接下页)

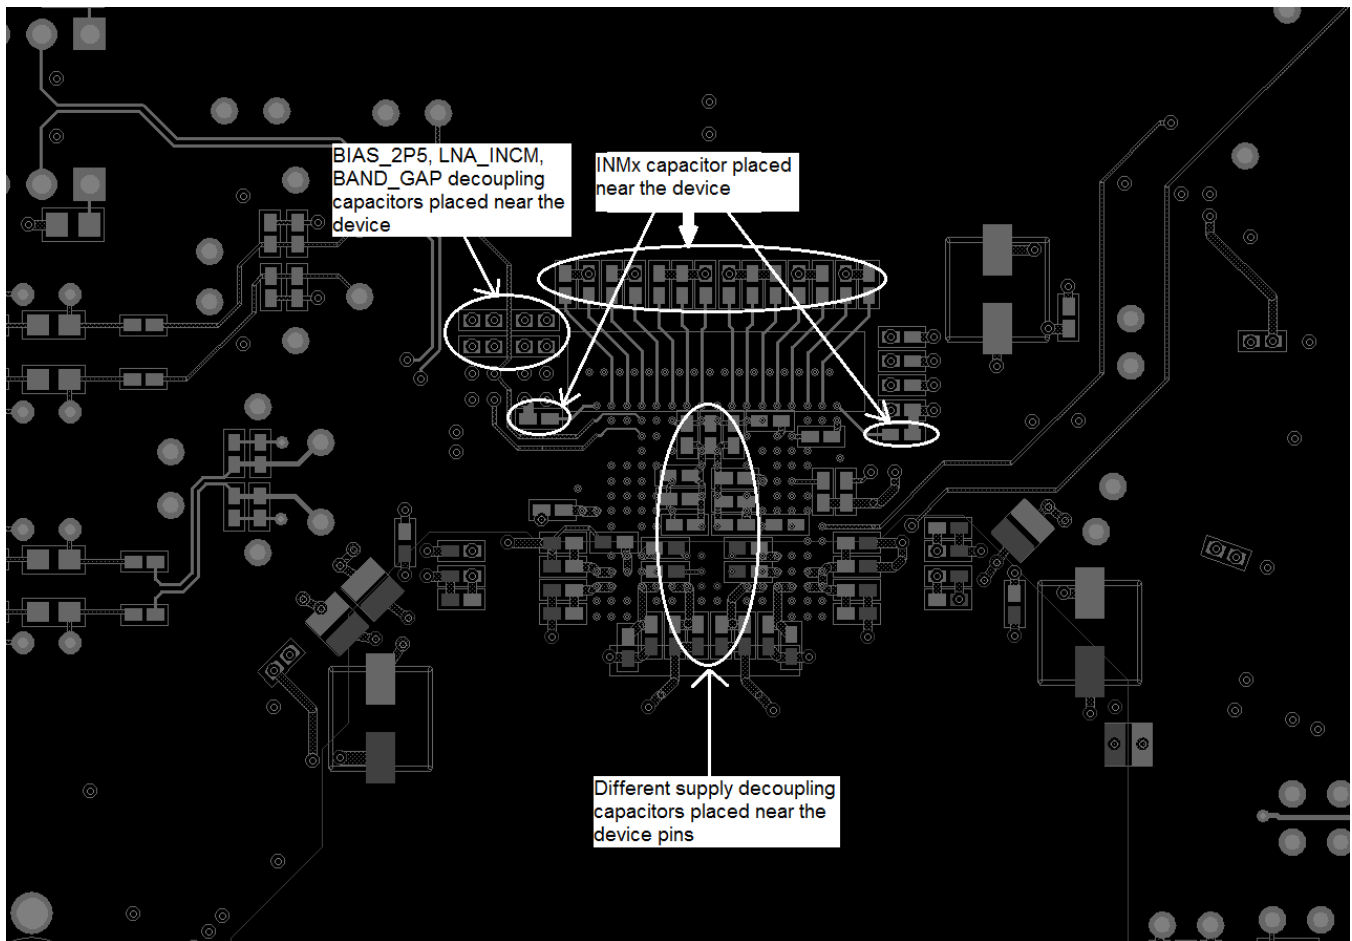


图 108. Bottom Layer

Layout Example (接下页)

图 109 shows the routing of input traces and differential CW outputs.

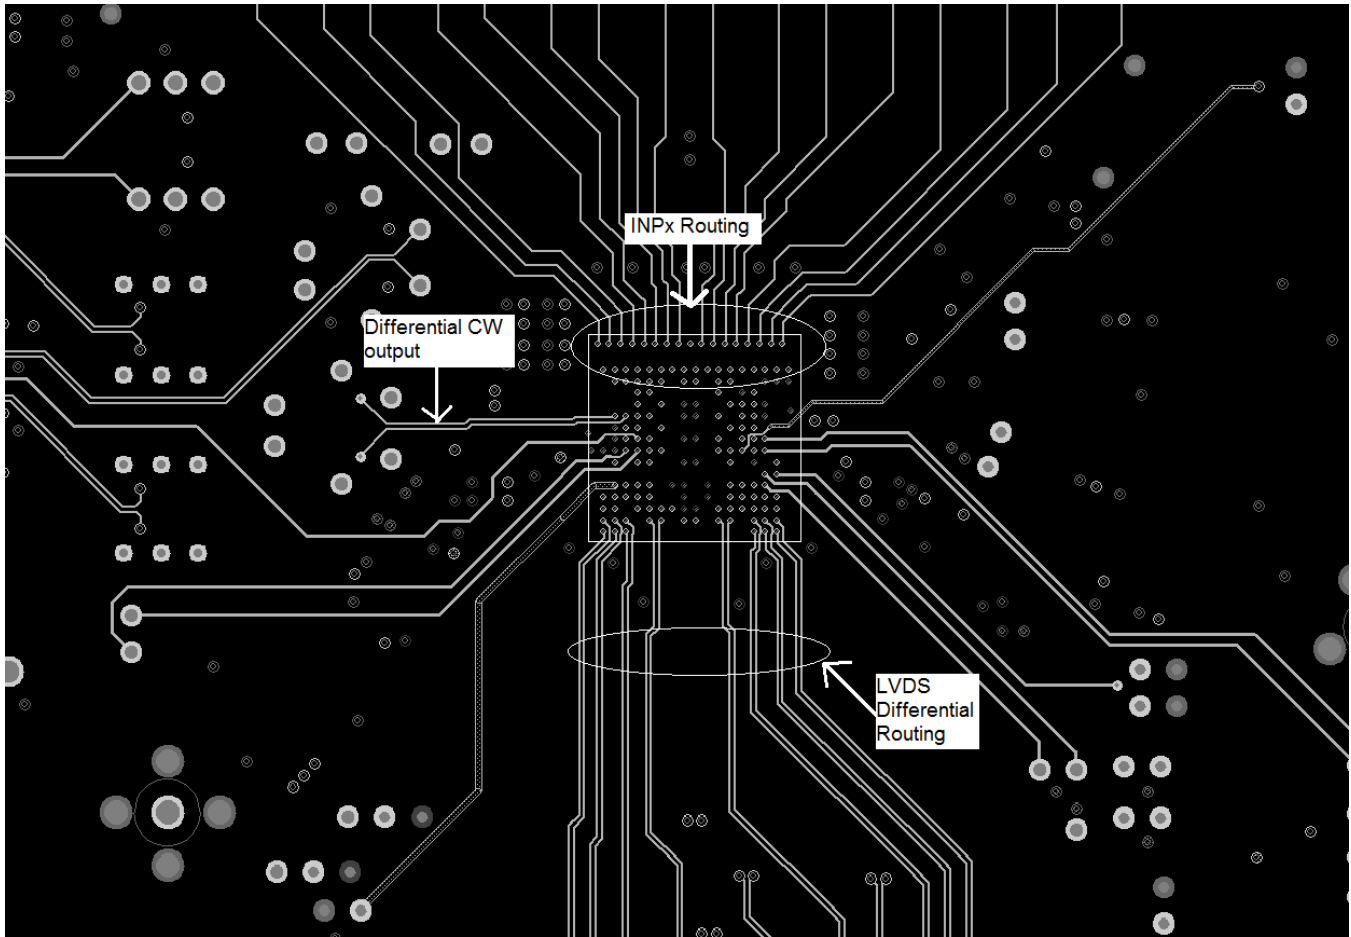


图 109. Input Routing

Layout Example (接下页)

图 110 shows routing examples for different power planes.

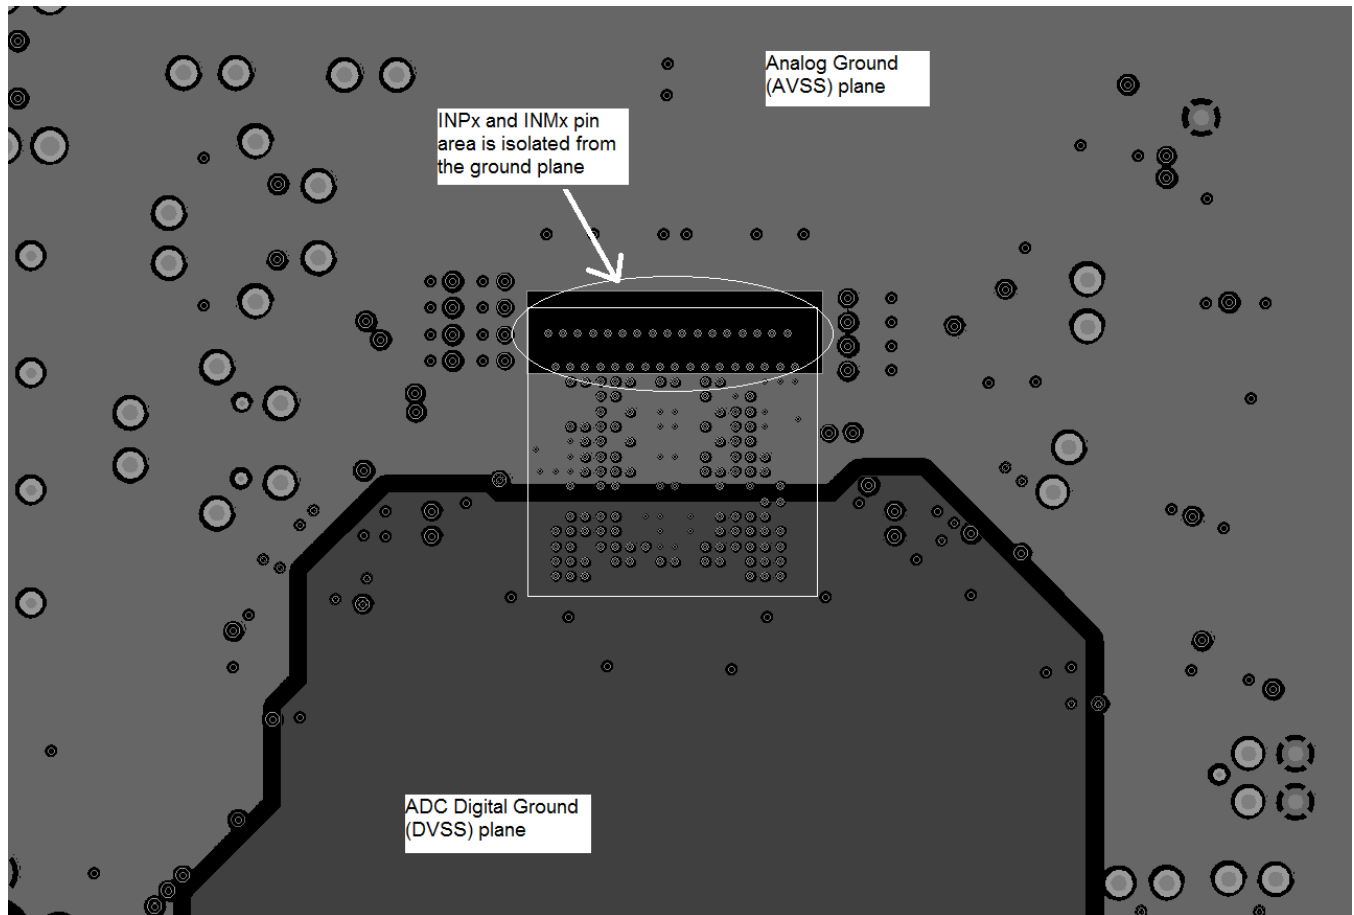


图 110. Ground Plane

Layout Example (接下页)

图 111, 图 112, and 图 113 illustrate routing examples for different power planes.

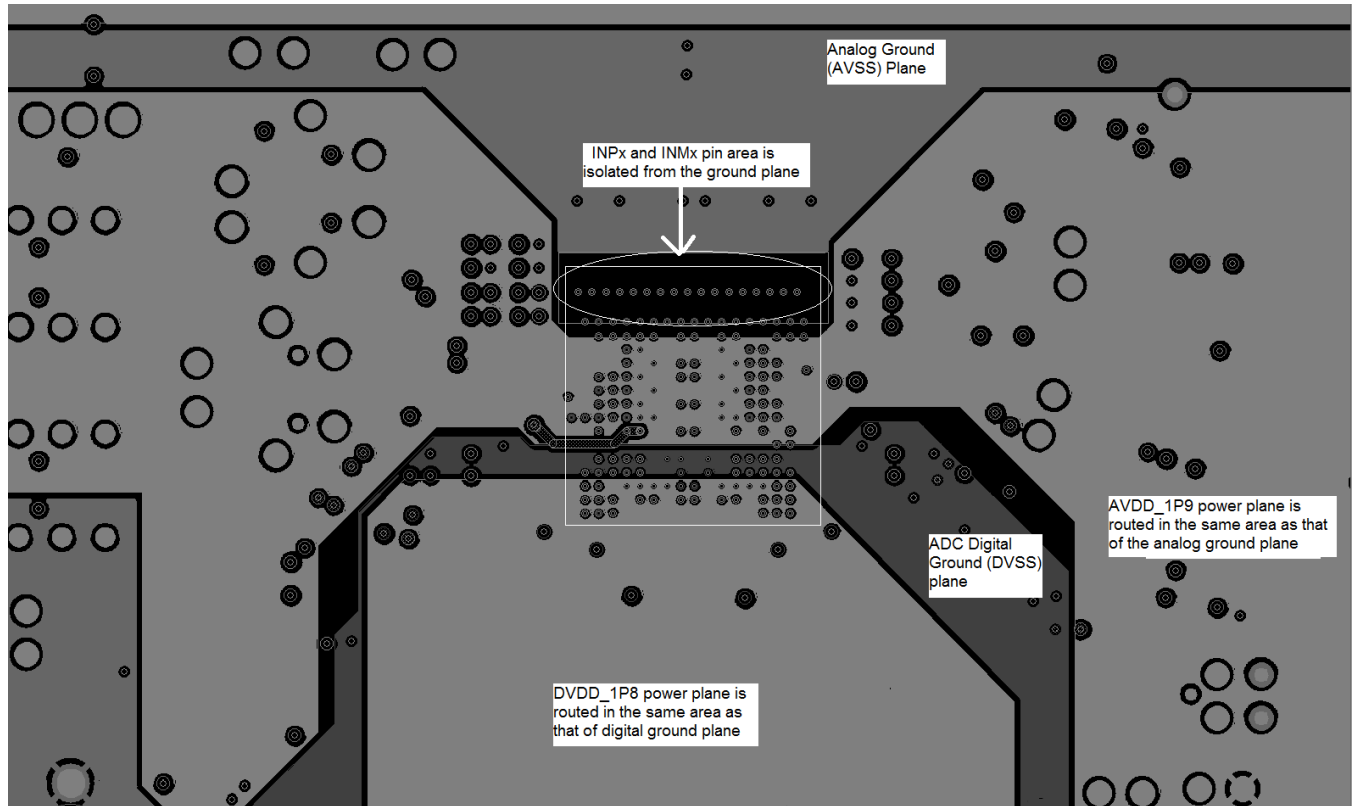


图 111. AVDD\_1P9 and DVDD\_1P8 Power Plane

Layout Example (接下页)

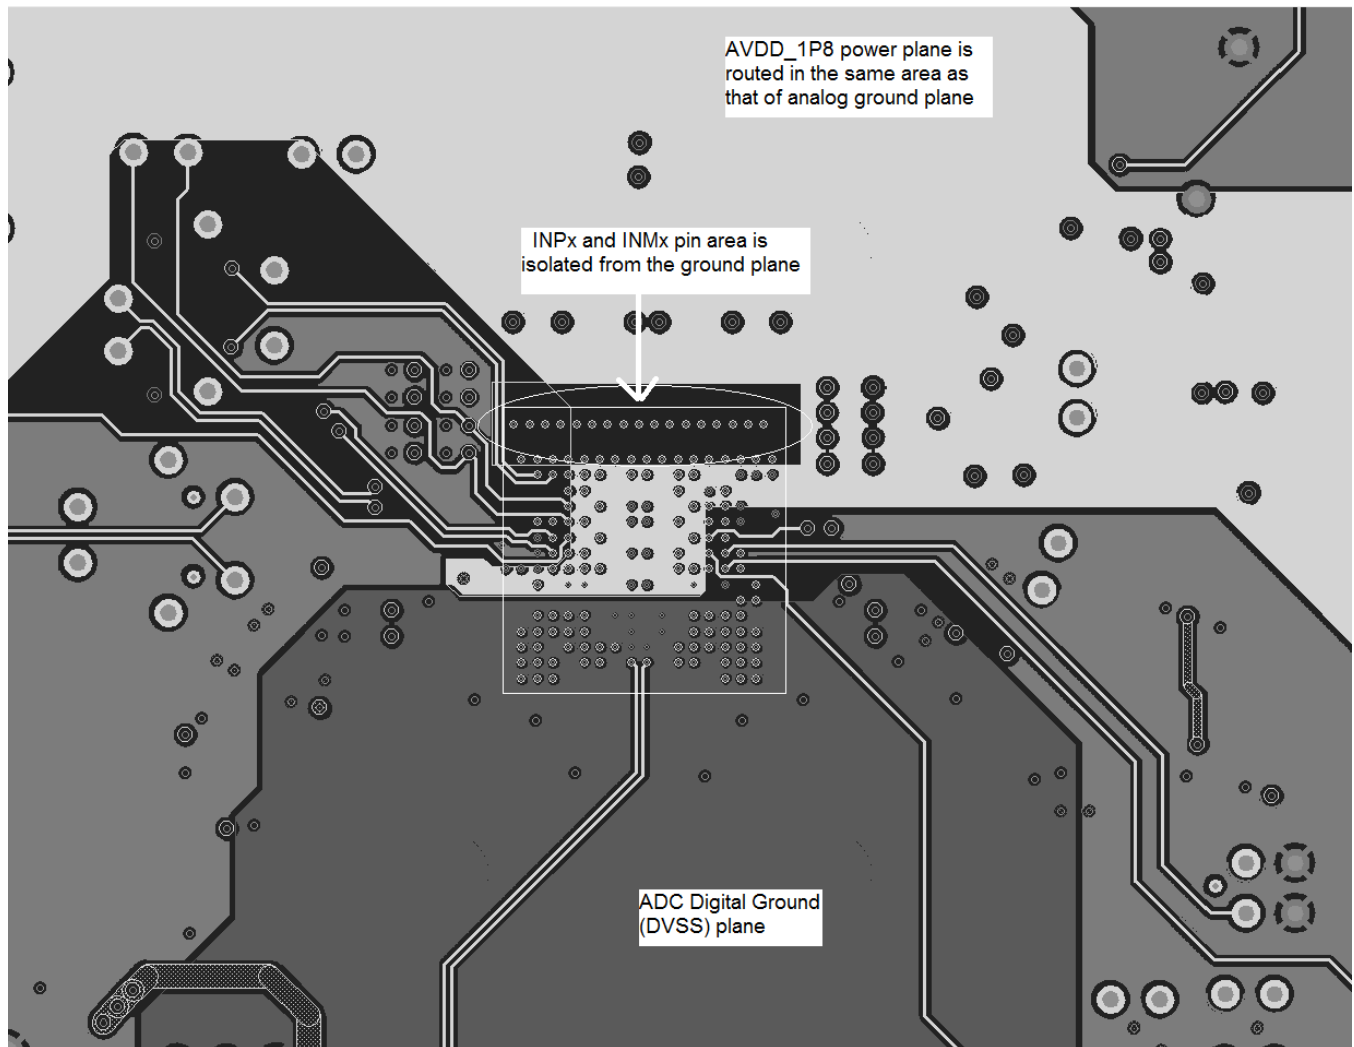


图 112. AVDD\_1P8 Power Plane

Layout Example (接下页)


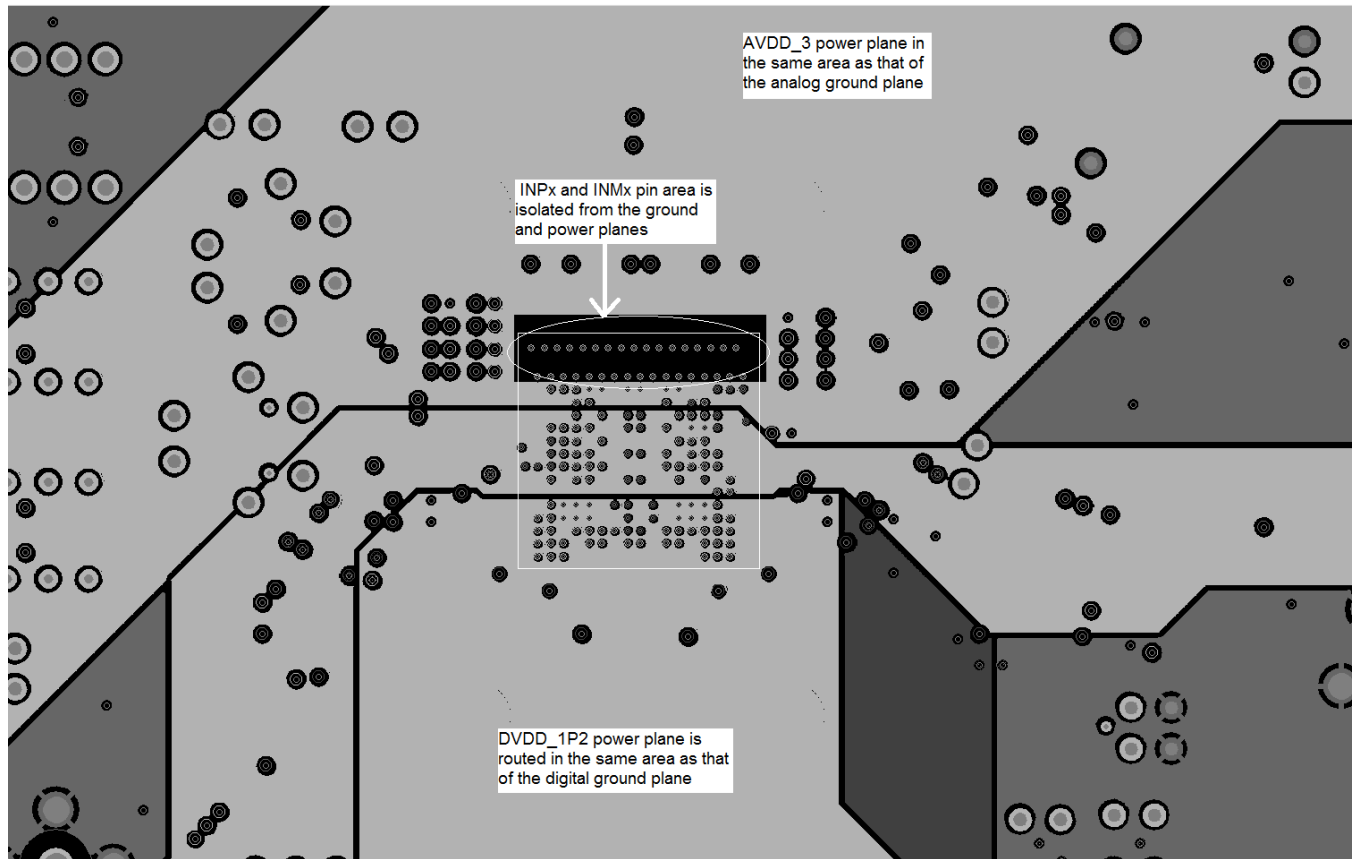


图 113. AVDD\_3P15 and DVDD\_1P2 Power Plane

## 13 Register Maps

### 13.1 Serial Register Map

The device is a multichip module (MCM) with two dies: the VCA die and the ADC\_CONV die, as shown in Figure 114. Figure 114 also describes the channel mapping of the VCA die to the input pins. Both dies share the same SPI control signals (SCLK, SDIN, and SEN).

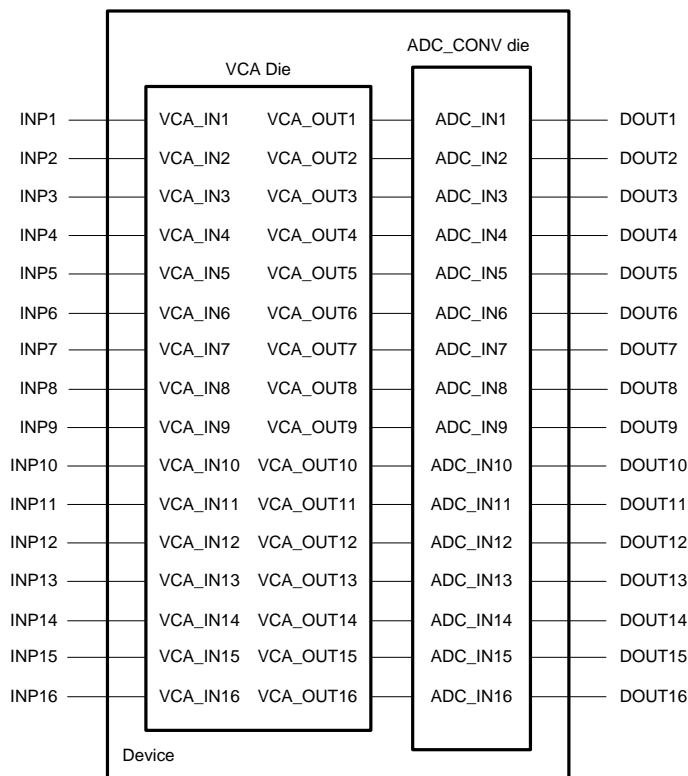

**Figure 114. Channel Mapping: VCA Dies**

A reset process is required at the device initialization stage.

#### NOTE

Initialization can be accomplished with a hardware reset by applying a positive pulse to the RESET pin. After reset, all ADC and VCA registers are set to default values. Note that during register programming, all unnamed register bits must be set to 0 for the register that is being programmed.

The device consists of the following register maps:

1. Global register map. This register map is common to both the ADC\_CONV and VCA dies. The global register map consists of register 0. To program the global register map, set the DTGC\_WR\_EN bit to 0.
2. ADC register map. This register map programs the ADC die. The ADC register map consists of register 1 to register 67. To program the ADC register map, set the DTGC\_WR\_EN bit to 0.
3. VCA register map. This register map contains register 192 to register 230 and programs all VCA blocks except the DTGC engine. To program the VCA register map, set the DTGC\_WR\_EN bit to 0.
4. DTGC register map. This register map contains register 1 to register 186 and programs the TGC control engine of the VCA die. To program the DTGC register map, set the DTGC\_WR\_EN bit to 1.

### Serial Register Map (continued)

Because these register maps share the same address space, the DTGC\_WR\_EN bit is used to program the different register maps, as listed in [Table 23](#).

**Table 23. Register Configuration**

REGISTER MAP	ADDRESS	DTGC_WR_EN BIT
Global register map	0	0
ADC register map	1 to 67	0
VCA register map	192 to 230	0
DTGC register map	1 to 186	1

#### 13.1.1 Global Register Map

This section discusses the global register. This register map is shown in [Table 24](#).

DTGC\_WR\_EN must be set to 0 before programming other bits of the global register map.

**Table 24. Global Register Map**

REGISTER ADDRESS		REGISTER DATA <sup>(1)</sup>															
DECIMAL	HEX	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	0	0	0	0	0	0	0	0	0	0	0	0	DTGC_WR_EN	0	0	REG_READ_EN	SOFTWARE_RESET

(1) The default value of all registers is 0.

#### 13.1.1.1 Description of Global Register

##### 13.1.1.1.1 Register 0 (address = 0h)

**Figure 115. Register 0**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	0	0
W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h
7	6	5	4	3	2	1	0
0	0	0	DTGC_WR_EN	0	0	REG_READ_EN	SOFTWARE_RESET
W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h

LEGEND: W = Write only; -n = value

**Table 25. Register 0 Field Descriptions**

Bit	Field	Type	Reset	Description
15-5	0	W	0h	Must write 0
4	DTGC_WR_EN	W	0h	0 = Enables programming of the global, ADC, and VCA register maps 1 = Enables programming of the DTGC register map
3-2	0	W	0h	Must write 0
1	REG_READ_EN	W	0h	0 = Register readout mode disabled 1 = Register readout mode enabled
0	SOFTWARE_RESET	W	0h	0 = Disabled 1 = Enabled (this setting returns the device to a reset state). This bit is a self-clearing register bit.



### 13.1.2 ADC Register Map

This section discusses the ADC register map. A register map is available in [Table 26](#).

DTGC\_WR\_EN must be set to 0 before programming the ADC register map.

**Table 26. ADC Register Map**

REGISTER ADDRESS		REGISTER DATA <sup>(1)</sup>																
DECIMAL	HEX	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
1	1	0	LVDS_RATE_2X	0	0	0	0	0	0	0	0	DIS_LVDS	1	0	1	0	GLOBAL_PDN	
2	2	PAT_MODES_FCLK[2:0]			LOW_LATENCY_EN	AVG_EN	SEL_PRBS_PAT_FCLK	PAT_MODES[2:0]			SEL_PRBS_PAT_GBL	OFFSET_CORR_DELAY_FROM_TX_TRIG[5:0]						
3	3	SER_DATA_RATE			DIG_GAIN_EN	0	OFFSET_CORR_DELAY_FROM_TX_TRIG[7:6]	DIG_OFFSET_EN	0	0	0	0	0	0	0	0	0	0
4	4	OFFSET_REMOVAL_SELF	OFFSET_REMOVAL_START_SEL	OFFEST_REMOVAL_START_MANUAL	AUTO_OFFSET_REMOVAL_ACC_CYCLES[3:0]			PAT_SELECT_IND	PRBS_SYNC	PRBS_MODE	PRBS_EN	MSB_FIRST	0	0	ADC_RES			
5	5	CUSTOM_PATTERN[15:0]																
7	7	AUTO_OFFSET_REMOVAL_VAL_RD_CH_SEL[4:0]				0	0	0	0	0	0	0	0	0	0	0	0	CHOPPER_EN
8	8	0	0	AUTO_OFFSET_REMOVAL_VAL_RD[13:0]														
11	B	0	0	0	0	EN_DITHER	0	0	0	0	0	0	0	0	0	0	0	
13	D	GAIN_CH1				0	OFFSET_CH1											
14	E	0				0	OFFSET_CH1											
15	F	GAIN_CH2				0	OFFSET_CH2											
16	10	0				0	OFFSET_CH2											
17	11	GAIN_CH3				0	OFFSET_CH3											
18	12	0				0	OFFSET_CH3											
19	13	GAIN_CH4				0	OFFSET_CH4											
20	14	0				0	OFFSET_CH4											
21	15	PAT_PRBS_LVDS1	PAT_PRBS_LVDS2	PAT_PRBS_LVDS3	PAT_PRBS_LVDS4	PAT_LVDS1[2:0]			PAT_LVDS2[2:0]			HPF_ROUND_EN_CH1-8	HPF_CORNER_CH1-4[3:0]			DIG_HPF_EN_CH1-4		
23	17	0	0	0	0	0	0	0	0	PAT_LVDS3[2:0]			PAT_LVDS4[2:0]			0	0	
24	18	PDN_DIG_CH4	PDN_DIG_CH3	PDN_DIG_CH2	PDN_DIG_CH1	PDN_LVDS4	PDN_LVDS3	PDN_LVDS2	PDN_LVDS1	PDN_ANA_CH4	PDN_ANA_CH3	PDN_ANA_CH2	PDN_ANA_CH1	INVERT_CH4	INVERT_CH3	INVERT_CH2	INVERT_CH1	
25	19	GAIN_CH5				0	OFFSET_CH5											
26	1A	0				0	OFFSET_CH5											
27	1B	GAIN_CH6				0	OFFSET_CH6											
28	1C	0				0	OFFSET_CH6											
29	1D	GAIN_CH7				0	OFFSET_CH7											

(1) Default value of all registers is 0.

**Table 26. ADC Register Map (continued)**

REGISTER ADDRESS		REGISTER DATA <sup>(1)</sup>																
DECIMAL	HEX	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
30	1E	0						0	OFFSET_CH7									
31	1F	GAIN_CH8						0	OFFSET_CH8									
32	20	0						0	OFFSET_CH8									
33	21	PAT_PRBS_LVDS5	PAT_PRBS_LVDS6	PAT_PRBS_LVDS7	PAT_PRBS_LVDS8	PAT_LVDS5[2:0]			PAT_LVDS6[2:0]			0	HPF_CORNER_CH5-8[3:0]				DIG_HPF_EN_CH5-8	
35	23	0	0	0	0	0	0	0	0	PAT_LVDS7[2:0]			PAT_LVDS8[2:0]			0	0	
36	24	PDN_DIG_CH8	PDN_DIG_CH7	PDN_DIG_CH6	PDN_DIG_CH5	PDN_LVDS8	PDN_LVDS7	PDN_LVDS6	PDN_LVDS5	PDN_ANA_CH8	PDN_ANA_CH7	PDN_ANA_CH6	PDN_ANA_CH5	INVERT_CH8	INVERT_CH7	INVERT_CH6	INVERT_CH5	
37	25	GAIN_CH9						0	OFFSET_CH9									
38	26	0						0	OFFSET_CH9									
39	27	GAIN_CH10						0	OFFSET_CH10									
40	28	0						0	OFFSET_CH10									
41	29	GAIN_CH11						0	OFFSET_CH11									
42	2A	0						0	OFFSET_CH11									
43	2B	GAIN_CH12						0	OFFSET_CH12									
44	2C	0						0	OFFSET_CH12									
45	2D	PAT_PRBS_LVDS9	PAT_PRBS_LVDS10	PAT_PRBS_LVDS11	PAT_PRBS_LVDS12	PAT_LVDS9[2:0]			PAT_LVDS10[2:0]			HPF_ROU_ND_EN_CH1-8	HPF_CORNER_CH9-12[3:0]				DIG_HPF_EN_CH9-12	
47	2F	0	0	0	0	0	0	0	0	PAT_LVDS11[2:0]			PAT_LVDS12[2:0]			0	0	
48	30	PDN_DIG_CH12	PDN_DIG_CH11	PDN_DIG_CH10	PDN_DIG_CH9	PDN_LVDS12	PDN_LVDS11	PDN_LVDS10	PDN_LVDS9	PDN_ANA_CH12	PDN_ANA_CH11	PDN_ANA_CH10	PDN_ANA_CH9	INVERT_CH12	INVERT_CH11	INVERT_CH10	INVERT_CH9	
49	31	GAIN_CH13						0	OFFSET_CH13									
50	32	0						0	OFFSET_CH13									
51	33	GAIN_CH14						0	OFFSET_CH14									
52	34	0						0	OFFSET_CH14									
53	35	GAIN_CH15						0	OFFSET_CH15									
54	36	0						0	OFFSET_CH15									
55	37	GAIN_CH16						0	OFFSET_CH16									
56	38	0						0	OFFSET_CH16									
57	39	PAT_PRBS_LVDS13	PAT_PRBS_LVDS14	PAT_PRBS_LVDS15	PAT_PRBS_LVDS16	PAT_LVDS13[2:0]			PAT_LVDS14[2:0]			0	HPF_CORNER_CH13-16[3:0]				DIG_HPF_EN_CH13-16	
59	3B	0	0	0	0	0	0	0	0	PAT_LVDS15[2:0]			PAT_LVDS16[2:0]			0	0	
60	3C	PDN_DIG_CH16	PDN_DIG_CH15	PDN_DIG_CH14	PDN_DIG_CH13	PDN_LVDS16	PDN_LVDS15	PDN_LVDS14	PDN_LVDS13	PDN_ANA_CH16	PDN_ANA_CH15	PDN_ANA_CH14	PDN_ANA_CH13	INVERT_CH16	INVERT_CH15	INVERT_CH14	INVERT_CH13	
65	41	PLLRST1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
66	42	PLLRST2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
67	43	0	0	0	0	0	0	0	0	0	0	0	LVDS_DCLK_DELAY_PROG[3:0]				0	

### 13.1.2.1 Description of ADC Registers

#### 13.1.2.1.1 Register 1 (address = 1h)

**Figure 116. Register 1**

15	14	13	12	11	10	9	8
0	LVDS_RATE_2X	0	0	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
0	0	DIS_LVDS	1	0	1	0	GLOBAL_PDN
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; -n = value after reset

**Table 27. Register 1 Field Descriptions**

Bit	Field	Type	Reset	Description
15	0	R/W	0h	Must write 0
14	LVDS_RATE_2X	R/W	0h	0 = 1X rate; normal operation (default) 1 = 2X rate. This setting combines the data of two LVDS pairs into a single LVDS pair. This feature can be used when the ADC clock rate is low; see the <a href="#">LVDS Interface</a> section for further details.
13-6	0	R/W	0h	Must write 0
5	DIS_LVDS	R/W	0h	0 = LVDS interface is enabled (default) 1 = LVDS interface is disabled
4	1	R/W	0h	Must write 1
3	0	R/W	0h	Must write 0
2	1	R/W	0h	Must write 1
1	0	R/W	0h	Must write 0
0	GLOBAL_PDN	R/W	0h	0 = Device operates in normal mode (default) 1 = ADC enters complete power-down mode

13.1.2.1.2 Register 2 (address = 2h)

Figure 117. Register 2

15		14		13		12		11		10		9		8	
PAT_MODES_FCLK[2:0]				LOW_LATENCY_EN		AVG_EN		SEL_PRBS_PAT_FCLK		PAT_MODES[2:0]					
R/W-0h				R/W-0h		R/W-0h		R/W-0h		R/W-0h					
7		6		5		4		3		2		1		0	
PAT_MODES[2:0]		SEL_PRBS_PAT_GBL		OFFSET_CORR_DELAY_FROM_TX_TRIG[5:0]											
R/W-0h		R/W-0h		R/W-0h											

LEGEND: R/W = Read/Write; -n = value after reset

Table 28. Register 2 Field Descriptions

Bit	Field	Type	Reset	Description
15-13	PAT_MODES_FCLK[2:0]	R/W	0h	These bits enable different test patterns on the frame clock line; see <a href="#">Table 29</a> for bit descriptions and the <a href="#">Test Patterns</a> section for further details.
12	LOW_LATENCY_EN	R/W	0h	0 = Default latency with digital features supported 1 = Low latency with digital features bypassed
11	AVG_EN	R/W	0h	0 = No averaging 1 = Enables averaging of two channels to improve signal-to-noise ratio (SNR); see the <a href="#">LVDS Interface</a> section for further details.
10	SEL_PRBS_PAT_FCLK	R/W	0h	0 = Normal operation 1 = Enables the PRBS pattern to be generated on f <sub>CLK</sub> ; see the <a href="#">Test Patterns</a> section for further details
9-7	PAT_MODES[2:0]	R/W	0h	These bits enable different test patterns on the LVDS data lines; see <a href="#">Table 29</a> for bit descriptions and the <a href="#">Test Patterns</a> section for further details.
6	SEL_PRBS_PAT_GBL	R/W	0h	0 = Normal operation 1 = Enables the PRBS pattern to be generated; see the <a href="#">Test Patterns</a> section for further details
5-0	OFFSET_CORR_DELAY_FROM_TX_TRIG[5:0]	R/W	0h	This 8-bit register initiates an offset correction after the TX_TRIG input pulse (each step is equivalent to one sample delay); the remaining two MSB bits are the OFFSET_CORR_DELAY_FROM_TX_TRIG[7:6] bits (bits 10-9) in register 3.

Table 29. Pattern Mode Bit Description

PAT_MODES[2:0]	DESCRIPTION
000	Normal operation
001	Sync (half frame 1, half frame 0)
010	Alternate 0s and 1s
011	Custom pattern <sup>(1)</sup>
100	All 1s
101	Toggle mode
110	All 0s
111	Ramp pattern <sup>(1)</sup>

(1) Either the custom or the ramp pattern setting is required for PRBS pattern selection.

**13.1.2.1.3 Register 3 (address = 3h)**
**Figure 118. Register 3**

15			14			13			12			11			10			9			8		
SER_DATA_RATE						DIG_GAIN_EN			0			OFFSET_CORR_DELAY_FROM_TX_TRIG[7:6]						DIG_OFFSET_EN					
R/W-0h						R/W-0h			R/W-0h			R/W-0h						R/W-0h					
7			6			5			4			3			2			1			0		
0			0			0			0			0			0			0			0		
R/W-0h			R/W-0h			R/W-0h			R/W-0h			R/W-0h			R/W-0h			R/W-0h			R/W-0h		

LEGEND: R/W = Read/Write; -n = value after reset

**Table 30. Register 3 Field Descriptions**

Bit	Field	Type	Reset	Description
15-13	SER_DATA_RATE	R/W	0h	These bits control the LVDS serialization rate. 000 = 12X 001 = 14X 100 = 16X 101, 110, 111, 010, 011 = Unused
12	DIG_GAIN_EN	R/W	0h	0 = Digital gain disabled 1 = Digital gain enabled
11	0	R/W	0h	Must write 0
10-9	OFFSET_CORR_DELAY_FROM_TX_TRIG[7:6]	R/W	0h	This 8-bit register initiates an offset correction after the TX_TRIG input pulse (each step is equivalent to one sample delay); the remaining six LSB bits are the OFFSET_CORR_DELAY_FROM_TX_TRIG[5:0] bits (bits 5-0) in register 2.
8	DIG_OFFSET_EN	R/W	0h	0 = Digital offset subtraction disabled 1 = Digital offset subtraction enabled
7-0	0	R/W	0h	Must write 0

**13.1.2.1.4 Register 4 (address = 4h)**
**Figure 119. Register 4**

15	14	13	12	11	10	9	8
OFFSET_REM_OVAL_SELF	OFFSET_REM_OVAL_START_SEL	OFFSET_REM_OVAL_START_MANUAL	AUTO_OFFSET_REMOVAL_ACC_CYCLES			PAT_SELECT_IND	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
PRBS_SYNC	PRBS_MODE	PRBS_EN	MSB_FIRST	0	0	ADC_RES	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	

LEGEND: R/W = Read/Write; -n = value after reset

**Table 31. Register 4 Field Descriptions**

Bit	Field	Type	Reset	Description
15	OFFSET_REMOVAL_SELF	R/W	0h	0 = Auto offset correction mode is enabled 1 = Offset correction via register is enabled
14	OFFSET_REMOVAL_START_SEL	R/W	0h	0 = Auto offset correction is initiated when the OFFSET_REMOVAL_START_MANUAL bit is set to 1 1 = Auto offset correction is initiated with a pulse on the TX_TRIG pin
13	OFFSET_REMOVAL_START_MANUAL	R/W	0h	This bit initiates an offset correction manually instead of with a TX_TRIG pulse
12-9	AUTO_OFFSET_REMOVAL_ACC_CYCLES	R/W	0h	These bits define the number of samples required to generate an offset in auto offset correction mode
8	PAT_SELECT_IND	R/W	0h	0 = All LVDS output lines have the same pattern, as determined by the PAT_MODES[2:0] bits 1 = Different test patterns can be sent on different LVDS lines, depending upon the channel and register; see the <a href="#">Test Patterns</a> section for further details
7	PRBS_SYNC	R/W	0h	0 = Normal operation 1 = PRBS generator is in a reset state
6	PRBS_MODE	R/W	0h	0 = 23-bit PRBS generator 1 = 9-bit PRBS generator
5	PRBS_EN	R/W	0h	0 = PRBS sequence generation block disabled 1 = PRBS sequence generation block enabled; see the <a href="#">Test Patterns</a> section for further details
4	MSB_FIRST	R/W	0h	0 = The LSB is transmitted first on serialized output data 1 = The MSB is transmitted first on serialized output data
3	0	R/W	0h	Must write 0
2	0	R/W	0h	Must write 0
1-0	ADC_RES	R/W	0h	These bits control the ADC resolution. 00 = 12-bit resolution 01 = 14-bit resolution 10, 11 = Unused

**13.1.2.1.5 Register 5 (address = 5h)**
**Figure 120. Register 5**

15	14	13	12	11	10	9	8
CUSTOM_PATTERN[15:0]							
R/W-0h							
7	6	5	4	3	2	1	0
CUSTOM_PATTERN[13:0]							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 32. Register 5 Field Descriptions**

Bit	Field	Type	Reset	Description
15-0	CUSTOM_PATTERN[15:0]	R/W	0h	If the pattern mode is programmed to a custom pattern mode, then the custom pattern value can be provided by programming these bits; see the <a href="#">Test Patterns</a> section for further details.

**13.1.2.1.6 Register 7 (address = 7h)**
**Figure 121. Register 7**

15	14	13	12	11	10	9	8	
AUTO_OFFSET_REMOVAL_VAL_RD_CH_SEL						0	0	0
R/W-0h						R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0	
0	0	0	0	0	0	0	CHOPPER_EN	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	

LEGEND: R/W = Read/Write; -n = value after reset

**Table 33. Register 7 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	AUTO_OFFSET_REMOVAL_VAL_RD_CH_SEL	R/W	0h	Write the channel number to read the offset value in auto offset correction mode for a corresponding channel number (read the offset value in register 8, bits 13-0)
10-1	0	R/W	0h	Must write 0
0	CHOPPER_EN	R/W	0h	The chopper can be used to move low-frequency, $1/f$ noise to an $f_s/2$ frequency. 0 = Chopper disabled 1 = Chopper enabled

**13.1.2.1.7 Register 8 (address = 8h)**
**Figure 122. Register 8**

15	14	13	12	11	10	9	8
0	0	AUTO_OFFSET_REMOVAL_VAL_RD[13:0]					
R/W-0h	R/W-0h	R/W-0h					
7	6	5	4	3	2	1	0
AUTO_OFFSET_REMOVAL_VAL_RD[13:0]							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 34. Register 8 Field Descriptions**

Bit	Field	Type	Reset	Description
15-14	0	R/W	0h	Must write 0
13-0	AUTO_OFFSET_REMOVAL_VAL_RD	R/W	0h	Read the offset value applied in auto offset correction mode for a specific channel number as defined in the AUTO_OFFSET_REMOVAL_VAL_RD_CH_SEL[4:0] register bit.

**13.1.2.1.8 Register 11 (address = Bh)**
**Figure 123. Register 11**

15	14	13	12	11	10	9	8
0	0	0	0	EN_DITHER	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
0	0	0	0	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; -n = value after reset

**Table 35. Register 11 Field Descriptions**

Bit	Field	Type	Reset	Description
15-12	0	R/W	0h	Must write 0
11	EN_DITHER	R/W	0h	Dither can be used to remove higher-order harmonics. 0 = Dither disabled 1 = Dither enabled Note: Enabling the dither converts higher-order harmonics power in noise. Thus, enabling this mode removes harmonics but degrades SNR.
10-0	0	R/W	0h	Must write 0



**13.1.2.1.9 Register 13 (address = Dh)**
**Figure 124. Register 13**

15	14	13	12	11	10	9	8
GAIN_CH1					0	OFFSET_CH1	
R/W-0h					R/W-0h		R/W-0h
7	6	5	4	3	2	1	0
OFFSET_CH1							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 36. Register 13 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH1	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 1 can be obtained with this register. For an <i>N</i> value (decimal equivalent of binary) written to these bits, the digital gain gets set to $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH1	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 1 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 14, bits 9-0.

**13.1.2.1.10 Register 14 (address = Eh)**
**Figure 125. Register 14**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH1	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH1							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 37. Register 14 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH1	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, then the offset value for channel 1 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 13, bits 9-0.

**13.1.2.1.11 Register 15 (address = Fh)**
**Figure 126. Register 15**

15	14	13	12	11	10	9	8
GAIN_CH2					0	OFFSET_CH2	
R/W-0h					R/W-0h		R/W-0h
7	6	5	4	3	2	1	0
OFFSET_CH2							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 38. Register 15 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH2	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 2 can be obtained with this register. For an <i>N</i> value (decimal equivalent of binary) written to these bits, the digital gain gets set to $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH2	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 2 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 16, bits 9-0.

**13.1.2.1.12 Register 16 (address = 10h)**
**Figure 127. Register 16**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH2	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH2							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 39. Register 16 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH2	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 2 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 15, bits 9-0.

**13.1.2.1.13 Register 17 (address = 11h)**
**Figure 128. Register 17**

15	14	13	12	11	10	9	8
GAIN_CH3					0	OFFSET_CH3	
R/W-0h					R/W-0h		R/W-0h
7	6	5	4	3	2	1	0
OFFSET_CH3							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 40. Register 17 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH3	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 3 can be obtained with this register. For an $N$ value (decimal equivalent of binary) written to these bits, the digital gain gets set to $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH3	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 3 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 18, bits 9-0.

**13.1.2.1.14 Register 18 (address = 12h)**
**Figure 129. Register 18**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH3	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH3							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 41. Register 18 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH3	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 3 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 17, bits 9-0.

**13.1.2.1.15 Register 19 (address = 13h)**
**Figure 130. Register 19**

15	14	13	12	11	10	9	8
GAIN_CH4					0	OFFSET_CH4	
R/W-0h					R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH4							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 42. Register 19 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH4	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 4 can be obtained with this register. For an <i>N</i> value (decimal equivalent of binary) written to these bits, the digital gain gets set to $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH4	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 4 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 20, bits 9-0.

**13.1.2.1.16 Register 20 (address = 14h)**
**Figure 131. Register 20**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH4	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH4							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 43. Register 20 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH4	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 4 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 19, bits 9-0.

**13.1.2.1.17 Register 21 (address = 15h)**
**Figure 132. Register 21**

15		14		13		12		11		10		9		8	
PAT_PRBS_LVDS1		PAT_PRBS_LVDS2		PAT_PRBS_LVDS3		PAT_PRBS_LVDS4		PAT_LVDS1[2:0]				PAT_LVDS2[2:0]			
R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h				R/W-0h			
7		6		5		4		3		2		1		0	
PAT_LVDS2[2:0]				HPF_ROUND_EN_CH1-8		HPF_CORNER_CH1-4[3:0]						DIG_HPF_EN_CH1-4			
R/W-0h				R/W-0h		R/W-0h						R/W-0h			

LEGEND: R/W = Read/Write; -n = value after reset

**Table 44. Register 21 Field Descriptions**

Bit	Field	Type	Reset	Description
15	PAT_PRBS_LVDS1	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 1 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
14	PAT_PRBS_LVDS2	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 2 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
13	PAT_PRBS_LVDS3	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 3 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
12	PAT_PRBS_LVDS4	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 4 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
11-9	PAT_LVDS1[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the different pattern on LVDS output 1 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
8-6	PAT_LVDS2[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the different pattern on LVDS output 2 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
5	HPF_ROUND_EN_CH1-8	R/W	0h	0 = Rounding in the ADC HPF is disabled for channel 1 to 8. HPF output is truncated to be mapped to the ADC resolution bits. 1 = HPF output of channel 1 to 8 is mapped to the ADC resolution bits by the round-off operation.
4-1	HPF_CORNER_CH1-4[3:0]	R/W	0h	When the DIG_HPF_EN_CH1-4 bit is set to 1, the digital HPF characteristic for the corresponding channels can be programmed by setting the value of $k$ with these bits. Characteristics of a digital high-pass transfer function applied to the output data for a given value of $k$ is defined by: $Y(n) = \frac{2^k}{2^k + 1} [x(n) - x(n - 1) + y(n - 1)]$ Note that the value of $k$ can be from 2 to 10 (0010b to 1010b); see the <a href="#">Digital HPF</a> section for further details.
0	DIG_HPF_EN_CH1-4	R/W	0h	0 = Digital HPF disabled for channels 1 to 4 (default) 1 = Enables digital HPF for channels 1 to 4

**Table 45. Pattern Mode Bit Description**

PAT_MODES[2:0]	DESCRIPTION
000	Normal operation
001	Sync (half frame 0, half frame 1)
010	Alternate 0s and 1s
011	Custom pattern
100	All 1s
101	Toggle mode
110	All 0s
111	Ramp pattern

**13.1.2.1.18 Register 23 (address = 17h)**
**Figure 133. Register 23**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
PAT_LVDS3[2:0]			PAT_LVDS4[2:0]			0	0
R/W-0h			R/W-0h			R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; -n = value after reset

**Table 46. Register 23 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	0	R/W	0h	Must write 0
7-5	PAT_LVDS3[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the different pattern on LVDS output 3 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
4-2	PAT_LVDS4[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the different pattern on LVDS output 4 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
1-0	0	R/W	0h	Must write 0

**13.1.2.1.19 Register 24 (address = 18h)**
**Figure 134. Register 24**

15		14		13		12		11		10		9		8	
PDN_DIG_CH4	PDN_DIG_CH3	PDN_DIG_CH2	PDN_DIG_CH1	PDN_LVDS4	PDN_LVDS3	PDN_LVDS2	PDN_LVDS1								
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h								
7		6		5		4		3		2		1		0	
PDN_ANA_CH4	PDN_ANA_CH3	PDN_ANA_CH2	PDN_ANA_CH1	INVERT_CH4	INVERT_CH3	INVERT_CH2	INVERT_CH1								
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h								

LEGEND: R/W = Read/Write; -n = value after reset

**Table 47. Register 24 Field Descriptions**

Bit	Field	Type	Reset	Description
15	PDN_DIG_CH4	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel 4
14	PDN_DIG_CH3	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel 3
13	PDN_DIG_CH2	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel2
12	PDN_DIG_CH1	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel 1
11	PDN_LVDS4	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 4
10	PDN_LVDS3	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 3
9	PDN_LVDS2	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 2
8	PDN_LVDS1	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 1
7	PDN_ANA_CH4	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 4
6	PDN_ANA_CH3	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 3
5	PDN_ANA_CH2	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 2
4	PDN_ANA_CH1	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 1
3	INVERT_CH4	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 4 <sup>(1)</sup>
2	INVERT_CH3	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 3 <sup>(1)</sup>
1	INVERT_CH2	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 2 <sup>(1)</sup>
0	INVERT_CH1	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 1 <sup>(1)</sup>

(1) Has no effect on test patterns.

**13.1.2.1.20 Register 25 (address = 19h)**
**Figure 135. Register 25**

15	14	13	12	11	10	9	8
GAIN_CH5					0	OFFSET_CH5	
R/W-0h					R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH5							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 48. Register 25 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH5	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 5 can be obtained with this register. For an <i>N</i> value (decimal equivalent of binary) written to these bits, the digital gain gets set to $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH5	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 5 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 26, bits 9-0.

**13.1.2.1.21 Register 26 (address = 1Ah)**
**Figure 136. Register 26**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH5	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH5							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 49. Register 26 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH5	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 5 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 25, bits 9-0.



**13.1.2.1.22 Register 27 (address = 1Bh)**
**Figure 137. Register 27**

15	14	13	12	11	10	9	8
GAIN_CH6					0	OFFSET_CH6	
R/W-0h					R/W-0h		R/W-0h
7	6	5	4	3	2	1	0
OFFSET_CH6							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 50. Register 27 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH6	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 6 can be obtained with this register. For an <i>N</i> value (decimal equivalent of binary) written to these bits, the digital gain gets set to $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH6	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 6 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 28, bits 9-0.

**13.1.2.1.23 Register 28 (address = 1Ch)**
**Figure 138. Register 28**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH6	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH6							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 51. Register 28 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH6	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 6 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 27, bits 9-0.

**13.1.2.1.24 Register 29 (address = 1Dh)**
**Figure 139. Register 29**

15	14	13	12	11	10	9	8
GAIN_CH7					0	OFFSET_CH7	
R/W-0h					R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH7							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 52. Register 29 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH7	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 7 can be obtained with this register. For an <i>N</i> value (decimal equivalent of binary) written to these bits, the digital gain gets set to $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH7	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 7 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 30, bits 9-0.

**13.1.2.1.25 Register 30 (address = 1Eh)**
**Figure 140. Register 30**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH7	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH7							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 53. Register 30 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH7	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 7 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 29, bits 9-0.

**13.1.2.1.26 Register 31 (address = 1Fh)**
**Figure 141. Register 31**

15	14	13	12	11	10	9	8
GAIN_CH8					0	OFFSET_CH8	
R/W-0h					R/W-0h		R/W-0h
7	6	5	4	3	2	1	0
OFFSET_CH8							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 54. Register 31 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH8	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 8 can be obtained with this register. For an <i>N</i> value (decimal equivalent of binary) written to these bits, the digital gain gets set to $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH8	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 8 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 32, bits 9-0.

**13.1.2.1.27 Register 32 (address = 20h)**
**Figure 142. Register 32**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH8	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH8							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 55. Register 32 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH8	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 16 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 31, bits 9-0.

13.1.2.1.28 Register 33 (address = 21h)

Figure 143. Register 33

15		14		13		12		11		10		9		8	
PAT_PRBS_LVDS5		PAT_PRBS_LVDS6		PAT_PRBS_LVDS7		PAT_PRBS_LVDS8		PAT_LVDS5[2:0]				PAT_LVDS6[2:0]			
R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h				R/W-0h			
7		6		5		4		3		2		1		0	
PAT_LVDS6[2:0]				0		HPF_CORNER_CH5-8[3:0]				DIG_HPF_EN_CH5-8					
R/W-0h				R/W-0h		R/W-0h				R/W-0h					

LEGEND: R/W = Read/Write; -n = value after reset

Table 56. Register 33 Field Descriptions

Bit	Field	Type	Reset	Description
15	PAT_PRBS_LVDS5	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 5 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
14	PAT_PRBS_LVDS6	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 6 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
13	PAT_PRBS_LVDS7	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 7 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
12	PAT_PRBS_LVDS8	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 8 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
11-9	PAT_LVDS5[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the different pattern on LVDS output 5 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
8-6	PAT_LVDS6[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the different pattern on LVDS output 6 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
5	0	R/W	0h	Must write 0
4-1	HPF_CORNER_CH5-8[3:0]	R/W	0h	When the DIG_HPF_EN_CH5-8 bit is set to 1, the digital HPF characteristic for the corresponding channels can be programmed by setting the value of $k$ with these bits. Characteristics of a digital high-pass transfer function applied to the output data for a given value of $k$ is defined by: $Y(n) = \frac{2^k}{2^k + 1} [x(n) - x(n - 1) + y(n - 1)]$ Note that the value of $k$ can be from 2 to 10 (0010b to 1010b); see the <a href="#">Digital HPF</a> section for further details.
0	DIG_HPF_EN_CH5-8	R/W	0h	0 = Digital HPF disabled for channels 5 to 8 (default) 1 = Enables digital HPF for channels 5 to 8 <sup>(1)</sup>

(1) Should be set same as DIG\_HPF\_EN\_CH1-4

**13.1.2.1.29 Register 35 (address = 23h)**
**Figure 144. Register 35**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
PAT_LVDS7[2:0]			PAT_LVDS8[2:0]			0	0
R/W-0h			R/W-0h			R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; -n = value after reset

**Table 57. Register 35 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	0	R/W	0h	Must write 0
7-5	PAT_LVDS7[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the different pattern on LVDS output 7 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
4-2	PAT_LVDS8[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the different pattern on LVDS output 8 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
1-0	0	R/W	0h	Must write 0

13.1.2.1.30 Register 36 (address = 24h)

Figure 145. Register 36

15		14		13		12		11		10		9		8	
PDN_DIG_CH8	PDN_DIG_CH7	PDN_DIG_CH6	PDN_DIG_CH5	PDN_LVDS8	PDN_LVDS7	PDN_LVDS6	PDN_LVDS5								
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h								
7		6		5		4		3		2		1		0	
PDN_ANA_CH8	PDN_ANA_CH7	PDN_ANA_CH6	PDN_ANA_CH5	INVERT_CH8	INVERT_CH7	INVERT_CH6	INVERT_CH5								
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h								

LEGEND: R/W = Read/Write; -n = value after reset

Table 58. Register 36 Field Descriptions

Bit	Field	Type	Reset	Description
15	PDN_DIG_CH8	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel 8
14	PDN_DIG_CH7	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel 7
13	PDN_DIG_CH6	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel 6
12	PDN_DIG_CH5	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel 5
11	PDN_LVDS8	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 8
10	PDN_LVDS7	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 7
9	PDN_LVDS6	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 6
8	PDN_LVDS5	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 5
7	PDN_ANA_CH8	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 8
6	PDN_ANA_CH7	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 7
5	PDN_ANA_CH6	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 6
4	PDN_ANA_CH5	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 5
3	INVERT_CH8	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 8 <sup>(1)</sup>
2	INVERT_CH7	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 7 <sup>(1)</sup>
1	INVERT_CH6	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 6 <sup>(1)</sup>
0	INVERT_CH5	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 5 <sup>(1)</sup>

(1) Has no effect on test patterns.

**13.1.2.1.31 Register 37 (address = 25h)**
**Figure 146. Register 37**

15	14	13	12	11	10	9	8
GAIN_CH9					0	OFFSET_CH9	
R/W-0h					R/W-0h		R/W-0h
7	6	5	4	3	2	1	0
OFFSET_CH9							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 59. Register 37 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH9	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 9 can be obtained with this register. For an $N$ value (decimal equivalent of binary) written to these bits, the digital gain gets set to $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH9	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 9 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 38, bits 9-0.

**13.1.2.1.32 Register 38 (address = 26h)**
**Figure 147. Register 38**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH9	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH9							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 60. Register 38 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH9	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 9 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 37, bits 9-0.

**13.1.2.1.33 Register 39 (address = 27h)**
**Figure 148. Register 39**

15	14	13	12	11	10	9	8
GAIN_CH10					0	OFFSET_CH10	
R/W-0h					R/W-0h		R/W-0h
7	6	5	4	3	2	1	0
OFFSET_CH10							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 61. Register 39 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH10	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 10 can be obtained with this register. For an <i>N</i> value (decimal equivalent of binary) written to these bits, the digital gain gets set to $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH10	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 10 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 40, bits 9-0.

**13.1.2.1.34 Register 40 (address = 28h)**
**Figure 149. Register 40**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH10	
R/W-0h		R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH10							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 62. Register 40 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH10	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 10 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 39, bits 9-0.



**13.1.2.1.35 Register 41 (address = 29h)**
**Figure 150. Register 41**

15	14	13	12	11	10	9	8
GAIN_CH11					0	OFFSET_CH11	
R/W-0h					R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH11							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 63. Register 41 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH11	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 11 can be obtained with this register. For an <i>N</i> value (decimal equivalent of binary) written to these bits, the digital gain gets set $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH11	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 11 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 42, bits 9-0.

**13.1.2.1.36 Register 42 (address = 2Ah)**
**Figure 151. Register 42**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH11	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH11							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 64. Register 42 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH11	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 11 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 41, bits 9-0.

**13.1.2.1.37 Register 43 (address = 2Bh)**
**Figure 152. Register 43**

15	14	13	12	11	10	9	8
GAIN_CH12					0	OFFSET_CH12	
R/W-0h					R/W-0h		R/W-0h
7	6	5	4	3	2	1	0
OFFSET_CH12							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 65. Register 43 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH12	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 12 can be obtained with this register. For an <i>N</i> value (decimal equivalent of binary) written to these bits, the digital gain gets set to $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH12	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 12 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 44, bits 9-0.

**13.1.2.1.38 Register 44 (address = 2Ch)**
**Figure 153. Register 44**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH12	
R/W-0h		R/W-0h		R/W-0h		R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH12							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 66. Register 44 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH12	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 12 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 43, bits 9-0.

**13.1.2.1.39 Register 45 (address = 2Dh)**
**Figure 154. Register 45**

15		14		13		12		11		10		9		8	
PAT_PRBS_LVDS9		PAT_PRBS_LVDS10		PAT_PRBS_LVDS11		PAT_PRBS_LVDS12		PAT_LVDS9[2:0]				PAT_LVDS10[2:0]			
R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h				R/W-0h			
7		6		5		4		3		2		1		0	
PAT_LVDS10[2:0]				HPF_ROUND_EN_CH9-16		HPF_CORNER_CH9-12[3:0]						DIG_HPF_EN_CH9-12			
R/W-0h				R/W-0h		R/W-0h						R/W-0h			

LEGEND: R/W = Read/Write; -n = value after reset

**Table 67. Register 45 Field Descriptions**

Bit	Field	Type	Reset	Description
15	PAT_PRBS_LVDS9	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 9 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
14	PAT_PRBS_LVDS10	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 10 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
13	PAT_PRBS_LVDS11	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 11 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
12	PAT_PRBS_LVDS12	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 12 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
11-9	PAT_LVDS9[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the different pattern on LVDS output 9 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
8-6	PAT_LVDS10[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the different pattern on LVDS output 10 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
5	HPF_ROUND_EN_CH9-16	R/W	0h	0 = Rounding in the ADC HPF is disabled for channels 9-16. The HPF output is truncated to be mapped to the ADC resolution bits. 1 = HPF output of channels 9-16 is mapped to the ADC resolution bits by the round-off operation.
4-1	HPF_CORNER_CH9-12[3:0]	R/W	0h	When the DIG_HPF_EN_CH9-12 bit is set to 1, the digital HPF characteristic for the corresponding channels can be programmed by setting the value of $k$ with these bits. Characteristics of a digital high-pass transfer function applied to the output data for a given value of $k$ is defined by: $Y(n) = \frac{2^k}{2^k + 1} [x(n) - x(n - 1) + y(n - 1)]$ Note that the value of $k$ can be from 2 to 10 (0010b to 1010b); see the <a href="#">Digital HPF</a> section for further details.
0	DIG_HPF_EN_CH9-12	R/W	0h	0 = Digital HPF disabled for channels 9 to 12 (default) 1 = Enables digital HPF for channels 9 to 12

**13.1.2.1.40 Register 47 (address = 2Fh)**
**Figure 155. Register 47**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
PAT_LVDS11[2:0]			PAT_LVDS12[2:0]			0	0
R/W-0h			R/W-0h			R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; -n = value after reset

**Table 68. Register 47 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	0	R/W	0h	Must write 0
7-5	PAT_LVDS11[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the different pattern on LVDS output 11 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
4-2	PAT_LVDS12[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the different pattern on LVDS output 12 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
1-0	0	R/W	0h	Must write 0

**13.1.2.1.41 Register 48 (address = 30h)**
**Figure 156. Register 48**

15		14		13		12		11		10		9		8	
PDN_DIG_	CH12	PDN_DIG_	CH11	PDN_DIG_	CH10	PDN_DIG_	CH9	PDN_LVDS12		PDN_LVDS11		PDN_LVDS10		PDN_LVDS9	
R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h	
7		6		5		4		3		2		1		0	
PDN_ANA_	CH12	PDN_ANA_	CH11	PDN_ANA_	CH10	PDN_ANA_	CH9	INVERT_	CH12	INVERT_	CH11	INVERT_	CH10	INVERT_	CH9
R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h	

LEGEND: R/W = Read/Write; -n = value after reset

**Table 69. Register 48 Field Descriptions**

Bit	Field	Type	Reset	Description
15	PDN_DIG_CH12	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel 12
14	PDN_DIG_CH11	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel 11
13	PDN_DIG_CH10	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel 10
12	PDN_DIG_CH9	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel 9
11	PDN_LVDS12	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 12
10	PDN_LVDS11	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 11
9	PDN_LVDS10	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 10
8	PDN_LVDS9	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 9
7	PDN_ANA_CH12	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 12
6	PDN_ANA_CH11	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 11
5	PDN_ANA_CH10	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 10
4	PDN_ANA_CH9	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 9
3	INVERT_CH12	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 12 <sup>(1)</sup>
2	INVERT_CH11	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 11 <sup>(1)</sup>
1	INVERT_CH10	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 10 <sup>(1)</sup>
0	INVERT_CH9	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 9 <sup>(1)</sup>

(1) Has no effect on test patterns.

**13.1.2.1.42 Register 49 (address = 31h)**
**Figure 157. Register 49**

15	14	13	12	11	10	9	8
GAIN_CH13					0	OFFSET_CH13	
R/W-0h					R/W-0h		R/W-0h
7	6	5	4	3	2	1	0
OFFSET_CH13							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 70. Register 49 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH13	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 13 can be obtained with this register. For an <i>N</i> value (decimal equivalent of binary) written to these bits, the digital gain gets set to $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH13	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 13 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 50, bits 9-0.

**13.1.2.1.43 Register 50 (address = 32h)**
**Figure 158. Register 50**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH13	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH13							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 71. Register 50 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH13	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 13 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 49, bits 9-0.

**13.1.2.1.44 Register 51 (address = 33h)**
**Figure 159. Register 51**

15	14	13	12	11	10	9	8
GAIN_CH14					0	OFFSET_CH14	
R/W-0h					R/W-0h		R/W-0h
7	6	5	4	3	2	1	0
OFFSET_CH14							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 72. Register 51 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH14	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 14 can be obtained with this register. For an <i>N</i> value (decimal equivalent of binary) written to these bits, the digital gain gets set to $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH14	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 14 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 52, bits 9-0.

**13.1.2.1.45 Register 52 (address = 34h)**
**Figure 160. Register 52**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH14	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH14							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 73. Register 52 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH14	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 14 can be obtained with this 10-bit register. The offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 51, bits 9-0.

**13.1.2.1.46 Register 53 (address = 35h)**
**Figure 161. Register 53**

15	14	13	12	11	10	9	8
GAIN_CH15					0	OFFSET_CH15	
R/W-0h					R/W-0h		R/W-0h
7	6	5	4	3	2	1	0
OFFSET_CH15							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 74. Register 53 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH15	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 15 can be obtained with this register. For an <i>N</i> value (decimal equivalent of binary) written to these bits, the digital gain gets set to $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH15	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 15 can be obtained with this 10-bit register. the offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 54, bits 9-0.

**13.1.2.1.47 Register 54 (address = 36h)**
**Figure 162. Register 54**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH15	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH15							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 75. Register 54 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH15	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 15 can be obtained with this 10-bit register. the offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 53, bits 9-0.



**13.1.2.1.48 Register 55 (address = 37h)**
**Figure 163. Register 55**

15	14	13	12	11	10	9	8
GAIN_CH16					0	OFFSET_CH16	
R/W-0h					R/W-0h		R/W-0h
7	6	5	4	3	2	1	0
OFFSET_CH16							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 76. Register 55 Field Descriptions**

Bit	Field	Type	Reset	Description
15-11	GAIN_CH16	R/W	0h	When the DIG_GAIN_EN bit is set to 1, the digital gain value for channel 16 can be obtained with this register. For an <i>N</i> value (decimal equivalent of binary) written to these bits, the digital gain gets set to $N \times 0.2$ dB.
10	0	R/W	0h	Must write 0
9-0	OFFSET_CH16	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 16 can be obtained with this 10-bit register. the offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 56, bits 9-0.

**13.1.2.1.49 Register 56 (address = 38h)**
**Figure 164. Register 56**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	OFFSET_CH16	
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
OFFSET_CH16							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 77. Register 56 Field Descriptions**

Bit	Field	Type	Reset	Description
15-10	0	R/W	0h	Must write 0
9-0	OFFSET_CH16	R/W	0h	When the DIG_OFFSET_EN bit is set to 1, the offset value for channel 16 can be obtained with this 10-bit register. the offset value is in twos complement format and its LSB corresponds to a 14-bit LSB. Write the same offset value in register 55, bits 9-0.

13.1.2.1.50 Register 57 (address = 39h)

Figure 165. Register 57

15		14		13		12		11		10		9		8	
PAT_PRBS_LVDS13		PAT_PRBS_LVDS14		PAT_PRBS_LVDS15		PAT_PRBS_LVDS16		PAT_LVDS13[2:0]				PAT_LVDS14[2:0]			
R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h				R/W-0h			
7		6		5		4		3		2		1		0	
PAT_LVDS14[2:0]				0		HPF_CORNER_CH13-16[3:0]						DIG_HPF_EN_CH13-16			
R/W-0h				R/W-0h		R/W-0h						R/W-0h			

LEGEND: R/W = Read/Write; -n = value after reset

Table 78. Register 57 Field Descriptions

Bit	Field	Type	Reset	Description
15	PAT_PRBS_LVDS13	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 13 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
14	PAT_PRBS_LVDS14	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 14 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
13	PAT_PRBS_LVDS15	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 15 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
12	PAT_PRBS_LVDS16	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the PRBS pattern on LVDS output 16 can be enabled with this bit; see the <a href="#">Test Patterns</a> section for further details.
11-9	PAT_LVDS13[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the different pattern on LVDS output 13 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
8-6	PAT_LVDS14[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the different pattern on LVDS output 14 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
5	0	R/W	0h	Must write 0
4-1	HPF_CORNER_CH13-16[3:0]	R/W	0h	When the DIG_HPF_EN_CH13-16 bit is set to 1, the digital HPF characteristic for the corresponding channels can be programmed by setting the value of $k$ with these bits. Characteristics of a digital high-pass transfer function applied to the output data for a given value of $k$ is defined by: $Y(n) = \frac{2^k}{2^k + 1} [x(n) - x(n - 1) + y(n - 1)]$ Note that the value of $k$ can be from 2 to 10 (0010b to 1010b); see the <a href="#">Digital HPF</a> section for further details.
0	DIG_HPF_EN_CH13-16	R/W	0h	0 = Digital HPF disabled for channels 13 to 16 (default) <sup>(1)</sup> 1 = Enables digital HPF for channels 13 to 16

(1) Should be set same as DIG\_HPF\_EN\_CH9-12

**13.1.2.1.51 Register 59 (address = 3Bh)**
**Figure 166. Register 59**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
PAT_LVDS15[2:0]			PAT_LVDS16[2:0]			0	0
R/W-0h			R/W-0h			R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; -n = value after reset

**Table 79. Register 59 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	0	R/W	0h	Must write 0
7-5	PAT_LVDS15[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, the different pattern on LVDS output 15 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
4-2	PAT_LVDS16[2:0]	R/W	0h	When the PAT_SELECT_IND bit is set to 1, then the different pattern on LVDS output 16 can be programmed with these bits; see <a href="#">Table 45</a> for bit descriptions.
1-0	0	R/W	0h	Must write 0

13.1.2.1.52 Register 60 (address = 3Ch)

Figure 167. Register 60

15		14		13		12		11		10		9		8	
PDN_DIG_CH16	PDN_DIG_CH15	PDN_DIG_CH14	PDN_DIG_CH13	PDN_DIG_CH12	PDN_DIG_CH11	PDN_DIG_CH10	PDN_DIG_CH9	PDN_DIG_CH8	PDN_DIG_CH7	PDN_DIG_CH6	PDN_DIG_CH5	PDN_DIG_CH4	PDN_DIG_CH3	PDN_DIG_CH2	PDN_DIG_CH1
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
7		6		5		4		3		2		1		0	
PDN_ANA_CH16	PDN_ANA_CH15	PDN_ANA_CH14	PDN_ANA_CH13	PDN_ANA_CH12	PDN_ANA_CH11	PDN_ANA_CH10	PDN_ANA_CH9	PDN_ANA_CH8	PDN_ANA_CH7	PDN_ANA_CH6	PDN_ANA_CH5	PDN_ANA_CH4	PDN_ANA_CH3	PDN_ANA_CH2	PDN_ANA_CH1
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; -n = value after reset

Table 80. Register 60 Field Descriptions

Bit	Field	Type	Reset	Description
15	PDN_DIG_CH16	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel 16
14	PDN_DIG_CH15	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel 15
13	PDN_DIG_CH14	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel 14
12	PDN_DIG_CH13	R/W	0h	0 = Normal operation (default) 1 = Powers down the digital block for channel 13
11	PDN_LVDS16	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 16
10	PDN_LVDS15	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 15
9	PDN_LVDS14	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 14
8	PDN_LVDS13	R/W	0h	0 = Normal operation (default) 1 = Powers down LVDS output line 13
7	PDN_ANA_CH16	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 16
6	PDN_ANA_CH15	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 15
5	PDN_ANA_CH14	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 14
4	PDN_ANA_CH13	R/W	0h	0 = Normal operation (default) 1 = Powers down the analog block for channel 13
3	INVERT_CH16	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 16 <sup>(1)</sup>
2	INVERT_CH15	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 15 <sup>(1)</sup>
1	INVERT_CH14	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 14 <sup>(1)</sup>
0	INVERT_CH13	R/W	0h	0 = Normal operation (default) 1 = Inverts digital output data sent on LVDS output line 13 <sup>(1)</sup>

(1) Has no effect on test patterns.

**13.1.2.1.53 Register 65 (address = 41h)**
**Figure 168. Register 65**

15	14	13	12	11	10	9	8
PLL RST1	0	0	0	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
0	0	0	0	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; -n = value after reset

**Table 81. Register 65 Field Descriptions**

Bit	Field	Type	Reset	Description
15	PLL RST1	R/W	0h	Part of initialization sequence. To initialize PLL1, first set PLL RST1 to '1' and again set PLL RST1 to '0'
14-0	0	R/W	0h	Must write 0

**13.1.2.1.54 Register 66 (address = 42h)**
**Figure 169. Register 66**

15	14	13	12	11	10	9	8
PLL RST2	0	0	0	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
0	0	0	0	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; -n = value after reset

**Table 82. Register 66 Field Descriptions**

Bit	Field	Type	Reset	Description
15	PLL RST2	R/W	0h	Part of initialization sequence. To initialize PLL2, first set PLL RST2 to '1' and again set PLL RST2 to '0'
14-0	0	R/W	0h	Must write 0

**13.1.2.1.55 Register 67 (address = 43h)**
**Figure 170. Register 67**

15		14		13		12		11		10		9		8	
0		0		0		0		0		0		0		0	
R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h	
7		6		5		4		3		2		1		0	
0		0		0		LVDS_DCLK_DELAY_PROG[3:0]						0			
R/W-0h		R/W-0h		R/W-0h		R/W-0h						R/W-0h			

LEGEND: R/W = Read/Write; -n = value after reset

**Table 83. Register 67 Field Descriptions**

Bit	Field	Type	Reset	Description
15-5	0	R/W	0h	Must write 0
4-1	LVDS_DCLK_DELAY_PROG[3:0]	R/W	0h	The LVDS DCLK output delay is programmable with 110-ps steps. Delay values are in twos complement format. Increasing the positive delay increases setup time and reduces hold time, and vice-versa for the negative delay. 0000 = No delay 0001 = 110 ps 0010 = 220 ps ... 1110 = –220 ps 1111 = –110 ps ...
0	0	R/W	0h	Must write 0

### 13.1.3 VCA Register Map

This section discusses the VCA register map. A register map is available in [Table 84](#).

DTGC\_WR\_EN must be set to 0 before programming the VCA register map.

**Table 84. VCA Register Map**

REGISTER ADDRESS		REGISTER DATA <sup>(1)</sup>															
DECIMAL	HEX	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
192	C0	0	0	0	0	0	0	0	0	0	0	0	1X_CLK_BUF_MODE	16X_CLK_BUF_MODE	CW_CLK_MODE		CW_TGC_SEL
193	C1	CW_MIX_PH_CH4				CW_MIX_PH_CH3				CW_MIX_PH_CH2				CW_MIX_PH_CH1			
194	C2	CW_MIX_PH_CH8				CW_MIX_PH_CH7				CW_MIX_PH_CH6				CW_MIX_PH_CH5			
195	C3	CW_MIX_PH_CH12				CW_MIX_PH_CH11				CW_MIX_PH_CH10				CW_MIX_PH_CH9			
196	C4	CW_MIX_PH_CH16				CW_MIX_PH_CH15				CW_MIX_PH_CH14				CW_MIX_PH_CH13			
197	C5	PDCH16	PDCH15	PDCH14	PDCH13	PDCH12	PDCH11	PDCH10	PDCH9	PDCH8	PDCH7	PDCH6	PDCH5	PDCH4	PDCH3	PDCH2	PDCH1
198	C6	0	0	0	0	0	0	0	0	0	0	0	0	PDWN_FILTER	PDWN_LNA	GBL_PDWN	FAST_PDWN
199	C7	0	0	0	0	LNA_HPF_PROG		LNA_HPF_DIS	LPF_PROG			0	0	0	0	0	0
200	C8	0	0	0	LOW_POW	0	0	0	0	0	0	0	0	0	0	0	0
206	CE	0	MEDIUM_POW	0	0	0	0	0	0	0	0	0	0	0	0	0	0
230	E6	0	0	0	0	0	0	0	0	0	0	0	TR_EXT_DIS	TR_DIS4	TR_DIS3	TR_DIS2	TR_DIS1

(1) The default value of all registers is 0.

**13.1.3.1 Description of VCA Registers**
**13.1.3.1.1 Register 192 (address = C0h)**
**Figure 171. Register 192**

15		14		13		12		11		10		9		8	
0		0		0		0		0		0		0		0	
R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h	
7		6		5		4		3		2		1		0	
0		0		0		1X_CLK_BUF_MODE		16X_CLK_BUF_MODE		CW_CLK_MODE				CW_TGC_SEL	
R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h				R/W-0h	

LEGEND: R/W = Read/Write; -n = value after reset

**Table 85. Register 192 Field Descriptions**

Bit	Field	Type	Reset	Description
15-5	0	R/W	0h	Must write 0
4	1X_CLK_BUF_MODE	R/W	0h	0 = Accepts CMOS clocks 1 = Accepts differential clocks
3	16X_CLK_BUF_MODE	R/W	0h	0 = Accepts differential clocks 1 = Accepts CMOS clocks
2-1	CW_CLK_MODE	R/W	0h	Programs CW path clock mode 00 = 16X mode 01 = 8X mode 10 = 4X mode 11 = 1X mode
0	CW_TGC_SEL	R/W	0h	0 = TGC mode 1 = CW mode Note: In CW mode, the LNA gain changes to a fixed value of 18 dB and the input attenuator block and low-pass filter are disabled. Thus, TGC and CW mode cannot be used at the same time.



**13.1.3.1.2 Register 193 (address = C1h)**
**Figure 172. Register 193**

15	14	13	12	11	10	9	8
CW_MIX_PH_CH4				CW_MIX_PH_CH3			
R/W-0h				R/W-0h			
7	6	5	4	3	2	1	0
CW_MIX_PH_CH2				CW_MIX_PH_CH1			
R/W-0h				R/W-0h			

LEGEND: R/W = Read/Write; -n = value after reset

**Table 86. Register 193 Field Descriptions**

Bit	Field	Type	Reset	Description
15-12	CW_MIX_PH_CH4	R/W	0h	These bits control the CW mixer phase for channel 4. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.
11-8	CW_MIX_PH_CH3	R/W	0h	These bits control the CW mixer phase for channel 3. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.
7-4	CW_MIX_PH_CH2	R/W	0h	These bits control the CW mixer phase for channel 2. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.
3-0	CW_MIX_PH_CH1	R/W	0h	These bits control the CW mixer phase for channel 1. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.

**13.1.3.1.3 Register 194 (address = C2h)**
**Figure 173. Register 194**

15	14	13	12	11	10	9	8
CW_MIX_PH_CH8				CW_MIX_PH_CH7			
R/W-0h				R/W-0h			
7	6	5	4	3	2	1	0
CW_MIX_PH_CH6				CW_MIX_PH_CH5			
R/W-0h				R/W-0h			

LEGEND: R/W = Read/Write; -n = value after reset

**Table 87. Register 194 Field Descriptions**

Bit	Field	Type	Reset	Description
15-12	CW_MIX_PH_CH8	R/W	0h	These bits control the CW mixer phase for channel 8. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.
11-8	CW_MIX_PH_CH7	R/W	0h	These bits control the CW mixer phase for channel 7. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.
7-4	CW_MIX_PH_CH6	R/W	0h	These bits control the CW mixer phase for channel 6. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.
3-0	CW_MIX_PH_CH5	R/W	0h	These bits control the CW mixer phase for channel 5. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.

**13.1.3.1.4 Register 195 (address = C3h)**
**Figure 174. Register 195**

15	14	13	12	11	10	9	8
CW_MIX_PH_CH12				CW_MIX_PH_CH11			
R/W-0h				R/W-0h			
7	6	5	4	3	2	1	0
CW_MIX_PH_CH10				CW_MIX_PH_CH9			
R/W-0h				R/W-0h			

LEGEND: R/W = Read/Write; -n = value after reset

**Table 88. Register 195 Field Descriptions**

Bit	Field	Type	Reset	Description
15-12	CW_MIX_PH_CH12	R/W	0h	These bits control the CW mixer phase for channel 12. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.
11-8	CW_MIX_PH_CH11	R/W	0h	These bits control the CW mixer phase for channel 11. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.
7-4	CW_MIX_PH_CH10	R/W	0h	These bits control the CW mixer phase for channel 10. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.
3-0	CW_MIX_PH_CH9	R/W	0h	These bits control the CW mixer phase for channel 9. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.

**13.1.3.1.5 Register 196 (address = C4h)**
**Figure 175. Register 196**

15	14	13	12	11	10	9	8
CW_MIX_PH_CH16				CW_MIX_PH_CH15			
R/W-0h				R/W-0h			
7	6	5	4	3	2	1	0
CW_MIX_PH_CH14				CW_MIX_PH_CH13			
R/W-0h				R/W-0h			

LEGEND: R/W = Read/Write; -n = value after reset

**Table 89. Register 196 Field Descriptions**

Bit	Field	Type	Reset	Description
15-12	CW_MIX_PH_CH16	R/W	0h	These bits control the CW mixer phase for channel 16. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.
11-8	CW_MIX_PH_CH15	R/W	0h	These bits control the CW mixer phase for channel 15. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.
7-4	CW_MIX_PH_CH14	R/W	0h	These bits control the CW mixer phase for channel 14. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.
3-0	CW_MIX_PH_CH13	R/W	0h	These bits control the CW mixer phase for channel 13. Writing <i>N</i> to these bits sets the corresponding channel phase to $N \times 22.5^\circ$ ( $N = 0$ to 15); see <a href="#">Table 90</a> for further details.

**Table 90. CW Mixer Phase Delay vs Register Settings**

BIT SETTINGS	CW_MIX_PH_CHX, CW_MIX_PH_CHY PHASE SHIFT
0000	0
0001	22.5°
0010	45°
0011	67.5°
0100	90°
0101	112.5°
0110	135°
0111	157.5°
1000	180°
1001	202.5°
1010	225°
1011	247.5°
1100	270°
1101	292.5°
1110	315°
1111	337.5°

**13.1.3.1.6 Register 197 (address = C5h)**
**Figure 176. Register 197**

15	14	13	12	11	10	9	8
PDCH16	PDCH15	PDCH14	PDCH13	PDCH12	PDCH11	PDCH10	PDCH9
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
PDCH8	PDCH7	PDCH6	PDCH5	PDCH4	PDCH3	PDCH2	PDCH1
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; -n = value after reset

**Table 91. Register 197 Field Descriptions**

Bit	Field	Type	Reset	Description
15	PDCH16	R/W	0h	0 = Default 1 = Channel 16 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.
14	PDCH 15	R/W	0h	0 = Default 1 = Channel 15 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.
13	PDCH 14	R/W	0h	0 = Default 1 = Channel 14 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.
12	PDCH 13	R/W	0h	0 = Default 1 = Channel 13 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.
11	PDCH 12	R/W	0h	0 = Default 1 = Channel 12 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.
10	PDCH 11	R/W	0h	0 = Default 1 = Channel 11 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.

**Table 91. Register 197 Field Descriptions (continued)**

Bit	Field	Type	Reset	Description
9	PDCH 10	R/W	0h	0 = Default 1 = Channel 10 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.
8	PDCH 9	R/W	0h	0 = Default 1 = Channel 9 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.
7	PDCH 8	R/W	0h	0 = Default 1 = Channel 8 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.
6	PDCH 7	R/W	0h	0 = Default 1 = Channel 7 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.
5	PDCH 6	R/W	0h	0 = Default 1 = Channel 6 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.
4	PDCH 5	R/W	0h	0 = Default 1 = Channel 5 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.
3	PDCH 4	R/W	0h	0 = Default 1 = Channel 4 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.
2	PDCH 3	R/W	0h	0 = Default 1 = Channel 3 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.
1	PDCH 2	R/W	0h	0 = Default 1 = Channel 2 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.
0	PDCH 1	R/W	0h	0 = Default 1 = Channel 1 is powered down. This bit powers down the channel of the VCA die only (LNA, LPF, CW mixer). This bit does not affect the ADC channel.

**13.1.3.1.7 Register 198 (address = C6h)**
**Figure 177. Register 198**

15		14		13		12		11		10		9		8	
0		0		0		0		0		0		0		0	
R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h	
7		6		5		4		3		2		1		0	
0		0		0		0		PDWN_FILTER		PDWN_LNA		GBL_PDWN		FAST_PDWN	
R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h	

LEGEND: R/W = Read/Write; -n = value after reset

**Table 92. Register 198 Field Descriptions**

Bit	Field	Type	Reset	Description
15-4	0	R/W	0h	Must write 0
3	PDWN_FILTER	R/W	0h	0 = Default 1 = The LPF in the VCA die is powered down
2	PDWN_LNA	R/W	0h	0 = Default 1 = The LNA in the VCA is powered down
1	GBL_PDWN	R/W	0h	0 = Normal operation 1 = The LNA, LPF, CW mixer, and TGC control engine are completely powered down (slow wake response) for the VCA die. Note that enabling this bit does not power-down the ADC. This bit only powers down the VCA die.
0	FAST_PDWN	R/W	0h	0 = Normal operation 1 = The LNA, LPF, and CW mixer are partially powered down (fast wake response) for the VCA die. Note that enabling this bit does not power-down the ADC. This bit only powers down the VCA die.

13.1.3.1.8 Register 199 (address = C7h)

Figure 178. Register 199

15	14	13	12	11	10	9	8
0	0	0	0	LNA_HP_F_PROG		LNA_HP_F_DIS	LPF_PROG
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h		R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
LPF_PROG	0	0	0	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; -n = value after reset

Table 93. Register 199 Field Descriptions

Bit	Field	Type	Reset	Description
15-12	0	R/W	0h	Must write 0
11-10	LNA_HP_F_PROG	R/W	0h	These bits control the LNA HPF cutoff frequency. 00 = 75 kHz 01 = 150 kHz 10 = 300 kHz 11 = 600 kHz
9	LNA_HP_F_DIS	R/W	0h	0 = LNA HPF enabled 1 = LNA HPF disabled
8-7	LPF_PROG	R/W	0h	These bits program the cutoff frequency of the antialiasing LPF. 00 = 15 MHz in low-noise and medium-power mode, 7.5 MHz in low-power mode 01 = 10 MHz in low-noise and medium-power mode, 5 MHz in low-power mode 10 = 25 MHz in low-noise and medium-power mode, 12.5 MHz in low-power mode 11 = 20 MHz in low-noise and medium-power mode, 10 MHz in low-power mode
6-0	0	R/W	0h	Must write 0

13.1.3.1.9 Register 200 (address = C8h)

Figure 179. Register 200

15	14	13	12	11	10	9	8
0	0	0	LOW_POW	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
0	0	0	0	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; -n = value after reset

Table 94. Register 200 Field Descriptions

Bit	Field	Type	Reset	Description
15-13	0	R/W	0h	Must write 0
12	LOW_POW	R/W	0h	0 = Default 1 = In TGC mode the VCA die is set to low-power mode. No effect in CW mode.
11-0	0	R/W	0h	Must write 0

**13.1.3.1.10 Register 206 (address = CEh)**
**Figure 180. Register 206**

15	14	13	12	11	10	9	8
0	MEDIUM_POW	0	0	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
0	0	0	0	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; -n = value after reset

**Table 95. Register 206 Field Descriptions**

Bit	Field	Type	Reset	Description
15	0	R/W	0h	Must write 0
14	MEDIUM_POW	R/W	0h	0 = Default 1 = In TGC mode, the VCA die is set to medium-power mode. The LOW_POW bit must be set to 0 to enable this mode. This bit has no effect in CW mode.
13-0	0	R/W	0h	Must write 0

**13.1.3.1.11 Register 230 (address = E6h)**
**Figure 181. Register 230**

15	14	13	12	11	10	9	8
0	0	0	0	0	0	0	0
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
0	0	0	TR_EXT_DIS	TR_DIS4	TR_DIS3	TR_DIS2	TR_DIS1
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; -n = value after reset

**Table 96. Register 230 Field Descriptions**

Bit	Field	Type	Reset	Description
15-5	0	R/W	0h	Must write 0
4	TR_EXT_DIS <sup>(1)</sup>	R/W	0h	0 = The TR_EN<x> pins are used to disconnect the LNA HPF from the INP pins 1 = The TR_DIS[4:1] register bits are used to disconnect the LNA HPF from the INP pin
3	TR_DIS4 <sup>(1)</sup>	R/W	0h	When the TR_EXT_DIS bit is set to 1: 0 = Disconnects the LNA HPF from the input of channels 13, 14, 15, and 16 1 = Enables the LNA HPF at the input of channels 13, 14, 15, and 16
2	TR_DIS3 <sup>(1)</sup>	R/W	0h	When the TR_EXT_DIS bit is set to 1: 0 = Disconnects the LNA HPF from the input of channels 9, 10, 11, and 12 1 = Enables the LNA HPF at the input of channels 9, 11, 11, and 12
1	TR_DIS2 <sup>(1)</sup>	R/W	0h	When the TR_EXT_DIS bit set to 1: 0 = Disconnects the LNA HPF from the input of channels 5, 6, 7, and 8 1 = Enables the LNA HPF at the input of channels 5, 6, 7, and 8
0	TR_DIS1 <sup>(1)</sup>	R/W	0h	When the TR_EXT_DIS bit is set to 1: 0 = Disconnects the LNA HPF from the input of channels 1, 2, 3, and 4 1 = Enables the LNA HPF at the input of channels 1, 2, 3, and 4

(1) Note that when this bit is enabled, the LNA HPF remains powered up and is disconnected only from the input. This feature can be used for better overload recovery by disconnecting the LNA HPF during AFE overload conditions.

### 13.1.4 DTGC Register Map

This section discusses the DTGC register map. A register map is available in [Table 24](#).

DTGC\_WR\_EN must be set to 1 before programming other bits of the global register map.

**Table 97. DTGC Register Map**

REGISTER ADDRESS		REGISTER DATA																	
DECIMAL	HEX	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
1	1	MEM_WORD_0																	
2-160	2-A0	MEM_WORD_1 to MEM_WORD_159																	
161	A1	START_GAIN_0								STOP_GAIN_0									
162	A2	POS_STEP_0								NEG_STEP_0									
163	A3	START_INDEX_0								STOP_INDEX_0									
164	A4	START_GAIN_TIME_0																	
165	A5	HOLD_GAIN_TIME_0																	
166	A6	START_GAIN_1								STOP_GAIN_1									
167	A7	POS_STEP_1								NEG_STEP_1									
168	A8	START_INDEX_1								STOP_INDEX_1									
169	A9	START_GAIN_TIME_1																	
170	AA	HOLD_GAIN_TIME_1																	
171	AB	START_GAIN_2								STOP_GAIN_2									
172	AC	POS_STEP_2								NEG_STEP_2									
173	AD	START_INDEX_2								STOP_INDEX_2									
174	AE	START_GAIN_TIME_2																	
175	AF	HOLD_GAIN_TIME_2																	
176	B0	START_GAIN_3								STOP_GAIN_3									
177	B1	POS_STEP_3								NEG_STEP_3									
178	B2	START_INDEX_3								STOP_INDEX_3									
179	B3	START_GAIN_TIME_3																	
180	B4	HOLD_GAIN_TIME_3																	
181	B5	SLOPE_FAC[0]	ENABLE_INT_START	MEM_BANK_SEL	0	MANUAL_START	0	MANUAL_GAIN_DTGC											
182	B6	MODE_SEL		PROFILE_REG_SEL	PROFILE_EXT_DIS	INP_RES_SEL				FLIP_ATTEN	DIS_ATTEN	SLOPE_FAC[3:1]			0	0			
183	B7	NEXT_CYCLE_WAIT_TIME																	
185	B9	FIX_ATTEN_EN_0	ATTENUATION_0								FIX_ATTEN_EN_1	ATTENUATION_1							
186	BA	FIX_ATTEN_EN_2	ATTENUATION_2								FIX_ATTEN_EN_3	ATTENUATION_3							



### 13.1.4.1 Description of DTGC Register

#### 13.1.4.1.1 DTGC Registers

DTGC\_WR\_EN must be set to 1 to write these registers.

##### 13.1.4.1.1.1 Register 1 (address = 1h)

**Figure 182. Register 1**

15	14	13	12	11	10	9	8
MEM_WORD_0							
R/W-Undefined							
7	6	5	4	3	2	1	0
MEM_WORD_0							
R/W-Undefined							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 98. Register 1 Field Descriptions**

Bit	Field	Type	Reset	Description
15-0	MEM_WORD_0	R/W	Undefined	The memory word register 0 stores the gain step information that is used in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details. A reset operation does not reset this register. After power-up, this register must be explicitly written to its desired content.

##### 13.1.4.1.1.2 Registers 2-160 (address = 2h-A0h)

**Figure 183. Registers 2-160**

15	14	13	12	11	10	9	8
MEM_WORD_1 to MEM_WORD_159							
R/W-Undefined							
7	6	5	4	3	2	1	0
MEM_WORD_1 to MEM_WORD_159							
R/W-Undefined							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 99. Registers 2-160 Field Descriptions**

Bit	Field	Type	Reset	Description
15-0	MEM_WORD_1 to MEM_WORD_159	R/W	Undefined	The memory word registers from 1 to 159 store the gain step information that is used in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details. A reset operation does not reset this register. After power-up, this register must be explicitly written to its desired content.

**13.1.4.1.1.3 Register 161 (address = A1h)**
**Figure 184. Register 161**

15	14	13	12	11	10	9	8
START_GAIN_0							
R/W-0h							
7	6	5	4	3	2	1	0
STOP_GAIN_0							
R/W-9Fh							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 100. Register 161 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	START_GAIN_0	R/W	0h	These bits determine the start gain value for profile 0 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.
7-0	STOP_GAIN_0	R/W	9Fh	These bits determine the stop gain value for profile 0 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.

**13.1.4.1.1.4 Register 162 (address = A2h)**
**Figure 185. Register 162**

15	14	13	12	11	10	9	8
POS_STEP_0							
R/W-0h							
7	6	5	4	3	2	1	0
NEG_STEP_0							
R/W-FFh							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 101. Register 162 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	POS_STEP_0	R/W	0h	These bits determine the positive step value for profile 0 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.
7-0	NEG_STEP_0	R/W	FFh	These bits determine the negative step value for profile 0 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.

**13.1.4.1.1.5 Register 163 (address = A3h)**
**Figure 186. Register 163**

15	14	13	12	11	10	9	8
START_INDEX_0							
R/W-0h							
7	6	5	4	3	2	1	0
STOP_INDEX_0							
R/W-9Fh							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 102. Register 163 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	START_INDEX_0	R/W	0h	These bits determine the start index value for profile 0, which is used in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.
7-0	STOP_INDEX_0	R/W	9Fh	These bits determine the stop index value for profile 0, which is used internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.

**13.1.4.1.1.6 Register 164 (address = A4h)**
**Figure 187. Register 164**

15	14	13	12	11	10	9	8
START_GAIN_TIME_0							
R/W-0h							
7	6	5	4	3	2	1	0
START_GAIN_TIME_0							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 103. Register 164 Field Descriptions**

Bit	Field	Type	Reset	Description
15-0	START_GAIN_TIME_0	R/W	0h	These bits define the start gain time for profile 0 and are used in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.

**13.1.4.1.1.7 Register 165 (address = A5h)**
**Figure 188. Register 165**

15	14	13	12	11	10	9	8
HOLD_GAIN_TIME_0							
R/W-0h							
7	6	5	4	3	2	1	0
HOLD_GAIN_TIME_0							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 104. Register 165 Field Descriptions**

Bit	Field	Type	Reset	Description
15-0	HOLD_GAIN_TIME_0	R/W	0h	These bits define the hold gain time for profile 0 and are used in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.

**13.1.4.1.1.8 Register 166 (address = A6h)**
**Figure 189. Register 166**

15	14	13	12	11	10	9	8
START_GAIN_1							
R/W-0h							
7	6	5	4	3	2	1	0
STOP_GAIN_1							
R/W-9Fh							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 105. Register 166 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	START_GAIN_1	R/W	0h	These bits determine the start gain value for profile 1 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.
7-0	STOP_GAIN_1	R/W	9Fh	These bits determine the stop gain value for profile 1 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.

**13.1.4.1.1.9 Register 167 (address = A7h)**
**Figure 190. Register 167**

15	14	13	12	11	10	9	8
POS_STEP_1							
R/W-0h							
7	6	5	4	3	2	1	0
NEG_STEP_1							
R/W-FFh							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 106. Register 167 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	POS_STEP_1	R/W	0h	These bits determine the positive step value for profile 1 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.
7-0	NEG_STEP_1	R/W	FFh	These bits determine the negative step value for profile 1 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.

**13.1.4.1.1.10 Register 168 (address = A8h)**
**Figure 191. Register 168**

15	14	13	12	11	10	9	8
START_INDEX_1							
R/W-0h							
7	6	5	4	3	2	1	0
STOP_INDEX_1							
R/W-9Fh							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 107. Register 168 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	START_INDEX_1	R/W	0h	These bits determine the start index value for profile 1 that is used in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.
7-0	STOP_INDEX_1	R/W	9Fh	These bits determine the stop index value for profile 1 that is used internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.

**13.1.4.1.1.11 Register 169 (address = A9h)**
**Figure 192. Register 169**

15	14	13	12	11	10	9	8
START_GAIN_TIME_1							
R/W-0h							
7	6	5	4	3	2	1	0
START_GAIN_TIME_1							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 108. Register 169 Field Descriptions**

Bit	Field	Type	Reset	Description
15-0	START_GAIN_TIME_1	R/W	0h	These bits define the start gain time for profile 1 and are used in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.

**13.1.4.1.1.12 Register 170 (address = AAh)**
**Figure 193. Register 170**

15	14	13	12	11	10	9	8
HOLD_GAIN_TIME_1							
R/W-0h							
7	6	5	4	3	2	1	0
HOLD_GAIN_TIME_1							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 109. Register 170 Field Descriptions**

Bit	Field	Type	Reset	Description
15-0	HOLD_GAIN_TIME_1	R/W	0h	These bits define the hold gain time for profile 1 and are used in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.

**13.1.4.1.1.13 Register 171 (address = ABh)**
**Figure 194. Register 171**

15	14	13	12	11	10	9	8
START_GAIN_2							
R/W-0h							
7	6	5	4	3	2	1	0
STOP_GAIN_2							
R/W-9Fh							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 110. Register 171 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	START_GAIN_2	R/W	0h	These bits determine the start gain value for profile 2 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.
7-0	STOP_GAIN_2	R/W	9Fh	These bits determine the stop gain value for profile 2 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.

**13.1.4.1.1.14 Register 172 (address = ACh)**
**Figure 195. Register 172**

15	14	13	12	11	10	9	8
POS_STEP_2							
R/W-0h							
7	6	5	4	3	2	1	0
NEG_STEP_2							
R/W-FFh							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 111. Register 172 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	POS_STEP_2	R/W	0h	These bits determine the positive step value for profile 2 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.
7-0	NEG_STEP_2	R/W	FFh	These bits determine the negative step value for profile 2 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.

**13.1.4.1.1.15 Register 173 (address = ADh)**
**Figure 196. Register 173**

15	14	13	12	11	10	9	8
START_INDEX_2							
R/W-0h							
7	6	5	4	3	2	1	0
STOP_INDEX_2							
R/W-9Fh							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 112. Register 173 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	START_INDEX_2	R/W	0h	These bits determine the start index value for profile 2 that is used in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.
7-0	STOP_INDEX_2	R/W	9Fh	These bits determine the stop index value for profile 2 that is used internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.

**13.1.4.1.1.16 Register 174 (address = AEh)**
**Figure 197. Register 174**

15	14	13	12	11	10	9	8
START_GAIN_TIME_2							
R/W-0h							
7	6	5	4	3	2	1	0
START_GAIN_TIME_2							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 113. Register 174 Field Descriptions**

Bit	Field	Type	Reset	Description
15-0	START_GAIN_TIME_2	R/W	0h	These bits define start gain time for profile 2 and are used in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.

**13.1.4.1.1.17 Register 175 (address = AFh)**
**Figure 198. Register 175**

15	14	13	12	11	10	9	8
HOLD_GAIN_TIME_2							
R/W-0h							
7	6	5	4	3	2	1	0
HOLD_GAIN_TIME_2							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 114. Register 175 Field Descriptions**

Bit	Field	Type	Reset	Description
15-0	HOLD_GAIN_TIME_2	R/W	0h	These bits define hold gain time for profile 2 and are used in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.

**13.1.4.1.1.18 Register 176 (address = B0h)**
**Figure 199. Register 176**

15	14	13	12	11	10	9	8
START_GAIN_3							
R/W-0h							
7	6	5	4	3	2	1	0
STOP_GAIN_3							
R/W-9Fh							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 115. Register 176 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	START_GAIN_3	R/W	0h	These bits determine the start gain value for profile 3 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.
7-0	STOP_GAIN_3	R/W	9Fh	These bits determine the stop gain value for profile 3 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.



**13.1.4.1.1.19 Register 177 (address = B1h)**
**Figure 200. Register 177**

15	14	13	12	11	10	9	8
POS_STEP_3							
R/W-0h							
7	6	5	4	3	2	1	0
NEG_STEP_3							
R/W-FFh							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 116. Register 177 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	POS_STEP_3	R/W	0h	These bits determine the positive step value for profile 3 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.
7-0	NEG_STEP_3	R/W	FFh	These bits determine the negative step value for profile 3 that is used in different DTGC modes; see the <a href="#">Digital TGC Modes</a> section for more details.

**13.1.4.1.1.20 Register 178 (address = B2h)**
**Figure 201. Register 178**

15	14	13	12	11	10	9	8
START_INDEX_3							
R/W-0h							
7	6	5	4	3	2	1	0
NEG_STEP_0							
R/W-9Fh							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 117. Register 178 Field Descriptions**

Bit	Field	Type	Reset	Description
15-8	START_INDEX_3	R/W	0h	These bits determine the start index value for profile 3 that is used in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.
7-0	STOP_INDEX_3	R/W	9Fh	These bits determine the stop index value for profile 3 that is used internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.

**13.1.4.1.1.21 Register 179 (address = B3h)**
**Figure 202. Register 179**

15	14	13	12	11	10	9	8
START_GAIN_TIME_3							
R/W-0h							
7	6	5	4	3	2	1	0
START_GAIN_TIME_3							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 118. Register 179 Field Descriptions**

Bit	Field	Type	Reset	Description
15-0	START_GAIN_TIME_3	R/W	0h	These bits define the start gain time for profile 3 and are used in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.

**13.1.4.1.1.22 Register 180 (address = B4h)**
**Figure 203. Register 180**

15	14	13	12	11	10	9	8
HOLD_GAIN_TIME_3							
R/W-0h							
7	6	5	4	3	2	1	0
HOLD_GAIN_TIME_3							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 119. Register 180 Field Descriptions**

Bit	Field	Type	Reset	Description
15-0	HOLD_GAIN_TIME_3	R/W	0h	These bits define the hold gain time for profile 3 and are used in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.

**13.1.4.1.1.23 Register 181 (address = B5h)**
**Figure 204. Register 181**

15		14		13		12		11		10		9		8	
SLOPE_FAC[0]		ENABLE_INT_START		MEM_BANK_SEL		0		MANUAL_START		0		MANUAL_GAIN_DTGC			
R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h		R/W-0h	
7		6		5		4		3		2		1		0	
MANUAL_GAIN_DTGC															
R/W-0h															

LEGEND: R/W = Read/Write; -n = value after reset

**Table 20. Register 181 Field Descriptions**

Bit	Field	Type	Reset	Description
15	SLOPE_FAC[0]	R/W	0h	This bit is used to control the TGC gain curve slope in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.
14	ENABLE_INT_START	R/W	0h	0 = External TGC start signal 1 = Periodic TGC start signal is generated by the device itself; see the <a href="#">Digital TGC Test Modes</a> section for more details.
13-12	MEM_BANK_SEL	R/W	0h	These bits select the memory bank; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.
11, 9	0	R/W	0h	Must write 0
10	MANUAL_START	R/W	0h	0 = No operation 1 = The TGC start signal is generated internally for single-shot operation only; see the <a href="#">Digital TGC Test Modes</a> section for more details.
8-0	MANUAL_GAIN_DTGC	R/W	0h	The value of the gain code is determined with this register in programmable fixed-gain mode; see the <a href="#">Programmable Fixed Gain Mode</a> section for more details.

**13.1.4.1.1.24 Register 182 (address = B6h)**
**Figure 205. Register 182**

15		14		13		12		11		10		9		8	
MODE_SEL				PROFILE_REG_SEL				PROFILE_EXT_DIS				INP_RES_SEL			
R/W-0h				R/W-0h				R/W-0h				R/W-0h			
7		6		5		4		3		2		1		0	
INP_RES_SEL		FLIP_ATTEN		DIS_ATTEN				SLOPE_FAC[3:1]				0		0	
R/W-0h		R/W-0h		R/W-0h				R/W-0h				R/W-0h		R/W-0h	

LEGEND: R/W = Read/Write; -n = value after reset

**Table 21. Register 182 Field Descriptions**

Bit	Field	Type	Reset	Description
15-14	MODE_SEL	R/W	0h	These bits determine the DTGC mode. 00 = External non-uniform mode 01 = Up, down ramp mode 10 = Programmable fixed-gain mode 11 = Internal non-uniform mode
13-12	PROFILE_REG_SEL	R/W	0h	These bits determine which profile register to use when the PROFILE_EXT_DIS bit is 1. 00 = Profile 0 01 = Profile 1 10 = Profile 2 01 = Profile 3

**Table 121. Register 182 Field Descriptions (continued)**

Bit	Field	Type	Reset	Description
11	PROFILE_EXT_DIS	R/W	0h	0 = Device pins TGC_PROF<2> and TGC_PROF<1> determine which profile to use 1 = The PROFILE_REG_SEL register bits determine which profile to use
10-7	INP_RES_SEL	R/W	0h	Depending upon source resistance, proper input attenuation resistance must be selected to obtain 8-dB attenuation. <a href="#">Table 122</a> lists the values to be written for different source resistances.
6	FLIP_ATTEN	R/W	0h	0 = In the TGC gain curve, the attenuation of the attenuator block varies first, followed by the LNA gain variation 1 = In the TGC gain curve, the LNA gain varies first, followed by the attenuation of the attenuator block
5	DIS_ATTEN	R/W	0h	0 = Attenuator is enabled 1 = Attenuator is disabled
4-2	SLOPE_FAC[3:1]	R/W	0h	These bits are used to control the TGC gain curve slope in internal non-uniform mode; see the <a href="#">Internal Non-Uniform Mode</a> section for more details.
1-0	0	R/W	0h	Must write 0

**Table 122. INP\_RES\_SEL Values**

BIT SETTING	SOURCE RESISTANCE
0000	50 Ω
0001	115 Ω
0010	70 Ω
0011	270 Ω
0100	60 Ω
0101	160 Ω
0110	90 Ω
0111	800 Ω
1000	60 Ω
1001	130 Ω
1010	80 Ω
1011	400 Ω
1100	65 Ω
1101	200 Ω
1110	100 Ω
1111	Open

**13.1.4.1.1.25 Register 183 (address = B7h)**
**Figure 206. Register 183**

15	14	13	12	11	10	9	8
NEXT_CYCLE_WAIT_TIME							
R/W-0h							
7	6	5	4	3	2	1	0
NEXT_CYCLE_WAIT_TIME							
R/W-0h							

LEGEND: R/W = Read/Write; -n = value after reset

**Table 123. Register 183 Field Descriptions**

Bit	Field	Type	Reset	Description
15-0	NEXT_CYCLE_WAIT_TIME	R/W	0h	When ENABLE_INT_START is set to 1, the periodicity of the internal start signal is controlled with this register; see the <a href="#">Digital TGC Test Modes</a> section for more details.

**13.1.4.1.1.26 Register 185 (address = B9h)**
**Figure 207. Register 185**

15	14	13	12	11	10	9	8
FIX_ATTEN_EN_0		ATTENUATION_0					
R/W-0h		R/W-0h					
7	6	5	4	3	2	1	0
FIX_ATTEN_EN_1		ATTENUATION_1					
R/W-0h		R/W-0h					

LEGEND: R/W = Read/Write; -n = value after reset

**Table 124. Register 185 Field Descriptions**

Bit	Field	Type	Reset	Description
15	FIX_ATTEN_EN_0	R/W	0h	0 = Default 1 = Enable fixed attenuation mode for profile 0
14-8	ATTENUATION_0	R/W	0h	When the FIX_ATTEN_EN_0 bit is set to 1, the attenuation level of the attenuator block is set by the ATTENUATION_0 bits for profile 0. A value of $N$ written in the ATTENUATION_0 register sets the attenuation level at $-8 + N \times 0.125$ dB.
7	FIX_ATTEN_EN_1	R/W	0h	0 = Default 1 = Enable fixed attenuation mode for profile 1
6-0	ATTENUATION_1	R/W	0h	When the FIX_ATTEN_EN_1 bit is set to 1, the attenuation level of the attenuator block is set by the ATTENUATION_1 bits for profile 1. A value of $N$ written in the ATTENUATION_1 register sets the attenuation level at $-8 + N \times 0.125$ dB.

**13.1.4.1.1.27 Register 186 (address = BAh)**
**Figure 208. Register 186**

15	14	13	12	11	10	9	8
FIX_ATTEN_EN_2		ATTENUATION_2					
R/W-0h		R/W-0h					
7	6	5	4	3	2	1	0
FIX_ATTEN_EN_3		ATTENUATION_3					
R/W-0h		R/W-0h					

LEGEND: R/W = Read/Write; -n = value after reset

**Table 125. Register 186 Field Descriptions**

Bit	Field	Type	Reset	Description
15	FIX_ATTEN_EN_2	R/W	0h	0 = Default 1 = Enable fixed attenuation mode for profile 2
14-8	ATTENUATION_2	R/W	0h	When the FIX_ATTEN_EN_2 bit is set to 1, the attenuation level of the attenuator block is set by the ATTENUATION_2 bits for profile 2. A value of $N$ written in the ATTENUATION_2 register sets the attenuation level at $-8 + N \times 0.125$ dB.
7	FIX_ATTEN_EN_3	R/W	0h	0 = Default 1 = Enable fixed attenuation mode for profile 3
6-0	ATTENUATION_3	R/W	0h	When the FIX_ATTEN_EN_3 bit is set to 1, the attenuation level of the attenuator block is set by the ATTENUATION_3 bits for profile 3. A value of $N$ written in the ATTENUATION_3 register sets the attenuation level at $-8 + N \times 0.125$ dB.

## 14 器件和文档支持

### 14.1 文档支持

#### 14.1.1 相关文档

《具有 140mW/通道功耗、0.75nV/√Hz 噪声、14 位 65MSPS 或 12 位 80MSPS ADC 以及 CW 无源混频器的 AFE5818 16 通道超声波模拟前端》

《ADS8413 16 位、2MSPS、LVDS 串行接口 SAR 模数转换器》

《具有并行接口、基准的 ADS8472 16 位、1MSPS、伪双极、全差分输入、低功耗采样模数转换器》

《CDCE72010 10 路输出高性能时钟同步器、抖动消除器和时钟分配器》

《CDCM7005 3.3V 高性能时钟同步器和抖动消除器》

《ISO724x 高速四通道数字隔离器》

《具有双环路 PLL 的 LMK0480x 低噪声时钟抖动清除器》

《OPA1632 高性能、全差分音频运算放大器》

《OPA2x11 1.1-nV/√Hz 噪声、低功耗、精密运算放大器》

《SN74AUP1T04 低功耗、1.8/2.5/3.3V 输入、3.3V CMOS 输出单反相器门》

《THS413x 高速、低噪声、全差分 I/O 放大器》

《MicroStar BGA 封装参考指南》

### 14.2 社区资源

下列链接提供到 TI 社区资源的连接。链接的内容由各个分销商“按照原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《使用条款》。

**TI E2E™ 在线社区** TI 的工程师对工程师 (E2E) 社区。此社区的创建目的在于促进工程师之间的协作。在 e2e.ti.com 中，您可以咨询问题、分享知识、拓展思路并与同行工程师一道帮助解决问题。

**设计支持** TI 参考设计支持 可帮助您快速查找有帮助的 E2E 论坛、设计支持工具以及技术支持的联系信息。

### 14.3 商标

E2E is a trademark of Texas Instruments.  
All other trademarks are the property of their respective owners.

### 14.4 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

### 14.5 Glossary

**SLYZ022** — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

## 15 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。这些数据如有变更，恕不另行通知和修订此文档。如欲获取此产品说明书的浏览器版本，请参阅左侧的导航。

**PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
AFE5816ZAV	ACTIVE	NFBGA	ZAV	289	126	RoHS & Green	SNAGCU	Level-3-260C-168 HR	-40 to 85	AFE5816	Samples

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.


(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

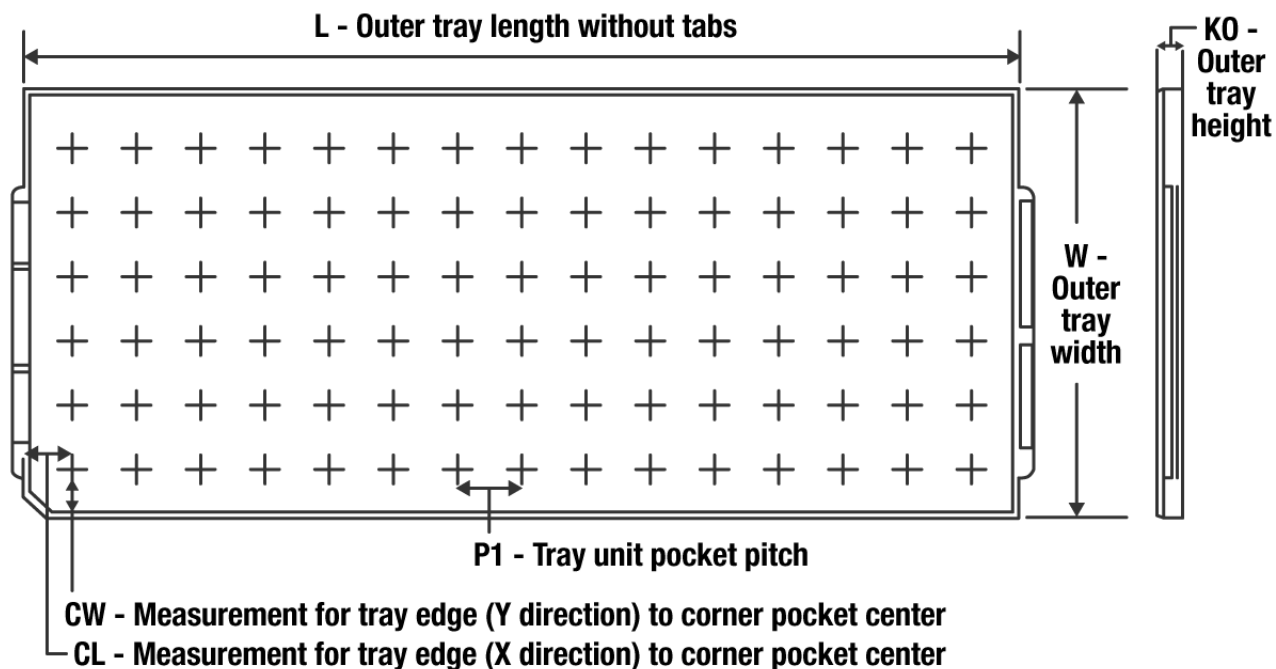

**TRAY**


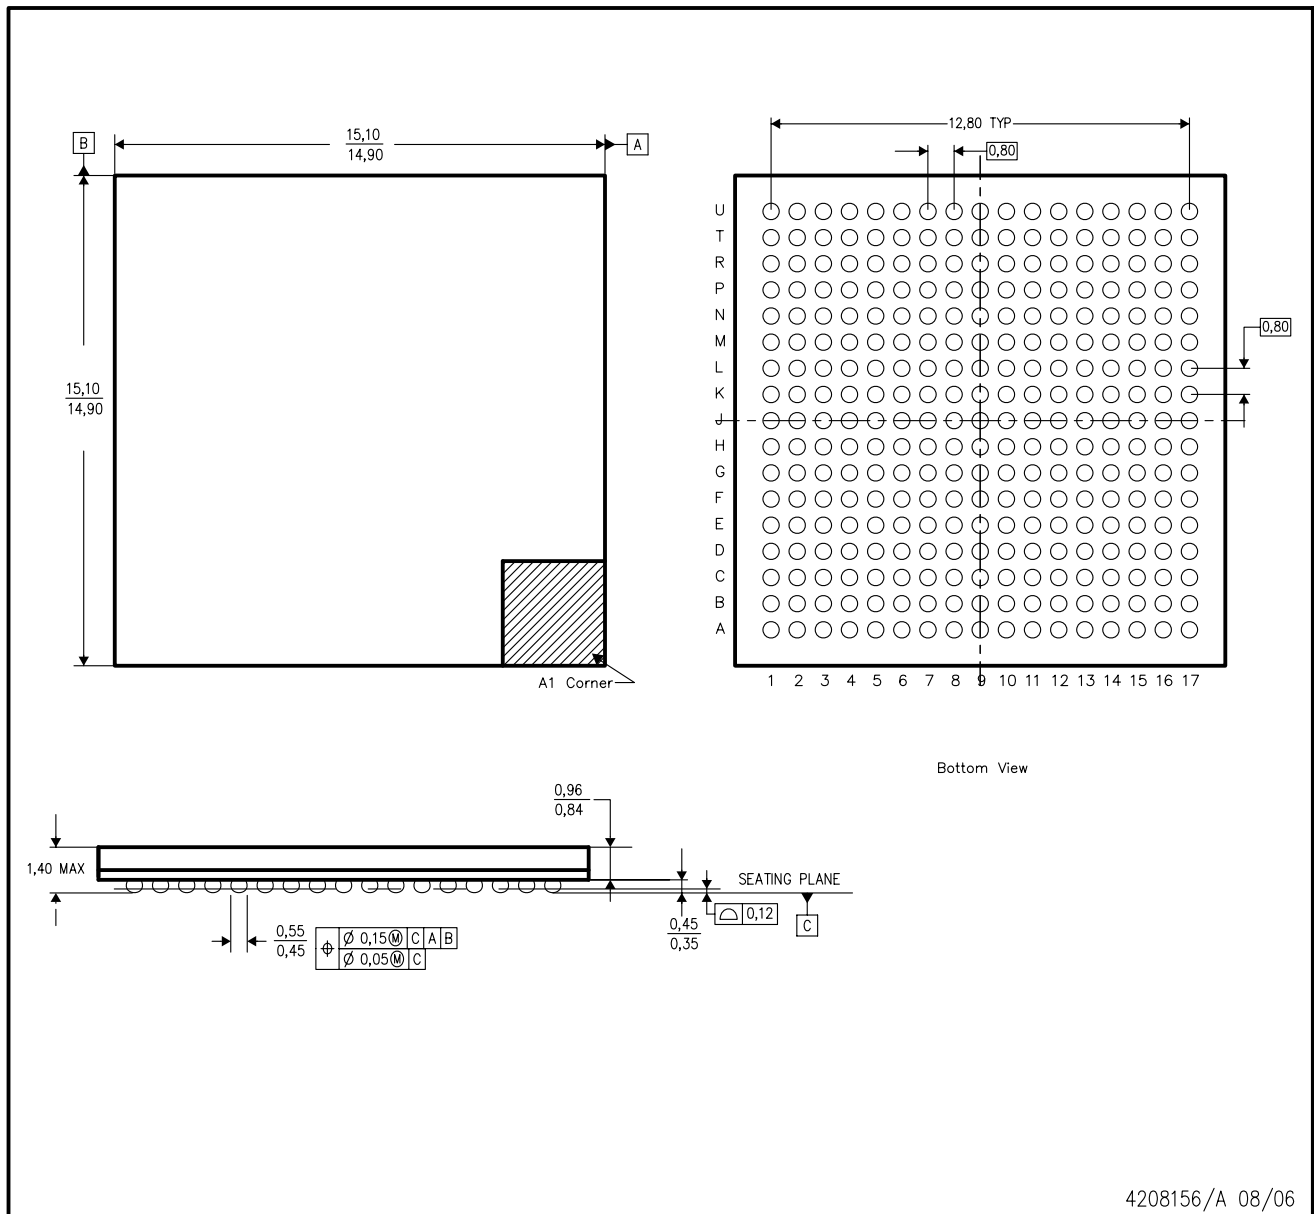
Chamfer on Tray corner indicates Pin 1 orientation of packed units.

\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	Unit array matrix	Max temperature (°C)	L (mm)	W (mm)	K0 (µm)	P1 (mm)	CL (mm)	CW (mm)
AFE5816ZAV	ZAV	NFBGA	289	126	7 X 18	150	315	135.9	7620	17.2	11.3	16.35

ZAV (S-PBGA-N289)

PLASTIC BALL GRID ARRAY



- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. This is a lead-free solder ball design.

## 重要声明和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265

Copyright © 2022，德州仪器 (TI) 公司