


SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

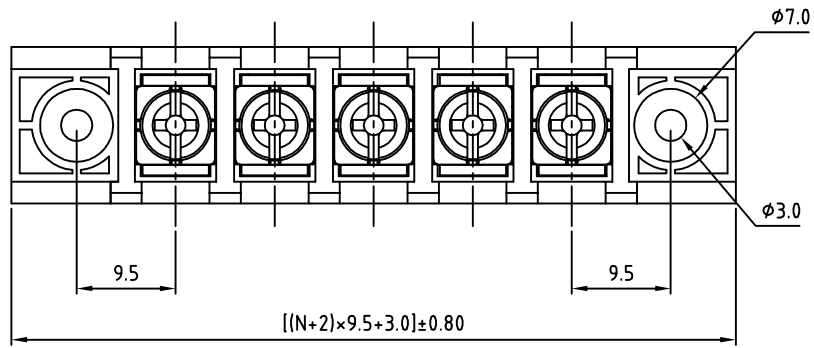

SPECIFICATIONS

VOLTAGE & CURRENT: 300 V, 20 A

WITHSTANDING VOLTAGE: AC 2000 V/Min

INSULATION RESISTANCE: 1000 M Ω OR MORE AT DC 500 V

TEMPERATURE RANGE: -40 °C ~+105 °C

SCREW TORQUE VALUE: 12 Lb-In.

WIRE RANGE: 22 - 12AWG



1) MOLDED PARTS: THERMOPLASTIC, UL 94 V-0 BLACK

2) TERMINAL: BRASS, 0.8t, Tin PLATED

3) TERMINAL SCREWS: STEEL, Ni PLATED, M3.5

APPROVAL:

RoHS Compliant

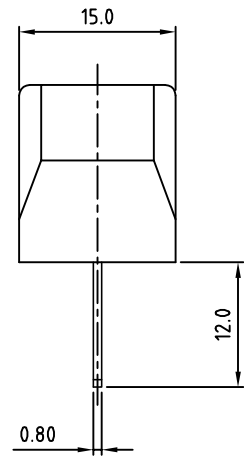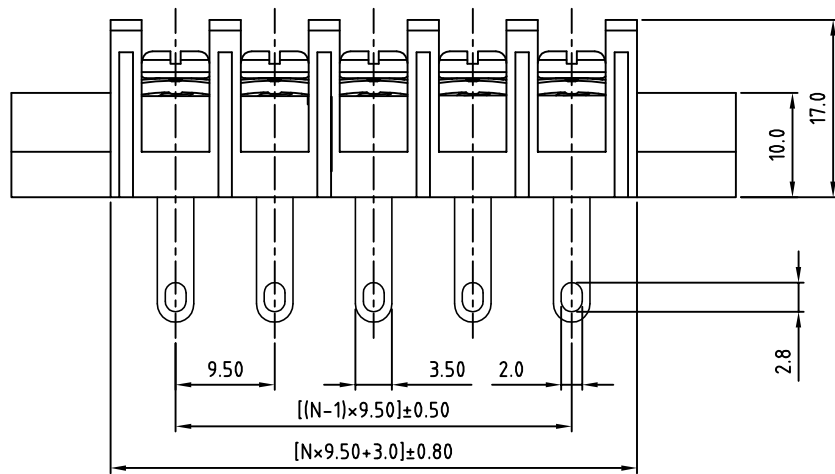

PART NUMBER: **OSTYK505XX330**

NO. OF POLES

02: 2 POLES

03: 3 POLES

04: 4 POLES

...

30: 30 POLES

N=Number of poles

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTYK-505 W/Flange&W/O Cover Series							
PART NO.		OSTYK505XX330				DWG NO.		OSTYK505XX330.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance				
Shi Jun 2007.07.18	Seamus 2007.07.18	LUCY 2007.7.18	LUCY 2007.7.18		UNIT: mm		X. ±0.50		
					SCALE: NONE		X.X ±0.30		
					SHEET: 01/01		X.XX ±0.10		
					REV.: B		X° ±1°		