

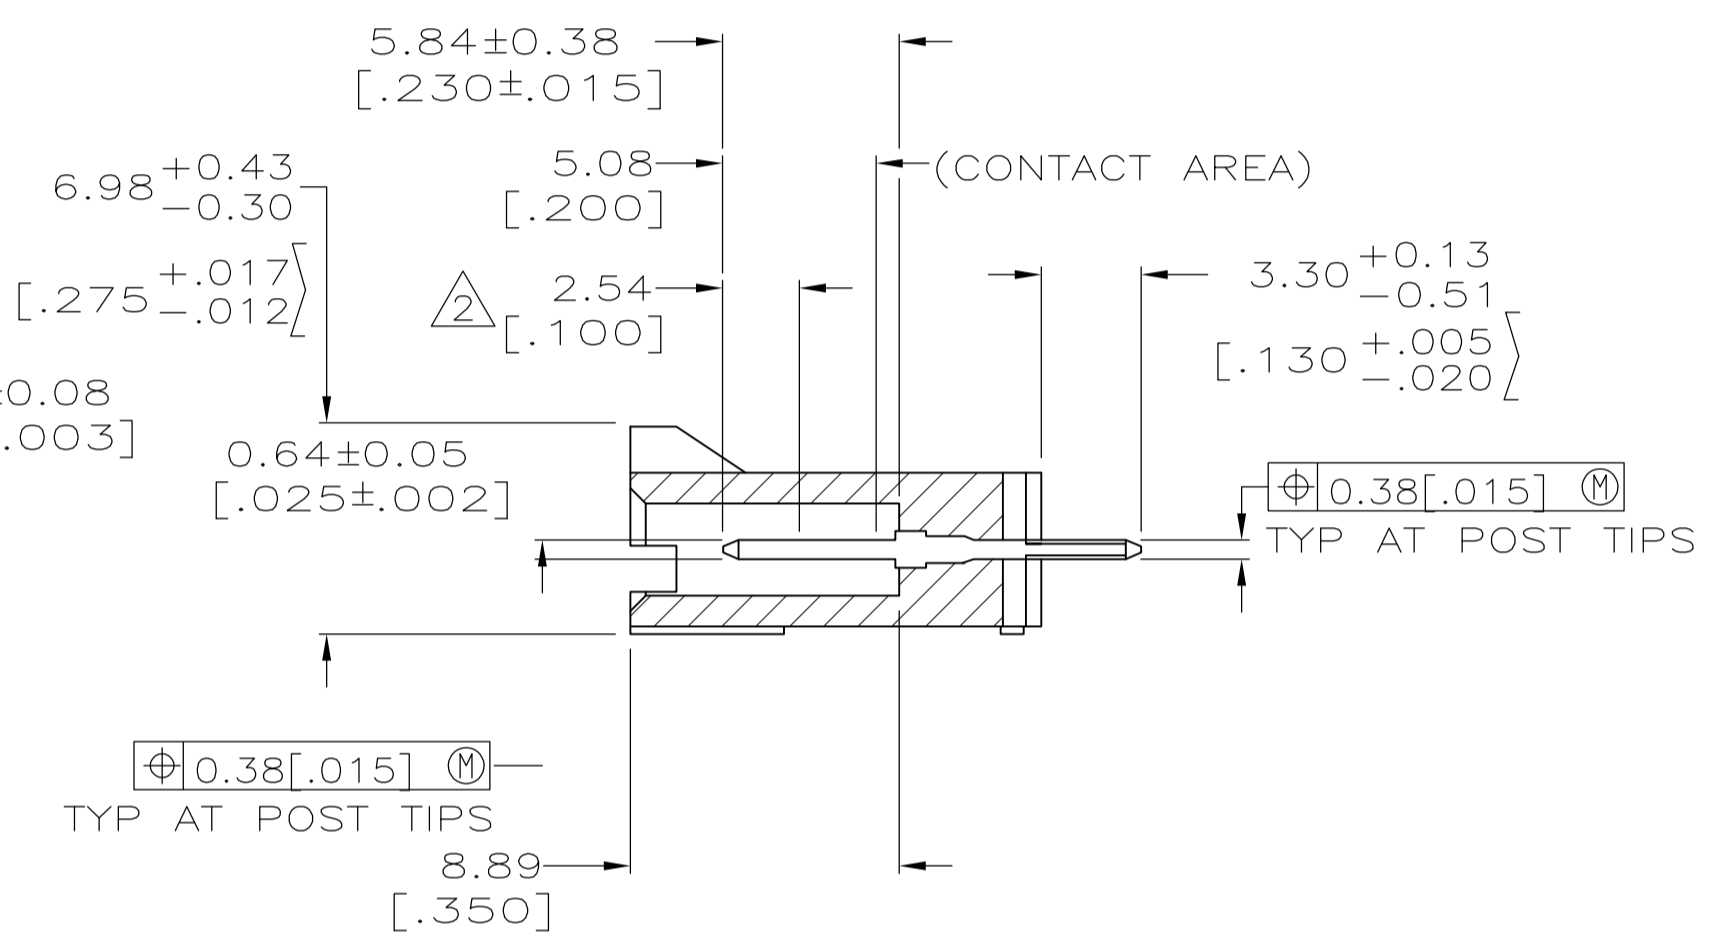


DETAIL Z  
POST DETAIL TYP  
2 POST MINIMUM

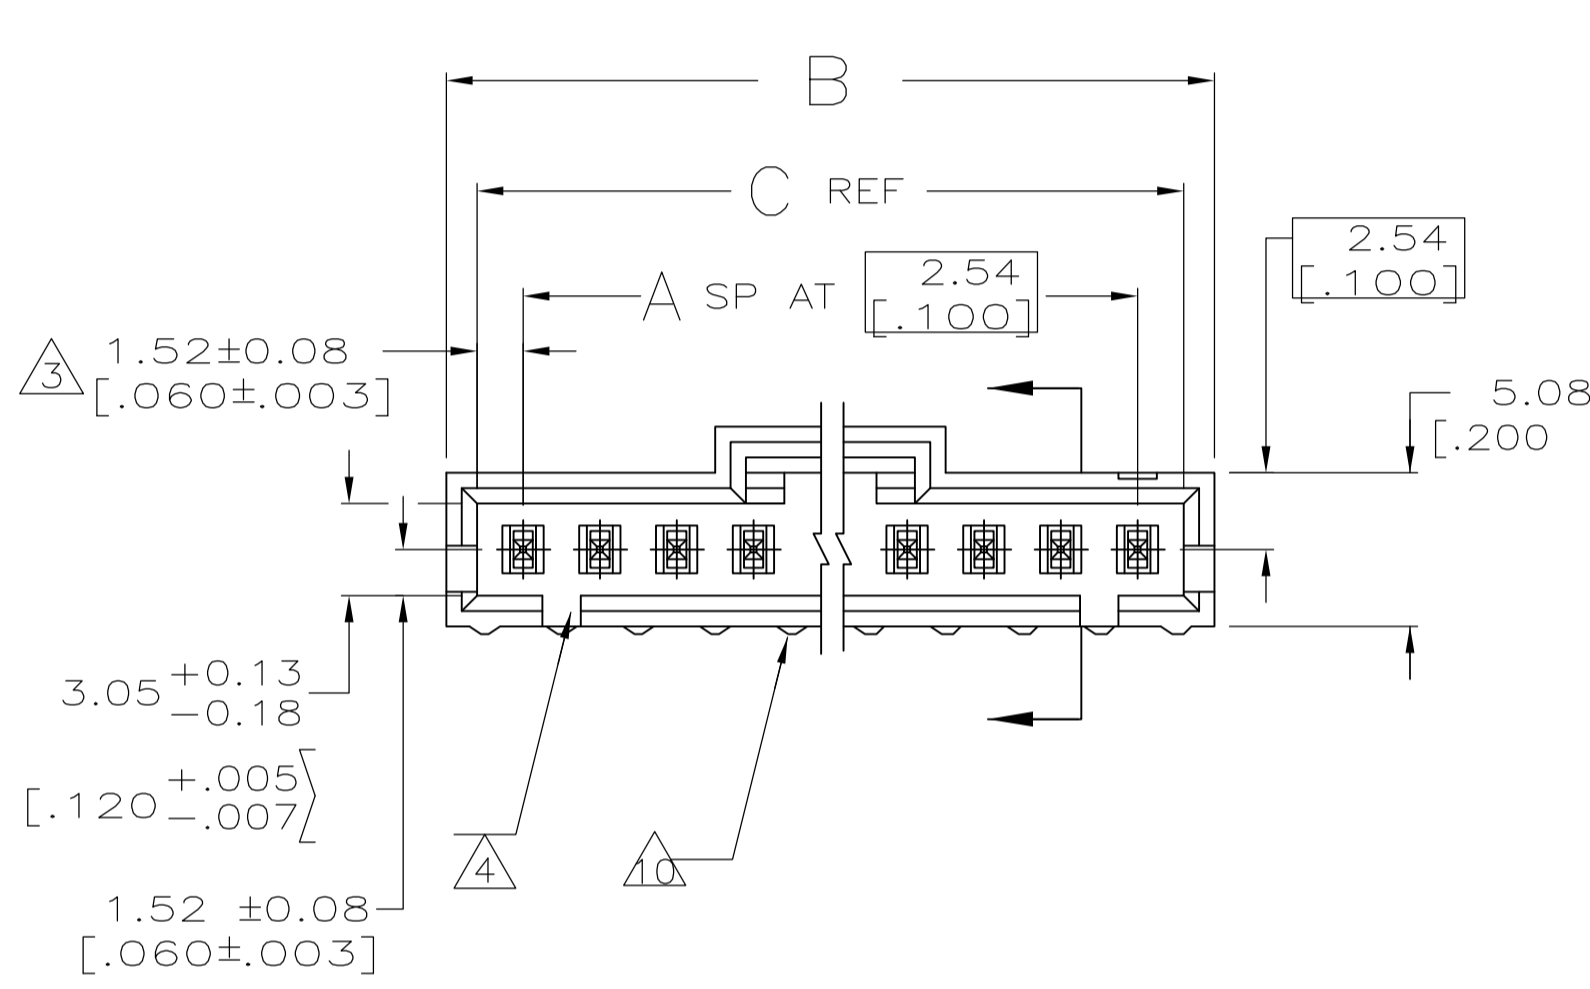

$\triangle 6$	23.37 [.920]	25.40 [1.000]	8	9	3-103669-0
$\triangle 6$	8.13 [.320]	10.16 [.400]	2	3	2-103669-9
$\triangle 6$	15.75 [.620]	17.78 [.700]	5	6	2-103669-8
$\triangle 6$	13.21 [.520]	15.24 [.600]	4	5	2-103669-7
$\triangle 6$	10.67 [.420]	12.70 [.500]	3	4	2-103669-6
$\triangle 6$	5.59 [.220]	7.62 [.300]	1	2	2-103669-5
$\triangle 11$	64.01 [2.520]	66.04 [2.600]	24	25	2-103669-4
$\triangle 11$	61.47 [2.420]	63.50 [2.500]	23	24	2-103669-3
$\triangle 11$	58.93 [2.320]	60.96 [2.400]	22	23	2-103669-2
$\triangle 11$	56.39 [2.220]	58.42 [2.300]	21	22	2-103669-1
$\triangle 11$	53.85 [2.120]	55.88 [2.200]	20	21	2-103669-0
$\triangle 11$	51.31 [2.020]	53.34 [2.100]	19	20	1-103669-9
$\triangle 11$	48.77 [1.920]	50.80 [2.000]	18	19	1-103669-8
$\triangle 11$	46.23 [1.820]	48.26 [1.900]	17	18	1-103669-7
$\triangle 11$	43.69 [1.720]	45.72 [1.800]	16	17	1-103669-6
$\triangle 11$	41.15 [1.620]	43.18 [1.700]	15	16	1-103669-5
$\triangle 11$	38.61 [1.520]	40.64 [1.600]	14	15	1-103669-4
$\triangle 11$	36.07 [1.420]	38.10 [1.500]	13	14	1-103669-3
$\triangle 11$	33.53 [1.320]	35.56 [1.400]	12	13	1-103669-2
$\triangle 11$	30.99 [1.220]	33.02 [1.300]	11	12	1-103669-1
$\triangle 11$	28.45 [1.120]	30.48 [1.200]	10	11	1-103669-0
$\triangle 11$	25.91 [1.020]	27.94 [1.100]	9	10	103669-9
$\triangle 11$	23.37 [.920]	25.40 [1.000]	8	9	103669-8
$\triangle 11$	20.83 [.820]	22.86 [.900]	7	8	103669-7
$\triangle 11$	18.29 [.720]	20.32 [.800]	6	7	103669-6
$\triangle 11$	15.75 [.620]	17.78 [.700]	5	6	103669-5
$\triangle 11$	13.21 [.520]	15.24 [.600]	4	5	103669-4
$\triangle 11$	10.67 [.420]	12.70 [.500]	3	4	103669-3
$\triangle 11$	8.13 [.320]	10.16 [.400]	2	3	103669-2
$\triangle 11$	5.59 [.220]	7.62 [.300]	1	2	103669-1
PLATING	C	B	A	NO. OF POSN	PART NO.

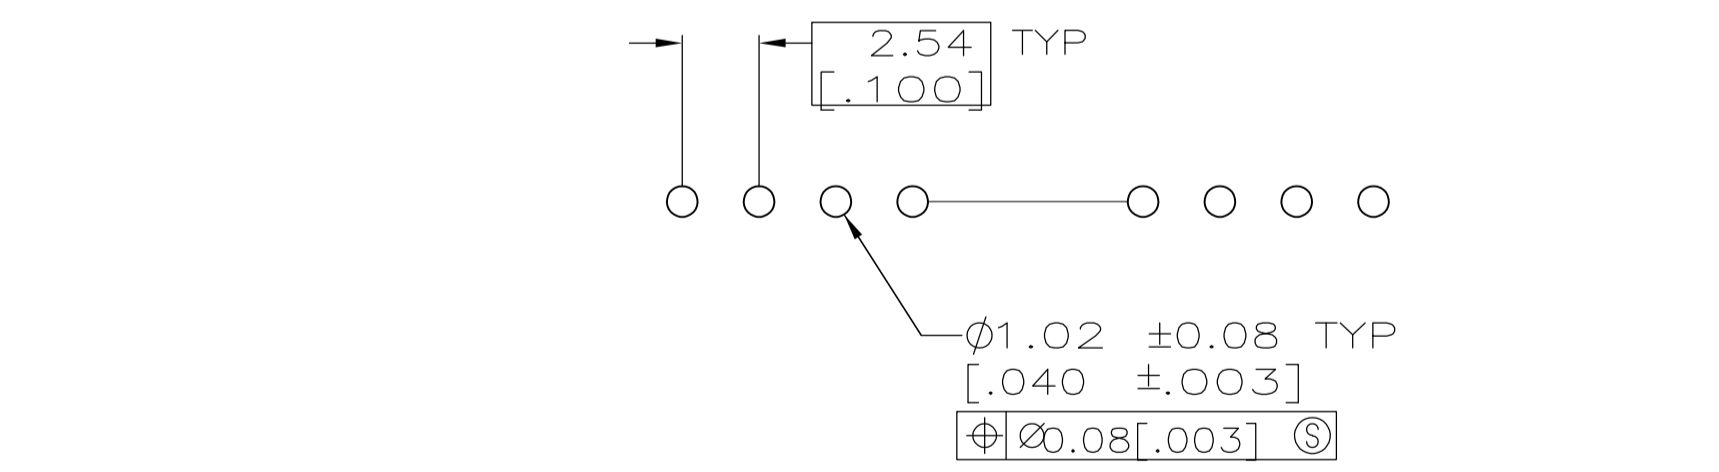

RECOMMENDED HOLE LAYOUT

- $\triangle 1$  .000100 BRIGHT TIN-LEAD OVER .000050 NICKEL.
- $\triangle 2$  POINT OF MEASUREMENT FOR PLATING THICKNESS.
- $\triangle 3$  THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- $\triangle 4$  ON ASSEMBLIES WITH FOUR OR MORE POSITIONS, TWO POLARIZATION SLOTS. ON ASSEMBLIES WITH TWO OR THREE POSITIONS, ONE POLARIZATION SLOT.
- $\triangle 5$  SELECT POST TAILS FORMED TO PROVIDE CONNECTOR HOLD DOWN UNTIL SOLDERED. CONFIGURATION ACCEPTS 0.69[.027]-2.03[.080] THICK PRINTED CIRCUIT BOARD. ( SEE DETAIL Z ).
- $\triangle 6$  .000100 BRIGHT TIN OVER .000050 NICKEL.
- $\triangle 7$  PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- $\triangle 8$  .000100 MATTE TIN OVER .000050 NICKEL.
- $\triangle 9$  HIGH TEMPERATURE CONFIGURATION.
- $\triangle 10$  STANDOFFS NOT PRESENT ON UNDERSIDE OF ASSEMBLY
- $\triangle 11$  OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



















































THIS DRAWING IS A CONTROLLED DOCUMENT.


DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN S. SHUEY 3-5-91	APVD M. RIDER 2-14-92	NAME
0 PLC ± -	1 PLC ± -	2 PLC ± 0.13[.005]	3 PLC ± -	4 PLC ± -
ANGLES	± -	APVD M. RIDER 2-14-92	PRODUCT SPEC	108-25034
MATERIAL HOUSING:	SEE TABLE	APPLICATION SPEC	114-25026	SIZE
		WEIGHT	A1 00779	DRAWING NO
		CUSTOMER DRAWING	SCALE 4:1	SHEET 1 OF 2

STE TE Connectivity

HDR ASSY, VERT, SINGLE ROW  
2.54 [100] C/L 0.64 [025] SQ POST  
WITH PLZN, AMPMODU MTE

RESTRICTED TO

<p>OBSOLETE</p> 			64.01 [2.520]	66.04 [2.600]	24	25	7-103669-4	
			61.47 [2.420]	63.50 [2.500]	23	24	7-103669-3	
			58.93 [2.320]	60.96 [2.400]	22	23	7-103669-2	
			56.39 [2.220]	58.42 [2.300]	21	22	7-103669-1	
			53.85 [2.120]	55.88 [2.200]	20	21	7-103669-0	
			51.31 [2.020]	53.34 [2.100]	19	20	6-103669-9	
			48.77 [1.920]	50.80 [2.000]	18	19	6-103669-8	
			46.23 [1.820]	48.26 [1.900]	17	18	6-103669-7	
			43.69 [1.720]	45.72 [1.800]	16	17	6-103669-6	
			41.15 [1.620]	43.18 [1.700]	15	16	6-103669-5	
				38.61 [1.520]	40.64 [1.600]	14	15	6-103669-4
			36.07 [1.420]	38.10 [1.500]	13	14	6-103669-3	
			33.53 [1.320]	35.56 [1.400]	12	13	6-103669-2	
			30.99 [1.220]	33.02 [1.300]	11	12	6-103669-1	
			28.45 [1.120]	30.48 [1.200]	10	11	6-103669-0	
			25.91 [1.020]	27.94 [1.100]	9	10	5-103669-9	
			23.37 [.920]	25.40 [1.000]	8	9	5-103669-8	
			20.83 [.820]	22.86 [.900]	7	8	5-103669-7	
			18.29 [.720]	20.32 [.800]	6	7	5-103669-6	
			15.75 [.620]	17.78 [.700]	5	6	5-103669-5	
		13.21 [.520]	15.24 [.600]	4	5	5-103669-4		
		10.67 [.420]	12.70 [.500]	3	4	5-103669-3		
		8.13 [.320]	10.16 [.400]	2	3	5-103669-2		
		5.59 [.220]	7.62 [.300]	1	2	5-103669-1		
REMARKS	PLATING	C	B	A	NO. OF POSN	PART NO.		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DN S. SHUEY 3-5-91	 TE Connectivity
DIMENSIONS: INCHES		CHK M. RIDER 2-14-92	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. RIDER 2-14-92	NAME
0 PL ± - 1 PL ± - 2 PL ± 0.13[.005] 3 PL ± - 4 PL ± - ANGLES ± -		PRODUCT SPEC 108-25034	HDR ASSY, VERT, SINGLE ROW 2.54 [.100] C/L 0.64 [.025] SQ POST WITH PLZN, AMPMODU MTE
MATERIAL HOUSING: FINISH SEE TABLE		APPLICATION SPEC 114-25026	SIZE A1
		WEIGHT -	CAGE CODE 00779
		CUSTOMER DRAWING	DRAWING NO 103669
		SCALE 4:1	RESTRICTED TO -
		SHEET 2	REV AA2