


1. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
2. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
3. .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
4. .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
5. PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
6. HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.
7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

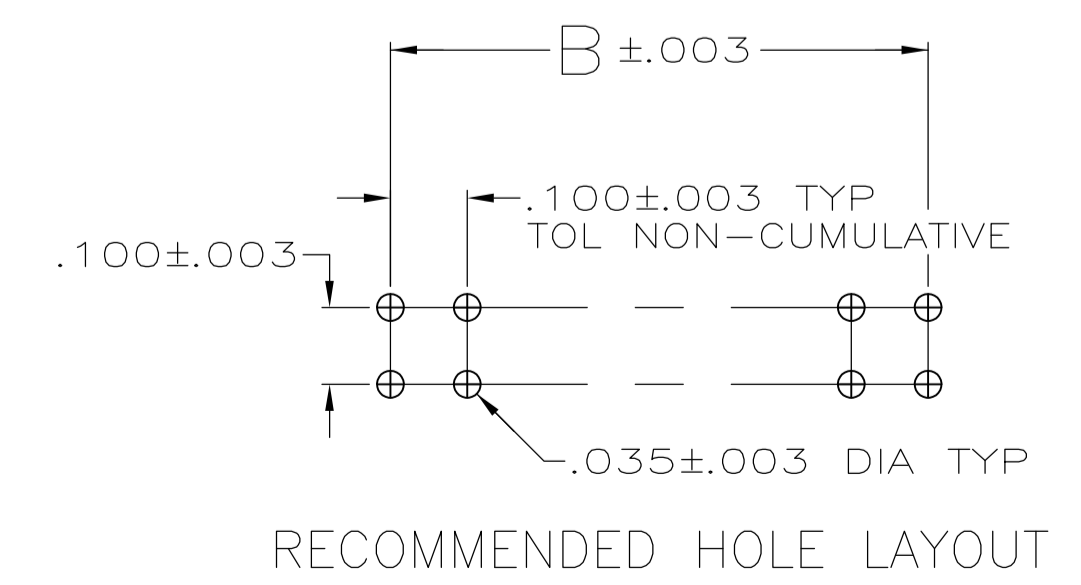

△	△	1.684	1.600	16	34	4-103322-7	
△	△	1.184	1.100	11	24	4-103322-6	
△	△	.584	.500	5	12	4-103322-5	
△	△	.284	.200	2	6	4-103322-4	
△	△	.084	—	—	2	4-103322-3	
△	△	3.984	3.900	39	80	4-103322-2	
△	△	.484	.400	4	10	4-103322-1	
△	△	3.984	3.900	39	80	4-103322-0	
△	△	3.884	3.800	38	78	3-103322-9	
△	△	3.784	3.700	37	76	3-103322-8	
△	△	3.684	3.600	36	74	3-103322-7	
△	△	SUPERSEDED BY 8-146250-6	3.584	3.500	35	72	3-103322-6
△	△	OBSOLETE	3.484	3.400	34	70	3-103322-5
△	△	OBSOLETE	3.384	3.300	33	68	3-103322-4
△	△	OBSOLETE	3.284	3.200	32	66	3-103322-3
△	△	OBSOLETE	3.184	3.100	31	64	3-103322-2
△	△	OBSOLETE	3.084	3.000	30	62	3-103322-1
△	△	OBSOLETE	2.984	2.900	29	60	3-103322-0
△	△	OBSOLETE	2.884	2.800	28	58	2-103322-9
△	△	OBSOLETE	2.784	2.700	27	56	2-103322-8
△	△	OBSOLETE	2.684	2.600	26	54	2-103322-7
△	△	OBSOLETE	2.584	2.500	25	52	2-103322-6
△	△	OBSOLETE	2.484	2.400	24	50	2-103322-5
△	△	OBSOLETE	2.384	2.300	23	48	2-103322-4
△	△	OBSOLETE	2.284	2.200	22	46	2-103322-3
△	△	OBSOLETE	2.184	2.100	21	44	2-103322-2
△	△	OBSOLETE	2.084	2.000	20	42	2-103322-1
△	△	SUPERSEDED BY 7-146250-0	1.984	1.900	19	40	2-103322-0
△	△	OBSOLETE	1.884	1.800	18	38	1-103322-9
△	△	OBSOLETE	1.784	1.700	17	36	1-103322-8
△	△	OBSOLETE	1.684	1.600	16	34	1-103322-7
△	△	OBSOLETE	1.584	1.500	15	32	1-103322-6
△	△	OBSOLETE	1.484	1.400	14	30	1-103322-5
△	△	OBSOLETE	1.384	1.300	13	28	1-103322-4
△	△	OBSOLETE	1.284	1.200	12	26	1-103322-3
△	△	OBSOLETE	1.184	1.100	11	24	1-103322-2
△	△	OBSOLETE	1.084	1.000	10	22	1-103322-1
△	△	SUPERSEDED BY 6-146250-0	.984	.900	9	20	1-103322-0
△	△	OBSOLETE	.884	.800	8	18	103322-9
△	△	OBSOLETE	.784	.700	7	16	103322-8
△	△	OBSOLETE	.684	.600	6	14	103322-7
△	△	OBSOLETE	.584	.500	5	12	103322-6
△	△	OBSOLETE	.484	.400	4	10	103322-5
△	△	OBSOLETE	.384	.300	3	8	103322-4
△	△	OBSOLETE	.284	.200	2	6	103322-3
△	△	OBSOLETE	.184	.100	1	4	103322-2
△	△	SUPERSEDED BY 5-146250-1	.084	—	—	2	103322-1

PLATING	C	B	A	NO OF POSN	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0. PLC ± - 1. PLC ± - 2. PLC ± - 3. PLC ± .005 4. PLC ± - ANGLES ± - MATERIAL PHOSPHOR BRONZE FINISH SEE TABLE. THIS DRAWING IS A CONTROLLED DOCUMENT. DIN J.MARTINELLI 15OCT92 CJK JOHN KNITTLE 23NOV92 APVD B.FLINCHBAUGH 23NOV92 NAME ASSEMBLY, HEADER, BREAKAWAY, MOD II, DOUBLE ROW, .100 X .100 C/L, VERTICAL WITH .025 SQUARE POSTS APPLICATION SPEC SIZE A1 CAGE CODE 00779 DRAWING NO. 103322 WEIGHT — CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 1 REV K2					