



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS				
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		L1		REV PER ECO-10-000443	13JAN10	KK	AEG	

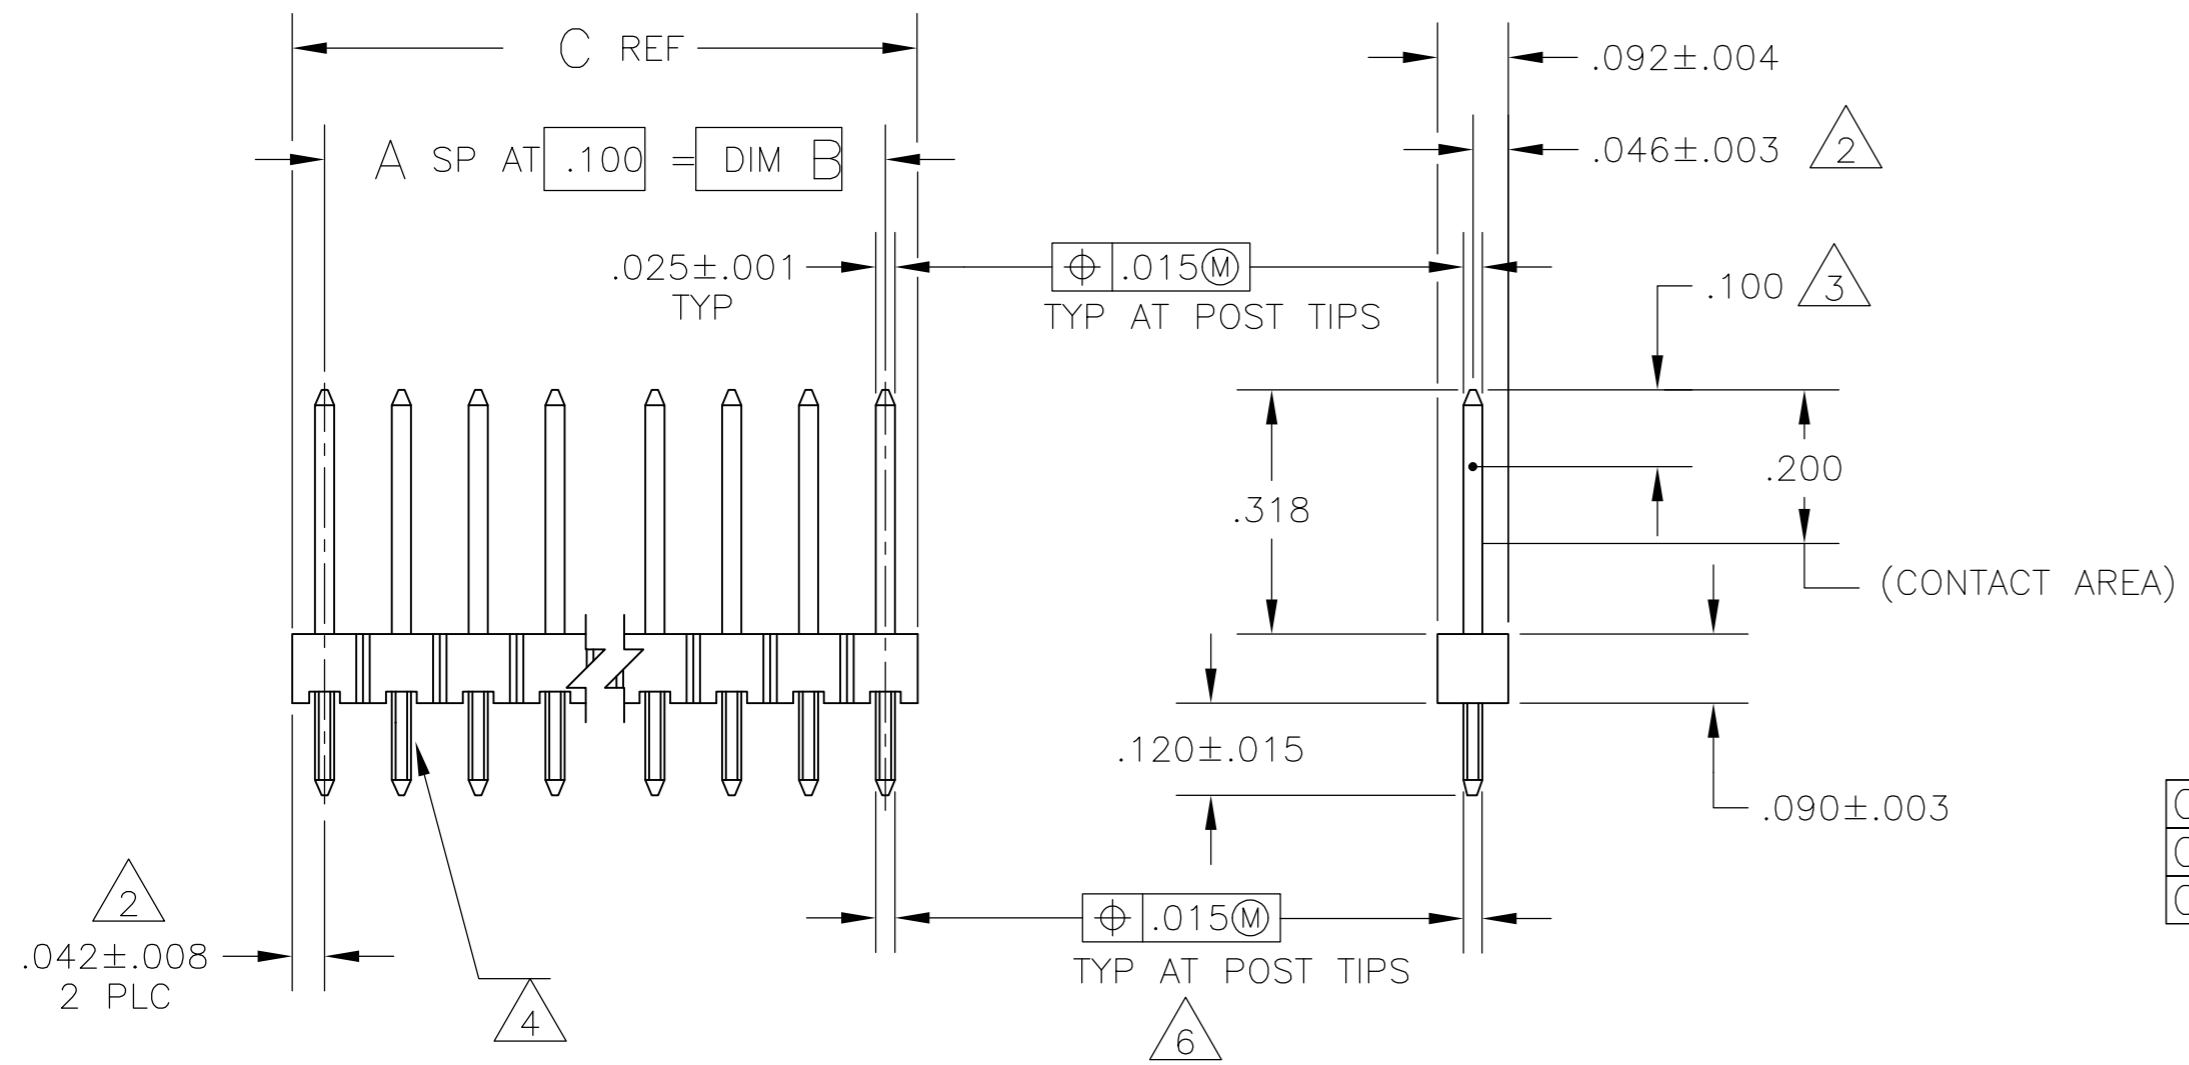

1. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
2. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
3. POINT OF MEASUREMENT FOR PLATING THICKNESS.
4. RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
5. PARTS INDICATED ARE PACKED IN SINGLE TUBES.
6. $\varnothing .020 (M)$ FOR KINKED TAILS
7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE-SUPERSEDED BY 104427-7	$\varnothing .020 (M)$.884	.800	8	9	3-104427-0
OBSOLETE-SUPERSEDED BY 104427-6	$\varnothing .020 (M)$.784	.700	7	8	2-104427-9
OBSOLETE-SUPERSEDED BY 104427-5	$\varnothing .020 (M)$.684	.600	6	7	2-104427-8
		3.984	3.900	39	40	2-104427-7
		3.484	3.400	34	35	2-104427-6
		2.984	2.900	29	30	2-104427-5
		2.584	2.500	25	26	2-104427-4
		2.484	2.400	24	25	2-104427-3
		2.384	2.300	23	24	2-104427-2
		2.284	2.200	22	23	2-104427-1
		2.184	2.100	21	22	2-104427-0
		2.084	2.000	20	21	1-104427-9
		1.984	1.900	19	20	1-104427-8
		1.884	1.800	18	19	1-104427-7
		1.784	1.700	17	18	1-104427-6
		1.684	1.600	16	17	1-104427-5
		1.584	1.500	15	16	1-104427-4
		1.484	1.400	14	15	1-104427-3
		1.384	1.300	13	14	1-104427-2
		1.284	1.200	12	13	1-104427-1
		1.184	1.100	11	12	1-104427-0
		1.084	1.000	10	11	1-104427-9
		.984	.900	9	10	1-104427-8
		.884	.800	8	9	104427-7
		.784	.700	7	8	104427-6
		.684	.600	6	7	104427-5
		.584	.500	5	6	104427-4
		.484	.400	4	5	104427-3
		.384	.300	3	4	104427-2
		.284	.200	2	3	104427-1
REMARKS	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER	

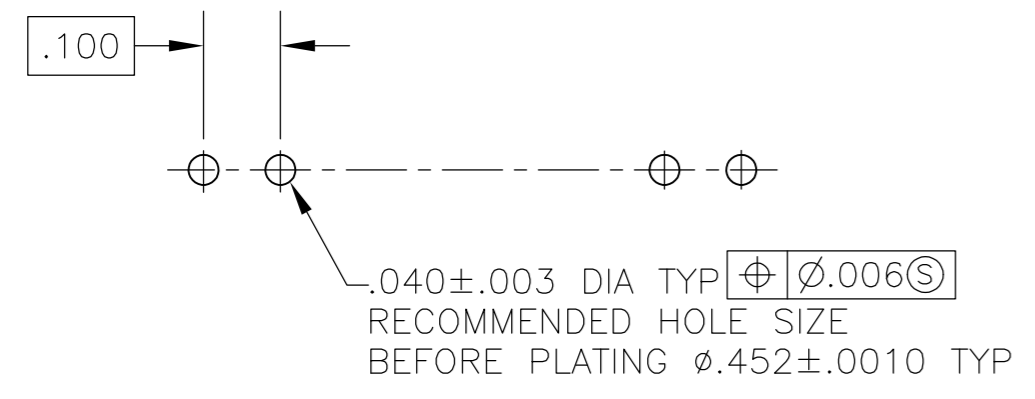

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	H MOLL	28JUN88
CHK	R. FEIDT	28JUN88
APVD	R. FEIDT	28JUN88
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT	-	
CUSTOMER DRAWING		

DIMENSIONS: INCHES
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± -
 3 PLC ± .005
 4 PLC ± -
 ANGLES ± -

MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR-BLACK
 FINISH: .00015 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL
 POSTS: PHOSPHOR BRONZE

Tyco Electronics Corporation
 Harrisburg, Pa 17105-3608
 NAME: HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100 CL, VERT, .025 SQ POSTS, WITH RETENTION FEATURE
 SIZE: A2 CAGE CODE: - DRAWING NO: C=104427 RESTRICTED TO: -
 SCALE: 4:1 SHEET 1 OF 1 REV L1