


- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- 2 THE NOTED DIMENSION APPLIES FROM THE BASIC DIMENSION (NOT THE POST CENTERLINE) TO THE SURFACE INDICATED.
- 3 0.000762[.000030] GOLD ON CONTACT AREA, 0.00254-0.00508[.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL.
- 4 HOUSING: LCP, COLOR-BLACK. POSTS: PHOSPHOR BRONZE.
- 5 0.000762[.000030] GOLD ON CONTACT AREA, 0.00254-0.00508[.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

PLATING	C	B	A	NO OF POSN	PART NUMBER
OB	35.56 [1.400]	14	37.69 [1.484]	30	6-146131-4
OB	33.02 [1.300]	13	35.15 [1.384]	28	6-146131-3
OB	30.48 [1.200]	12	32.61 [1.284]	26	6-146131-2
OB	27.94 [1.100]	11	30.07 [1.184]	24	6-146131-1
OB	25.40 [1.000]	10	27.53 [1.084]	22	6-146131-0
OB	22.86 [.900]	9	24.99 [.984]	20	5-146131-9
OB	20.32 [.800]	8	22.45 [.884]	18	5-146131-8
OB	17.78 [.700]	7	19.91 [.784]	16	5-146131-7
OB	15.24 [.600]	6	17.37 [.684]	14	5-146131-6
OB	12.70 [.500]	5	14.83 [.584]	12	5-146131-5
OB	10.16 [.400]	4	12.29 [.484]	10	5-146131-4
OB	7.62 [.300]	3	9.75 [.384]	8	5-146131-3
OB	5.08 [.200]	2	7.21 [.284]	6	5-146131-2
OB	2.54 [.100]	1	4.67 [.184]	4	5-146131-1
OB	35.56 [1.400]	14	37.69 [1.484]	30	1-146131-4
OB	33.02 [1.300]	13	35.15 [1.384]	28	1-146131-3
OB	30.48 [1.200]	12	32.61 [1.284]	26	1-146131-2
OB	27.94 [1.100]	11	30.07 [1.184]	24	1-146131-1
OB	25.40 [1.000]	10	27.53 [1.084]	22	1-146131-0
OB	22.86 [.900]	9	24.99 [.984]	20	146131-9
OB	20.32 [.800]	8	22.45 [.884]	18	146131-8
OB	17.78 [.700]	7	19.91 [.784]	16	146131-7
OB	15.24 [.600]	6	17.37 [.684]	14	146131-6
OB	12.70 [.500]	5	14.83 [.584]	12	146131-5
OB	10.16 [.400]	4	12.29 [.484]	10	146131-4
OB	7.62 [.300]	3	9.75 [.384]	8	146131-3
OB	5.08 [.200]	2	7.21 [.284]	6	146131-2
OB	2.54 [.100]	1	4.67 [.184]	4	146131-1

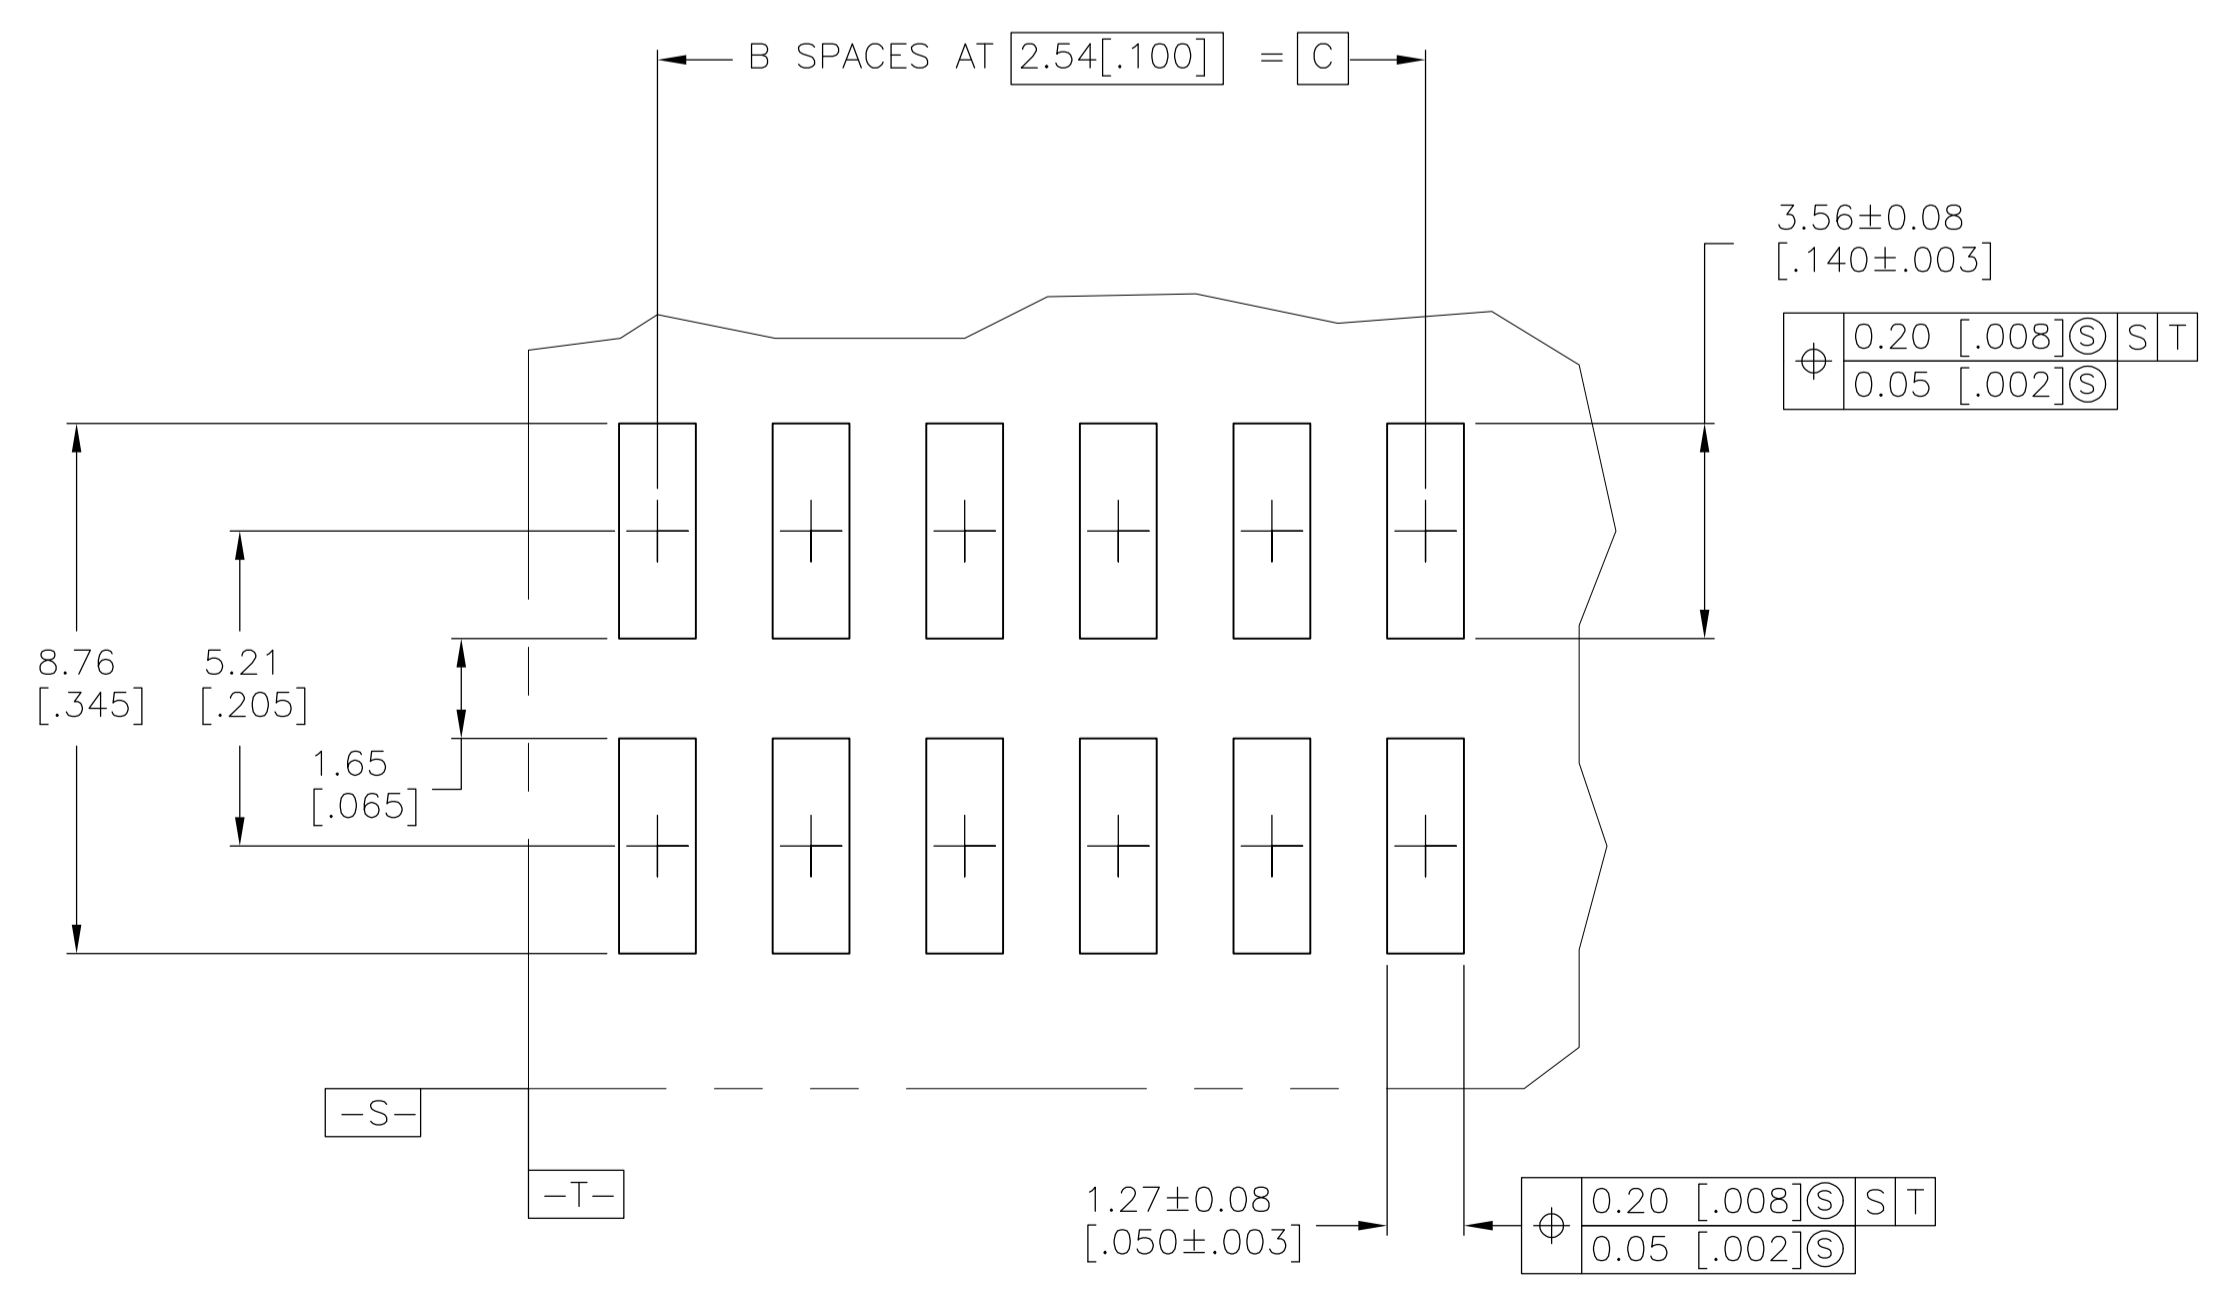

RECOMMENDED PCB LAYOUT FOR USE WITH .008 THICK STENCIL

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN J. KNAUB 30-09-94	30-09-94	 TE Connectivity
0 PL ± -	1 PL ± -	APVD G. DUBNICZKI 30-09-94	NAME	
2 PL ± ± 0.13[.005]	3 PL ± ± -	PRODUCT SPEC	APPLICATION SPEC	SURFACE MOUNT HEADER ASSEMBLY, MOD II, BREAKAWAY, VERTICAL, DOUBLE ROW, .100 X.100 C/L, .025 SQ.POST
4 PL ± ± -	ANGLES ± ± -	SIZE	CAGE CODE DRAWING NO	
MATERIAL	FINISH SEE TABLE	WEIGHT	A1 00779 C=146131	RESTRICTED TO
		CUSTOMER DRAWING	SCALE 8:1	SHEET 1 OF 1 REV H2